

NATIONAL WEATHER SERVICE INSTRUCTION 10-811

SEPTEMBER 2, 2025

Operations and Services

Aviation Weather Services, NWSPD 10-8

EN ROUTE FORECASTS AND ADVISORIES

NOTICE: This publication is available at: <http://www.weather.gov/directives/>.

OPR: W/AFS24 (M. Graf)

Certified by: W/AFS24 (K.Stone)

Type of Issuance: Routine

SUMMARY OF REVISIONS: This directive supersedes NWS Instruction 10-811, *En route Forecasts and Advisories*, dated September 26, 2022. Changes include:

- Added IFR criteria for dust and sand SIGMET
- Allowed each MWO an option for reporting VA SIGMET intensity.
- Changed “met conditions” to “flight rules” in the appendix
- Changed name references of Gulf of Mexico to Gulf of America
- Removed the ROFOR product for the Honolulu Forecast Office.
- Removed Area Forecast (FA) for Gulf of America, Caribbean and Hawaii
- Removed CONUS AIRMET
- Added ICAO Meteorological Information Exchange Model (IWXXM) and US Weather Exchange (WX), Appendix E

August 19, 2025

Allison Allen

Date

Director, Analyze, Forecast, and Support Office

En Route Forecasts and Advisories

Table of Contents	Page
1. Purpose.....	3
2. General.....	3
3. Responsibility for Issuance.....	4
4. Standardization.....	4
5. Area Forecast (FA).....	5
5.1 FA Description.....	5
5.2 FA Amendments.....	6
5.3 FA Corrections.....	6
6. Significant Meteorological Information (SIGMET).....	7
6.1 Non-Convective SIGMET Description.....	7
6.1.1 Issuance Criteria.....	7
6.1.2 Issuance Time and Valid Period.....	7
6.1.3 SIGMET Format.....	8
6.1.4 SIGMET Cancellations.....	8
6.1.5 SIGMET Amendments.....	8
6.1.6 SIGMET Corrections.....	8
6.2 Convective SIGMET Description.....	9
6.2.1 Routine Issuance Criteria.....	9
6.2.2 Special Issuance Criteria.....	9
6.2.3 Issuance Time and Valid Period.....	9
6.2.4 Convective SIGMET Format.....	9
6.2.5 Convective SIGMET Outlook.....	9
6.2.6 Convective SIGMET Cancellations.....	10
6.2.7 Convective SIGMET Amendments.....	10
6.2.8 Convective SIGMET Corrections.....	10
6.3 International, Alaska, and Hawaii SIGMET Description.....	10
6.3.1 Issuance Criteria.....	10
6.3.1.1 International SIGMET for Volcanic Ash Cloud.....	11
6.3.1.2 International SIGMET for Tropical Cyclone.....	11
6.3.2 Format.....	12
6.3.3 International SIGMET Cancellations.....	12
6.3.4 International SIGMET Amendments.....	12
6.3.5 International SIGMET Corrections.....	12
6.3.6 Interchange of SIGMETs between Adjacent U.S. Offices.....	13
6.3.7 Continuous SIGMET Criteria across Adjacent Boundaries.....	13
6.3.8 SIGMET Naming Convention for the Met Watch Offices (MWOs).....	13
7. Airmen's Met Information (AIRMET) and Graphical AIRMET (G-AIRMET).....	14
7.1 AIRMET/G-AIRMET Criteria.....	14
7.2 AIRMET/G-AIRMET Issuance Times and Valid Period.....	15
7.3 AIRMET/G-AIRMET Format.....	15
7.4 AIRMET/G-AIRMET Updates and Amendments.....	16
7.5 AIRMET/G-AIRMET Corrections.....	16
8. Traffic Flow Management (TFM) Convective Forecast (TCF).....	16

8.1 TCF Criteria.....	17
8.2 TCF Format.....	17
8.3 TCF Issuance Times and Valid Period.....	17
8.4 TCF Updates, Amendments, and Corrections.....	17
APPENDIX A - Examples.....	A-1
APPENDIX B - WMO Headers.....	B-1
APPENDIX C - Areas of Responsibility.....	C-1
APPENDIX D - Definition of Terms.....	D-1
APPENDIX E – XML.....	E-1

1 Purpose

This instruction describes the content and preparation of aviation En Route forecasts and advisories prepared and issued by National Oceanic and Atmospheric Administration (NOAA) National Weather Service (NWS) offices. En route forecasts and advisories include the Area Forecast (FA), Significant Meteorological Information (SIGMET), Airmen’s Meteorological Information (AIRMET), Graphical Airmen’s Meteorological Information (G-AIRMET), Tropical Cyclone Advisory (TCA), Volcanic Ash Advisory (VAA), Route Forecast (ROFOR), and Traffic Flow Management Convective Forecast (TCF). TCAs and VAAs provide coverage for their respective areas of responsibility per international agreements; please refer to NWS Instruction (NWS) 10-601, *Tropical Cyclone Products*, and NWSI 10-1501, *Volcanic Ash Advisory Centers*, respectively, for information about these products. En route forecasts and advisories issued by Center Weather Service Units (CWSU) may be found in NWSI 10-803, *Support to Air Traffic Control Facilities*. Information on the Aviation Watch Notification Message issued by the Storm Prediction Center may be found in NWSI 10-512, *National Severe Weather Products Specification*. Information on space weather products is found in NWSI 10-1101, *Space Weather Products*.

At the time of this writing, extensive effort is going into producing and disseminating extensible Markup Language (XML) versions of many NWS aviation products in order to meet international standards. Throughout the document, an attempt is made to denote specific characteristics and nuances associated with these new products.

2 General

The FA, SIGMET, AIRMET, G-AIRMET and TCF products provide forecast and advisory coverage for aviation forecast users operating within the U.S. domestic Flight Information Regions (FIRs). Some of these products also provide forecast and advisory services for Atlantic and Pacific oceanic FIRs and the Gulf of America. General definitions of each product follow.

1. FA: An area forecast in abbreviated plain language concerning the occurrence or

expected occurrence of specified en route weather phenomena.

2. AIRMET: An advisory in abbreviated plain language concerning the occurrence or expected occurrence of specified en route weather phenomena that may affect the safety of aircraft operations, but at intensities that do not meet SIGMET criteria. The G-AIRMET conveys AIRMET conditions using greater temporal and spatial resolution.
3. SIGMET: A warning in abbreviated plain language concerning the occurrence or expected occurrence of hazardous en route weather phenomena that may affect the safety of aircraft operations. SIGMETs are of highest priority among all meteorological products provided to aviation users.
4. TCF: A collaboratively generated graphic used in air traffic flow planning that forecasts areas of convection.

3 Responsibility for Issuance

The NWS operates three (3) Meteorological Watch Offices (MWO), the Aviation Weather Center (AWC), the Alaska Aviation Weather Unit (AAWU), and the Weather Forecast Office (WFO) in Honolulu. The FA, SIGMETs, AIRMETs, and G-AIRMETs included in this instruction are produced and issued by MWOs; their areas of responsibility are shown in Appendix C and described below.

1. AWC:
 - a. Twenty (20) domestic Air Route Traffic Control Center (ARTCC) Flight Information Regions (FIRs) covering the conterminous U.S. and adjacent coastal waters
 - b. New York, Houston, Miami, and San Juan Oceanic FIRs
 - c. The portion of the Oakland Oceanic FIR north of 30N latitude and east of 140W longitude
2. AAWU:
 - a. Anchorage Continental FIR
 - b. Anchorage Oceanic FIR
 - c. Arctic Oceanic FIR
3. WFO Honolulu:
 - a. The portion of the Oakland Oceanic FIR south of 30N latitude and west of 140W longitude

4 Standardization

All forecasts and in-flight advisories use the following standards. Where applicable, differences between the plain text version of a product and its XML counterpart are noted.

1. All referenced heights or altitudes will be referenced above mean sea level (MSL), unless otherwise noted, and annotated using the height in hundreds of feet, consisting of three digits (e.g., 040). For heights at or above 18,000 feet, the level will be preceded by FL (e.g., FL180).

2. For plain text products, references to latitude and longitude will be in degrees and minutes as follows: Nnn[nn] or Snn[nn], Wnnn[nn], or Ennn[nn]. A space is placed between latitude and longitude values and a space-hyphen-space between successive points (e.g., N6030 W15030 – N5800 W15200 – N5930 W15100). For XML products, latitude and longitude will be in decimal degrees. Negative latitude values represent the southern hemisphere, and negative longitude values represent the western hemisphere.
3. Plain text messages will be prepared in abbreviated plain language using contractions from the current Federal Aviation Administration (FAA) Order 7340.1 for domestic products and International Civil Aviation Organization (ICAO) Document 8400 for international products issued for Oceanic FIRs. A limited number of non-abbreviated words, geographical names and numerical values of a self-explanatory nature may also be used. XML products will follow a prescribed format according to a published schema. The particular schema used to build the product will be referenced in the header section of the product.
4. For plain text products, weather and obstructions to visibility will be described using the weather abbreviations for surface airways observations (METAR or SPECI). See the Federal Meteorological Handbook (FMH) No. 1 - Surface Observations. For XML products, the weather and obstructions to visibility will be provided according to the published schema for that product. The exact schema used can be found in the header near the beginning of the product.
5. For plain text products, heights will be identified as follows: 1) for heights below 3,000 feet, increments will be in 100s of feet; 2) for heights from 3,000 to 5,000 feet, increments will be in 500s of feet; and 3) for heights greater than 5,000 feet, increments will be in 1,000s of feet. For XML products, heights will be provided according to the published schema for that product. The exact schema used can be found in the header near the beginning of the product.

5 Area Forecast (FA)

The FA describes specific forecast conditions expected to affect at least a portion of the designated area of responsibility. The designated area includes Alaska, as outlined below. See Appendix C for area of responsibility maps. The AAWU should issue seven (7) FAs covering separate geographical areas of Alaska and the adjacent coastal waters, including the Pribilof Islands and Southeast Bering Sea.

5.1 FA Description

1. Vertical coverage: Each FA should cover the airspace between the surface and 45,000 feet MSL.
2. Horizontal coverage: Seven (7) FAs should be issued covering 25 geographical zones of Alaska and the adjacent coastal waters, including the Pribilof Islands and Southeast Bering Sea. See Appendix C.
3. Dissemination: Each FA should be issued three (3) times daily at 0415, 1215, and 2015 local Alaska Time or 0515, 1315, and 2115 UTC during standard time, and 0415, 1215,

and 2015 UTC during daylight saving time.

4. Content: Each FA will include the following elements—Clouds and weather, turbulence, and icing information in each geographical zone.
 - a. Synopsis: A brief description of the significant synoptic weather or presence of Volcanic Ash affecting the FA area during the first 18 hours of the forecast period.
 - b. Clouds and Weather: A description of the clouds and weather for each geographical zone during the first 12 hours of the forecast period including the following elements:
 - (1) AIRMET information for IFR ceiling and visibility, mountain obscuration, and strong surface winds
 - (2) Cloud amount (FEW, SCT, BKN, or OVC) with bases and tops for BKN and OVC layers
 - (3) Visibilities of 6 SM or less with obstruction(s) to visibility
 - (4) Precipitation and thunderstorms
 - (5) Surface wind greater than 20 knots
 - (6) Mountain pass conditions using categorical terms (for selected zones only)
 - (7) 6-hour categorical outlook (VFR, MVFR, and IFR)
 - c. Turbulence: a description of expected turbulence conditions including the following elements:
 - (1) AIRMET information for turbulence or low-level wind shear (LLWS).
 - (2) Turbulence not meeting AIRMET criteria.
 - (3) If no significant turbulence is forecast, NIL SIG will be entered.
 - d. Icing and freezing level: a description of expected icing conditions including the following elements:
 - (1) AIRMET information for icing and freezing precipitation
 - (2) Icing not meeting AIRMET criteria
 - (3) Freezing level
 - (4) If no significant icing is forecast, NIL SIG will be entered followed by the freezing level.

5.2 FA Amendments

FAs should be under continuous review and amended at the discretion of the forecaster. An amended FA will contain “AAA” after the date/time group on the WMO heading line for the first amendment, “AAB” for the second, and continuing for all subsequent amendments. “AMD” will be included after the date/time group on the FAA product line. The date/time group on the WMO and FAA lines will be updated to indicate the time of the correction. The ending valid time will remain unchanged.

5.3 FA Corrections

FAs containing errors should be corrected. A corrected FA will contain “CCA” after the date/time group on the WMO heading line for the first correction, “CCB” for the second, and continuing for all subsequent corrections. “COR” will be included after the date/time group on the FAA product line. The date/time group on the WMO and FAA lines will be updated to indicate the time of the correction. The ending valid time will remain unchanged.

NOTE: The FAA uses a time matching system to determine the most recent products. Therefore, amendments and corrections will carry the current time of the FA correction or amendment to ensure that the FA is updated in the FAA system. This is accomplished by manually changing the date/time group on the amended or corrected FA being issued.

6 Significant Meteorological Information (SIGMET)

A SIGMET is a concise description of the occurrence or expected occurrence of specified en route weather phenomena which is expected to affect the safety of aircraft operations. SIGMETs are intended for dissemination to all pilots in flight to enhance safety. SIGMETs will be issued by the responsible MWO as soon as is practical to alert operators and aircrews of hazardous en route conditions.

6.1 Non-Convective SIGMET Description

6.1.1 Issuance Criteria

AWC will issue a Non-Convective SIGMET when any of the following conditions are, in the judgment of the forecaster, expected to have a significant impact on the safety of aircraft operations.

- Severe (or greater) turbulence (SEV TURB)
- Severe icing (SEV ICE)
- Dust storm (WDSPR DS)
- Sandstorm (WDSPR SS)
- Volcanic ash cloud (VA)

6.1.2 Issuance Time and Valid Period

1. A SIGMET is an unscheduled product issued any time conditions reaching SIGMET criteria are occurring or expected to occur within a 4-hour period.
2. A SIGMET will have a valid period up to, but not exceeding, four (4) hours. SIGMETs for continuing phenomena will be reissued at least every 4 hours as long as SIGMET conditions continue to occur in the area for responsibility.

6.1.3 SIGMET Format

SIGMETs will be concise and not contain unnecessary descriptive information. See examples in Appendix A. For plain text products, the content and order of elements in the SIGMET will be as follows:

1. Series name and number.

2. Valid beginning and ending time (UTC).
3. List of states affected by the phenomena.
4. Location of phenomena delineated by high-altitude VHF (Very High Frequency) Omnidirectional Radio Range (VOR) coordinates covering the affected area during the SIGMET valid time.
5. Phenomena description (e.g., SEV ICE).
6. Vertical extent (base, top), if appropriate.
7. Movement, if appropriate.
8. Intensity change (INTSF, WKN, or NC), not included in domestic FIRs-but can be included in VA SIGMETs.
9. Indication of whether the condition will continue during the four (4) hours beyond the valid time of the SIGMET.

XML SIGMET products will be provided according to the published schema for that product. The exact schema used can be found in the header near the beginning of the product.

6.1.4 SIGMET Cancellations

A Non-Convective SIGMET will be canceled when the phenomena is no longer occurring, no longer expected to occur, or has moved out of the area of responsibility.

6.1.5 SIGMET Amendments

Amendments to Non-Convective SIGMETs will not be issued. Instead, a new SIGMET is issued using the next series number.

6.1.6 SIGMET Corrections

Corrections to Non-Convective SIGMETs will be issued as necessary.

NOTE: The FAA uses a time matching system to determine the most recent products. Therefore, corrections will carry the CURRENT time of the SIGMET to ensure the SIGMET is updated in the FAA system.

6.2 Convective SIGMET Description

6.2.1 Routine Issuance Criteria

AWC will issue a Convective SIGMET when the following conditions are occurring or, in the judgment of the forecaster, are expected to occur.

- A line of thunderstorms at least 60 miles long with thunderstorms affecting at least 40 percent of its length.
- An area of active thunderstorms judged to have a significant impact on the safety of aircraft operations covering at least 40 percent of the area concerned and exhibiting a very strong radar reflectivity intensity or a significant satellite or lightning signature.

- Embedded or severe thunderstorm(s) expected to occur for more than 30 minutes during the valid period regardless of the size of the area.

6.2.2 Special Issuance Criteria

A special Convective SIGMET may be issued when any of the following criteria are occurring or, in the judgment of the forecaster, are expected to occur for more than 30 minutes of the valid period.

- Tornado, hail greater than or equal to 3/4 inch, or wind gusts greater than or equal to 50 knots are reported.
- Indications of rapidly changing conditions, if in the forecaster's judgment, they are not sufficiently described in existing Convective SIGMETs.
- Special issuance is not required for a valid Convective SIGMET.

6.2.3 Issuance Time and Valid Period

The Convective SIGMET issuance time and valid period are as follows:

- Three (3) Convective SIGMET bulletins for the eastern, central, and western regions of the CONUS will be issued hourly on a scheduled basis.
- Convective SIGMETs are valid for 2 hours or until superseded by the next hourly issuance.
- A SIGMET bulletin will be transmitted each hour for each region. When conditions do not meet or are not expected to meet Convective SIGMET criteria within a region at the scheduled time of issuance, a "CONVECTIVE SIGMET . . . NONE" message is transmitted.

6.2.4 Convective SIGMET Format

Each plain text Convective SIGMET bulletin will include one or more individually numbered Convective SIGMETs for the region. See examples in Appendix A. The content and order of each bulletin will be as follows:

1. CONVECTIVE SIGMET, series number, and region letter (E, W, or C)
2. Valid ending time (UTC)
3. List of states affected by the phenomena
4. Location of phenomena delineated by high-altitude VOR coordinates covering the affected area during the SIGMET valid time
5. Phenomena description (e.g., AREA SEV EMBD TS)
6. Movement (e.g., MOV FROM 26030KT)
7. Cloud top (e.g., TOPS ABV FL450)
8. Remarks (e.g., TORNADOES . . . HAIL TO 2.5 IN . . . WIND GUSTS TO 70KT POSS). Tropical Cyclone information will be added to remarks section when appropriate.

XML Convective SIGMET products will be provided according to the published schema for that product. The exact schema used can be found in the header near the beginning of the product.

6.2.5 Convective SIGMET Outlook

Each region will include a 2- to 6-hour Convective SIGMET outlook at the end of the bulletin.

The content and order of each bulletin will be as follows. See examples in Appendix A.

1. Beginning and ending valid times
2. Location of expected Convective SIGMET issuances delineated by high-altitude VOR coordinates for the outlook valid time.

6.2.6 Convective SIGMET Cancellations

Convective SIGMETs are not canceled but are superseded by the next SIGMET in the series.

6.2.7 Convective SIGMET Amendments

Amended Convective SIGMETs will NOT be issued. Instead, a new Convective SIGMET will be issued for that region.

6.2.8 Convective SIGMET Corrections

Corrections to Convective SIGMETs will be issued as necessary.

NOTE: The FAA uses a time matching system to determine the most recent products. Therefore, corrections will carry the CURRENT time of the SIGMET to ensure the SIGMET is updated in the FAA system.

6.3 International, Alaska, and Hawaii SIGMET Description

6.3.1 Issuance Criteria

International SIGMETs and SIGMETs issued by Alaska and Hawaii (referred to in total as International SIGMETs hence-forward in this directive) are not separated into convective and non-convective products, as with AWC SIGMETs issued for the domestic FIRs. Tropical Cyclone information is contained within the body of the product, not within remarks. NWS offices will issue International SIGMETs when any of the following phenomena occur or are expected to occur in an area, which in the judgment of the forecaster, have the potential to have a significant impact on the safety of aircraft operations.

1. Thunderstorm - of type below*
 - a. Obscured OBSC TS
 - b. Embedded EMBD TS
 - c. Widespread WDSPR TS
 - d. Squall line SQL TS
 - e. Isolated severe ISOL SEV TS
2. Severe Turbulence SEV TURB
3. Severe Icing SEV ICE
 - a. With freezing rain SEV ICE (FZRA)
4. Dust storm WDSPR DS

- | | |
|---------------------|----------|
| 5. Sandstorm | WDSPR SS |
| 6. Volcanic Ash | VA |
| 7. Tropical Cyclone | TC |

*Tornado (TDO), Funnel Cloud (FC), Waterspout (WTSPT), and Heavy Hail (HVY GR) may be used as a further description of the thunderstorm as necessary.

6.3.1.1 International SIGMET for Volcanic Ash Cloud

A SIGMET for volcanic ash cloud will be issued for volcanic eruptions. A volcanic eruption is any volcanic activity that produces volcanic ash emissions, regardless of eruption magnitude. Offices preparing SIGMETs for volcanic ash should use the forecast position information available from advisories provided by the pertinent Volcanic Ash Advisory Center (VAAC). Initial Volcanic Ash Eruption SIGMETs may be issued based on credible pilot reports in the absence of a Volcanic Ash Advisory (VAA), but should be updated once a VAA is issued.

Volcanic ash SIGMETs will continue to be issued until the ash cloud is no longer occurring or expected to occur over the area of responsibility.

SIGMETs for volcanic ash cloud will be valid for up to six (6) hours and provide an observed or forecast location of the ash cloud at the beginning of the SIGMET. A forecast position for the ash cloud, valid at the end of the valid period of the SIGMET message, will also be included. SIGMETs will be reissued at least every six (6) hours consistent with forecast guidance provided in the VAA by the VAAC, or until the VAAC determines that the hazard no longer exists.

6.3.1.2 International SIGMET for Tropical Cyclone

A SIGMET for a tropical cyclone will be issued for non-frontal, synoptic-scale cyclones meeting the following criteria.

1. Originates over tropical or subtropical waters with organized convection and definite cyclonic surface wind circulation.
2. Wind speeds reach 35 knots independent of the wind averaging time used by the Tropical Cyclone Advisory Center (TCAC).

MWOs preparing SIGMETs for tropical cyclones will use the Tropical Cyclone Advisory (FK bulletins) issued by the appropriate TCAC (Miami, Honolulu, or Tokyo) for forecast information.

SIGMETs for tropical cyclones will be valid for up to six (6) hours. SIGMETs for tropical cyclones will include two positions. The first position included will be the TCAC advisory position. The second position will be the forecast position valid at the end of the SIGMET period.

In addition to the two storm positions, SIGMETs will include associated convection when applicable. SIGMETs will be reissued at least every six (6) hours while the tropical cyclone wind remains or is expected to remain at or greater than 35 knots.

6.3.2 Format

Plain text international SIGMETs will contain the following information, related to the specific phenomena and in the order indicated. See examples in Appendix A.

1. Phenomenon and its description from Section 6 (e.g., SEV TURB).
2. An indication the information is observed, using OBS and/or FCST. The time of observation will be given in UTC.
3. Location of the phenomenon described by using latitude and longitude, or VORs, and flight levels (altitude) covering the affected area during the SIGMET valid time. SIGMETs for tropical cyclones will contain the positions of the tropical cyclone center and radius of convection at the start of the valid time of the SIGMET.
4. Movement towards or expected movement using sixteen points of the compass, with speed in knots, or stationary, if appropriate.
5. Thunderstorm maximum height as FL.
6. Changes in intensity; using as appropriate, the abbreviations INTSF (Intensifying), WKN (Weakening), or NC (No Change). Intensity change included on VA SIGMETs
7. Forecast position of the center of the tropical cyclone at the end of the valid period of the SIGMET message.

XML international SIGMET products will be provided according to the published schema for that product. The exact schema used can be found in the header near the beginning of the product.

6.3.3 International SIGMET Cancellations

A SIGMET will be canceled when the phenomena is no longer occurring or expected to occur in the area or responsibility.

6.3.4 International SIGMET Amendments

SIGMET amendments will NOT be issued. Instead, the next SIGMET in the series is issued to accomplish the update. The valid time of the new SIGMET is reset to reflect the new four-hour valid period (six-hour for VA and TC SIGMETs).

6.3.5 International SIGMET Corrections

Corrections to SIGMETs will be issued as necessary by issuing a new SIGMET in the series which advances the SIGMET number and supersedes the previous SIGMET.

NOTE: The FAA uses a time matching system to determine the most recent products. Therefore, corrections will carry the CURRENT time to ensure that the SIGMET is updated in the FAA system.

6.3.6 Interchange of SIGMETs between Adjacent U.S. Offices

The originating office will cancel an existing SIGMET when hazardous weather covered by the SIGMET moves from one office's area of responsibility to the adjacent office's area of responsibility. The adjacent MWO will issue a new SIGMET under a new SIGMET series

identifier.

6.3.7 Continuous SIGMET Criteria across Adjacent Boundaries

When an area of continuous hazardous weather meeting SIGMET criteria extends from one area of responsibility into another, the two offices will determine whether to issue two separate SIGMETs or have one office issue a single SIGMET for the hazardous weather in both areas.

6.3.8 SIGMET Naming Convention for the Meteorological Watch Offices (MWOs).

To avoid duplication of valid SIGMET series, the MWOs have adopted a series naming convention where each uses a different portion of the ICAO Phonetic Alphabet*.

- AWC: ALFA, BRAVO, CHARLIE, DELTA, ECHO, FOXTROT, GOLF, and HOTEL (Pacific) . ALFA, BRAVO, CHARLIE, DELTA, ECHO, FOXTROT, GOLF, HOTEL, INDIA, JULIETT, KILO, LIMA, AND MIKE (Atlantic) .
- AAWU: INDIA, JULIETT, KILO, LIMA, and MIKE
- WFO Honolulu: NOVEMBER, OSCAR, PAPA, QUEBEC, ROMEO, SIERRA, TANGO, UNIFORM, VICTOR, WHISKEY, XRAY, YANKEE, and ZULU

* If the number of active SIGMETs exceeds the names assigned, the MWO will use the following SIGMET naming procedures:

- AWC: The AWC will cycle through the alpha names listed above. If all eight SIGMET alpha names are in use by the AWC, they will coordinate with the AAWU to temporarily use INDIA, JULIETT, KILO, LIMA, or MIKE. When the temporary need for the letter has ended, AWC will coordinate with AAWU to release the letter.
- AAWU: The AAWU will cycle through the alpha names listed above. If all five SIGMET alpha names are in use by the AAWU, they will coordinate with WFO Honolulu to temporarily use NOVEMBER, OSCAR, PAPA, or QUEBEC. If the AWC is using the ALFA name and the AAWU needs to issue another SIGMET, they will skip the ALFA name the AWC is using and issue the next available name in the series. When the temporary need for the letter has ended, AAWU will coordinate with WFO Honolulu to release the letter.
- WFO Honolulu: WFO Honolulu will cycle through the alpha names listed above. If the AAWU is using an alpha name and WFO Honolulu needs to issue another SIGMET, they will skip the alpha name the AAWU is using and issue the next available name in the series.

7 Airmen's Meteorological Information (AIRMET) and Graphical AIRMET (G-AIRMET)

An AIRMET is a concise textual description of the occurrence or expected occurrence of specified en route weather phenomena which may affect the safety of aircraft operations, but at intensities lower than those which require the issuance of a SIGMET. AIRMETs are intended to inform all pilots, but especially Visual Flight Rules pilots and operators of sensitive aircraft, of potentially hazardous weather phenomena. Freezing level information is included.

The G-AIRMET, a graphical version of the AIRMET, is issued for the same criteria as AIRMETs but are more temporally and spatially precise. G-AIRMETs are valid at discrete times 3 hours apart for a period of 12 hours into the future (0-, 3-, 6-, 9- and 12-hour forecasts).

Currently all the MWOs issue text AIRMETs, but only the AWC issues G-AIRMETs.

7.1 AIRMET/G-AIRMET Criteria

An AIRMET/G-AIRMET will be issued when any of the following weather phenomena is affecting or, in the judgment of the forecaster, is expected to affect an area having a significant impact on the safety of aircraft operations.

1. Ceiling less than 1,000 feet and/or visibility less than 3 SM (IFR).
2. Weather phenomena restricting visibility including, but not limited to, precipitation (PCPN), smoke (FU), haze (HZ), mist (BR), fog (FG), and blowing snow (BLSN).
3. Widespread mountain obscuration (MTN OBSC).
4. Weather phenomena causing the obscuration can include, and are limited to, clouds (CLDS), precipitation (PCPN), smoke (FU), haze (HZ), mist (BR), and fog (FG).
5. Moderate turbulence (MOD TURB).
6. Top and bottom of MOD TURB layer are included.
7. Sustained surface wind greater than 30 knots (STG SFC WND).
8. Moderate icing (MOD ICE).
9. Top and bottom of MOD ICE are included.
10. Multiple freezing level (FRZLVL) altitudes may be given; the lowest level is the declared FRZLVL.
11. Areas with multiple freezing levels are included.
12. Range of freezing levels over the area is included.
13. Lowest freezing levels above ground level (AGL) at intervals of 500 feet AMSL (or SFC as appropriate) are included.
14. Non-convective low-level wind shear potential below 2,000 feet AGL (LLWS POTENTIAL).

7.2 AIRMET/G-AIRMET Issuance Times and Valid Period

1. AIRMETs/G-AIRMETs will be issued with one or more AIRMET messages on the following schedule. Unscheduled AIRMETs/G-AIRMETs are issued as needed when an amendment or correction is required.
 - a. CONUS: G-AIRMETs will be issued on a scheduled basis every six (6) hours around 0245, 0845, 1445, and 2045 UTC.
 - b. Hawaii: AIRMET bulletins will be issued on a scheduled basis every six (6) hours at 0345, 0945, 1545, and 2145 UTC.

- c. Alaska: AIRMET bulletins will be issued on a scheduled basis every eight (8) hours at ~~at~~ 0415, 1215, and 2015 local Alaska Time or 0515, 1315, and 2115 UTC during standard time, and 0415, 1215, and 2015 UTC during daylight saving time.
2. AIRMETs/G-AIRMETs will be valid for no more than six (6) hours in CONUS and Hawaii and no more than eight (8) hours in Alaska. The valid period of an AIRMET message will not exceed the valid time of the AIRMET bulletin.

7.3 AIRMET/G-AIRMET Format

The text AIRMET messages will include the following information as appropriate and in the order indicated. See examples in Appendix A.

1. Reference to appropriate active SIGMETs affecting the area of concern at the time of AIRMET issuance (e.g., SEE SIGMET BRAVO SERIES).
2. Beginning time of the AIRMET phenomenon is different from the AIRMET beginning valid time.
3. AIRMET name (SIERRA, TANGO, or ZULU), update number, weather phenomenon, and ending valid time. (Note: the AIRMET number is reset to zero (0) after 0000 UTC each day. The update numbering begins with any update, either regularly scheduled or amendment, after the issuance of the first regularly scheduled AIRMET of the UTC day. Corrections carry the same update number as the previous issuance being corrected.)
4. Location of phenomenon using VORs or other well-known geographic features. The AAWU may also use VORs or geographic location.
5. Description of phenomenon for the AIRMET issuance.
6. Vertical extent (bases and tops), as appropriate.
7. Ending time of phenomenon if different from the AIRMET ending time.
8. Alaska AIRMETs. Intensity change remarks (INTSF, WKN, or NC) concerning the continuance of the phenomenon following the 6-hour valid period.
9. Hawaii AIRMETs: A separate AIRMET outlook will be included in the AIRMET bulletin when conditions meeting criteria are expected to occur during the 6-hour period after the valid time of the AIRMET bulletin.
10. Alaska AIRMETs: Outlook information will be included in the appropriate FA zone during the 6-hour period after the valid time of the AIRMET bulletin.

The G-AIRMET product is issued in two different formats: World Meteorological Organization (WMO) Binary Universal Form for the Representation of meteorological data (BUFR), as well as XML. The XML products will become the primary format as the FAA retires the CONUS AIRMET. G-AIRMET are formatted according to a published schema. A reference to the exact schema version used can be found in the header near the beginning of the product as well as in Appendix E.

7.4 AIRMET/G-AIRMET Updates and Amendments

If an AIRMET/G-AIRMET is amended, the plain text AIRMET product will contain AAA at the end of WMO heading line for the first amendment, AAB for the second, and continuing for all subsequent amendments. Additionally, AMD will be added after the date/time group on the FAA product line. The update number will be incremented (see 7.3 Item 3). The G-AIRMET XML product will contain appropriate attributes to indicate the amendment. The issuance times of the AIRMET/G-AIRMET products will be updated to reflect the time of the amendment. The ending valid times remain unchanged.

7.5 AIRMET/G-AIRMET Corrections

AIRMETs/G-AIRMETs containing errors will be corrected. For plain text AIRMET products, CCA will be added after the date/time group on the WMO heading line for the first correction, CCB for the second, and continuing for all subsequent corrections. COR will be added after the date/time group on the FAA product line. The G-AIRMET XML product will contain appropriate attributes to indicate the correction. The issuance times of the AIRMET/G-AIRMET products will be updated to reflect the time of the correction. The ending valid times remain unchanged.

NOTE: The FAA uses a time matching system to determine the most recent products. Therefore, amendments and corrections will carry the CURRENT time to ensure that the AIRMET is updated in the FAA system.

8 Traffic Flow Management (TFM) Convective Forecast (TCF)

The TCF is a high confidence (greater than 50%) graphical representation of forecasted convection meeting specific coverage, intensity, and echo top criteria. The TCF is designed for use in the coordinated planning and strategic management of en route air traffic flow. The TCF is used by airline industry and FAA participants of the Collaborative Decision Making (CDM) NAS planning process led by the Federal Aviation Administration's Air Traffic Control System Command Center. From approximately March 1 through October 31, the TCF is issued by AWC after collaboration with NWS offices, Meteorological Service of Canada, meteorological offices of airlines, and service providers. Automated routines make the TCF available as a non-collaborated product from November through February. Lines of convection are not depicted when automated routines produce the TCF.

8.1 TCF Criteria

All of the following conditions will be met for an area of convection to be identified and included in the TCF.

1. The area will contain at least 25% coverage of:
 - a. 40 dBZ or higher composite radar reflectivity echoes, and
 - b. Echo tops at or above FL250
2. Forecaster confidence (of the above conditions occurring) of at least 50%.

8.2 TCF Format

1. Coverage
 - a. Sparse 25–39% (sparse fill)
 - b. Medium 40–74% (medium fill)

- c. Lines of coverage: Solid purple lines, either alone or within a polygon. The length of a line will be at least 100 nm and coverage of 75–100%.
- 2. Maximum echo tops range:
 - a. 25,000–29,000 feet MSL (290)
 - b. 30,000–34,000 feet MSL (340)
 - c. 35,000–39,000 feet MSL (390)
 - d. At or above 40,000 feet MSL (400)
- 3. Forecaster confidence:
 - a. High: 50–100% (blue border and fill)

8.3 TCF Issuance Times and Valid Period

- 1. The TCF is issued daily every 2 hours, valid at 4-, 6-, and 8-hours after issuance time.
- 2. A portion of Canadian airspace is included approximately April 1 through September 30.
- 3. The TCF ASCII coded text product is issued under these WMO headers:
 - a. 4-Hour: FAUS28 KKCI
 - b. 6-Hour: FAUS29 KKCI
 - c. 8-Hour: FAUS30 KKCI

8.4 TCF Updates, Amendments, and Corrections

The TCF is updated every 2 hours and is not required to be amended or corrected.

NWSI 10-811 SEPTEMBER 2, 2025

APPENDIX A – Examples

A1	SIGMET.....	A-1
A1.1	Plain text CONUS Non-Convective SIGMET.....	A-1
A1.2	Plain text CONUS Convective SIGMET.....	A-1
A1.3	Plain text Convective SIGMET with tropical cyclone remarks	A-2
A1.4	Plain text International SIGMET.....	A-2
A1.5	Plain text International Tropical Cyclone SIGMET.....	A-2
A1.6	Plain text International Volcanic Ash Cloud SIGMET.....	A-2
A2	AIRMET.....	A-2
A2.1	Plain text Hawaii AIRMET.....	A-2
A2.2	Plain text Alaska AIRMET.....	A-3
A3	Alaska FA.....	A-3
A4	TCF.....	A-5

A1 SIGMET

A1.1 Plain text CONUS Non-Convective SIGMET

WSUS01 KNCI 050600
WS1R
BOSR WS 050600
SIGMET ROMEO 2 VALID UNTIL 051000 ME NH VT
FROM CAR TO YSJ TO CON TO MPV TO CAR
SEV TURB BLW 080. RPRTD BY ACFT. CONDS CONTG BYD 1000Z.

A1.2 Plain text CONUS Convective SIGMET

WSUS33 KNCI 091855
SIGW
MKCW WST 091855
CONVECTIVE SIGMET...NONE
.
OUTLOOK VALID 092055-100055
TS ARE NOT EXPD.

WSUS32 KNCI 091855
SIGC
MKCC WST 091855
CONVECTIVE SIGMET 21C
VALID UNTIL 2055Z
AR OK
FROM 20S RZC-40SSW FSM
DMSHG LINE TS 25 NM WIDE MOV FM 27025KT. TOPS TO FL320.
.
OUTLOOK VALID 092055-100055
FROM 40NE BUM-60SE SGF-50WSW LIT-40W GGG-60ENE ABI-ADM-50WNW BUM-40NE
BUM
WST ISSUANCES EXPD. REFER TO MOST RECENT ACUS01 KWNS FROM STORM
PREDICTION CENTER FOR SYNOPSIS AND METEOROLOGICAL DETAILS.

A1.3 Plain text Convective SIGMET with tropical cyclone remarks

WSUS31 KPCI 211355
SIGE
MKCE WST 211355
CONVECTIVE SIGMET 1E
VALID UNTIL 1555Z
NC SC FL GA AND CSTL WTRS
FROM 30SSE CLT-160SE ILM-140ENE OMN-60E TLH-ABY-30SSE CLT AREA SEV
EMBD TS MOV FROM 21015KT. TOPS ABV FL450.
TORNADOES...WIND GUSTS TO 60KT POSS.
TS ASSOCD WITH TROPICAL STORM ALBERTO.
.
OUTLOOK VALID 211555-211955
FROM 30E RDU-180SE ECG-140SSE ILM-180E PBI-40SE PBI-40S EYW-90SW EYW-
70W SRQ-50N CTY-40N MCN-30NW SPA-30E RDU REF WW 475.
WST ISSUANCES EXPD. REFER TO MOST RECENT ACUS01 KWNS FROM STORM
PREDICTION CENTER FOR SYNOPSIS AND METEOROLOGICAL DETAILS. REFER TO
MOST RECENT WTNT21 KNHC FROM NATIONAL HURRICANE CENTER FOR DETAILS ON
TROPICAL STORM ALBERTO.

A1.4 Plain text International SIGMET

WSPA07 PHFO 010358
SIGPAT
KZAK SIGMET TANGO 1 VALID 010400/010800 PHFO-
OAKLAND OCEANIC FIR EMBD TS OBS WI N2055 W15000 - N1950 W14945 - N1922
W15130 - N2027 W15048 - N2055 W15000. TOP FL400. MOV W 10KT. WKN.

A1.5 Plain text International Tropical Cyclone SIGMET

WSNT03 KPCI 081451 SIGA0C
KZNY SIGMET CHARLIE 11 VALID 081500/082100 KPCI-
NEW YORK OCEANIC FIR TC KYLE OBS N3106 W07118 AT 1500Z TOP FL500 WI
120NM OF CENTER MOV WSW 5 KT NC FCST 2100Z TC CENTER N3142 W07012

A1.6 Plain text International Volcanic Ash Cloud SIGMET

WVAK01 PAWU 300600
PAZA SIGMET INDIA 1 VALID 300600/301200 PAWU-
ANCHORAGE FIR VA ERUPTION PAVLOF VOLCANO PSN N5542 W16153
VA CLDS OBS AT 0600Z WI N5734 W16036 - N5609 W16027 - N5612 W15838 -
N5530 W15838 - N5516 W16256 - N5719 W16406 - N5734 W16036 SFC/FL300.
MOV E 5KT. NC. FCST 1200Z VA CLD WI N5616 W15836 - N5624 W15322 -
N5519 W15332 - N5528 W15835 - N5616 W15836.

A2 AIRMET

A2.1 Plain text Hawaii AIRMET

WAHW31 PHFO 090945
WA0HI

HNLT WA 091000
AIRMET TANGO UPDATE 1 FOR TURB VALID UNTIL 091600

AIRMET TURB...KAUAI OAHU MOLOKAI LANAI MAUI
OVR AND IMT S THRU W OF MTN.
TEMPO MOD TURB BLW 100. COND CONT BYD 1600Z.

A2.2 Plain text Alaska AIRMET

WAAK47 PAWU 011740
WA7O
JNUS WA 011745
AIRMET SIERRA FOR IFR AND MT OBSC VALID UNTIL 012100
.
LYNN CANAL AND GLACIER BAY JB
PAGS W SPRDG E MTS OCNL OBSC IN CLDS/PCPN. DTRT.
.
CNTRL SE AK JC
N PAGN OCNL CIGS BLW 010/VIS BLW 3SM -RA BR. IMPR.
.
CNTRL SE AK JC
MTS OCNL OBSC IN CLDS/PCPN. NC.
.
ERN GLF CST JE
MTS OCNL OBSC IN CLDS/PCPN. IMPR.
.
SE AK CSTL WTRS JF AAA
OCNL CIG BLW 010 VIS BLW 3SM BR. ST/FOG TOPS 015. NC.

A3 Alaska FA


FAAK48 PAWU 291739
FA8H
ANCH FA 291315
AK SRN HLF EXCP SE AK...
.
AIRMETS VALID UNTIL 292115
CB IMPLY POSSIBLE SEV OR GREATER TURB SEV ICE LLWS AND IFR CONDS.
NON MSL HEIGHTS NOTED BY AGL OR CIG.
.
SYNOPSIS VALID UNTIL 300700
998MB LOW 140NM SE PAKH MOV SE THRU PD. ASSOC SFC TROF SERN KODIAK
ISLAND-SEWD ALSO MOV SE THRU PD. OCFNT WRN/CNTRL BERING SEA-PAAK MOV
E TO LIE NR A ST MATTHEW ISLAND-PAPB-SEGUAM LN BY 18Z AND A PASA-
PACZ-PADU LN BY END OF PD.
.
COOK INLET AND SUSITNA VLY AB...VALID UNTIL 300100
...CLOUDS/WX...
AIRMET IFRTIL 19Z N PANC OCNL CIG BLW 010/VIS BLW 3SM -SHSN BR.
IMPR...
AIRMET MT OBSCN PANC MTS OBSC IN CLDS/PCPN. IMPR...

N PANC SCT005 BKN025 OVC045 TOP 120 LYRD TO FL250 VIS 5SM -SN.
 AFT 21Z ISOL -SN.
 ELSW BKN050 BKN120 CI ABV.
 OTLK VALID 300100-300700...TALKEETNA MTS MVFR CIG. ELSW VFR.
 PASSES...LAKE CLARK...MERRILL...RAINY...VFR.
 WINDY...IFR CIG/VIS SHSN. AFT 21Z MVFR CIG.
 PORTAGE...MVFR CIG.
 ...TURB...
 NIL SIG.
 ...ICE AND FZLVL...
 AIRMET ICETIL 16Z N PAUO OCNL MOD ICEIC 020-120.
 FZLVL SFC. WKN...
 16Z TO 19Z N PATK ISOL MOD ICEIC 020-120.
 .
 COPPER RIVER BASIN AC...VALID UNTIL 300100
 ...CLOUDS/WX...
 AIRMET IFRVLYS OCNL CIGS BLW 010/VIS BLW 3SM BR. IMPR...
 AIRMET MT OBSCMTS OCNL OBSC IN CLDS/PCPN. NC...
 FEW015 SCT045 BKN070 TOP 120. VCY MTS OCNL BKN045 ISOL -SHSN.
 OTLK VALID 300100-300700...VFR.
 PASS...TAHNETA...IFR VIS BR.
 ...TURB...
 NIL SIG.
 ...ICE AND FZLVL...
 AFT 19Z NE PAGK ISOL MOD ICEIC 020-120. FZLVL SFC.
 .
 CNTRL GLF CST AD...VALID UNTIL 300100
 ...CLOUDS/WX...
 AIRMET MT OBSCMTS OCNL OBSC IN CLDS/PCPN. IMPR...
 FEW005 SCT025 BKN045 TOP 110. OCNL BKN025 VIS 5SM -SHSN/SHRASN BR.
 CHUGACH MTS ISOL CIGS BLW 010/VIS BLW 3SM -SHSN BR.
 OTLK VALID 300100-300700...CHUGACH MTS MVFR CIG SHSN/SHRA. ELSW VFR.
 ...TURB...
 NIL SIG.
 ...ICE AND FZLVL...
 NIL SIG. FZLVL BLW 010.
 .
 KODIAK IS AE...VALID UNTIL 300100
 ...CLOUDS/WX...
 TIL 18Z OFSHR SE PAKH BKN-OVC025 LYRD TO FL200. OCNL -SHRA/-SHRASN BR.
 ELSW/OTRW SCT035 BKN050 TOPS 090 ISOL -SHSN.
 OTLK VALID 300100-300700...VFR.
 ...TURB...
 NIL SIG.
 ...ICE AND FZLVL...
 NIL SIG. FZLVL SFC N TO 020 S.

A5 TCF

FAUS28 KKCI 301700

CFP02
CCFP 20130430_1700 20130430_2100
AREA 3 3 3 3 0 0 5 326 773 299 792 301 775 326 764 326 773 312 777
AREA 3 3 3 3 0 0 19 282 897 285 889 293 884 298 883 303 875 312 869
321 872 324 886 325 904 319 924 315 935 315 953 307 954 300 947 301
938 297 929 291 920 282 923 282 897 292
916
AREA 3 1 3 2 0 0 16 282 912 287 902 294 898 297 908 306 911 317 910
320 898 320 886 320 876 314 872 302 878 302 888 293 887 287 892 282
902 282 912 265 897
AREA 3 1 3 2 0 0 7 288 817 283 824 264 816 254 805 264 802 286 811 288
817 272 812
AREA 3 3 3 2 0 0 13 297 819 281 828 269 824 259 814 252 811 252 804
263 800 268 795 275 795 278 805 286 807 296 814 297 819 290 818
CANADA ON

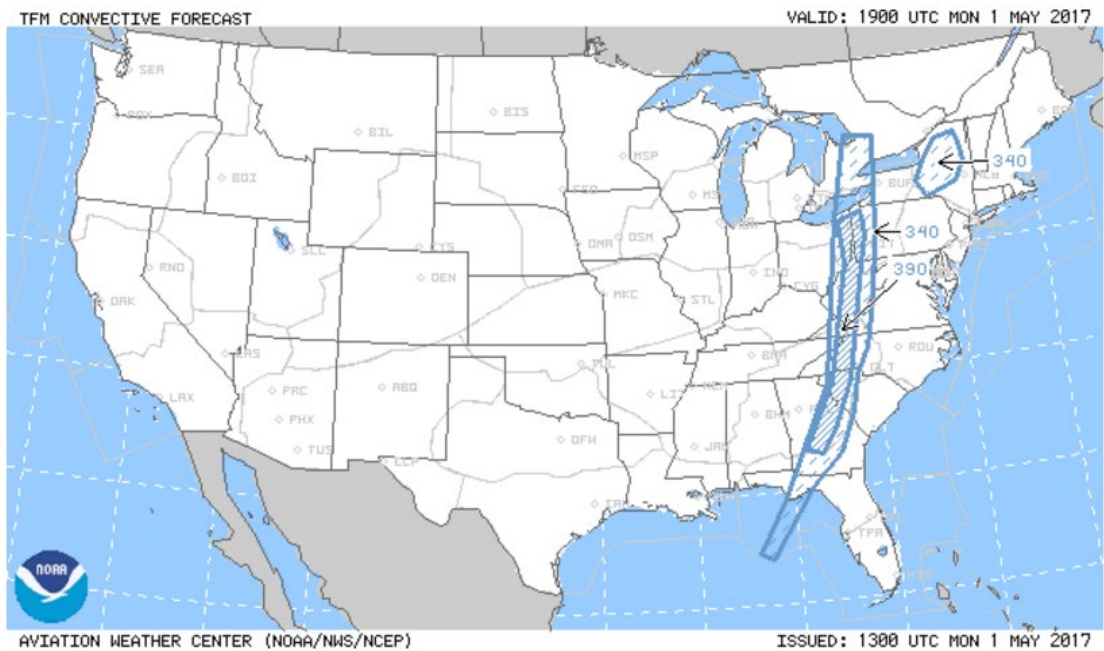

APPENDIX B - WMO Headers

B1	Aviation Weather Center (AWC) Products.....	B-1
B1.1	SIGMET.....	B-1
	B1.1.1 CONUS FIRs Non-Convective SIGMET.....	B-1
	B1.1.2 CONUS FIRs Convective SIGMET.....	B-2
	B1.1.3 New York, Miami, Houston, and San Juan Oceanic FIRs.....	B-2
	B1.1.4 Oakland Oceanic FIR.....	B-2
B1.2	AIRMET/G-AIRMET.....	B-4
B1.3	TCF.....	B-4
B2	Alaska Aviation Weather Unit (AAWU) Products.....	B-4
B2.1	SIGMET.....	B-4
B2.2	AIRMET.....	B-4
B2.3	FA.....	B-5
B2.4	VAA.....	B-5
B2.5	VAG. (VAA graphic)	B-5
B3	WFO Honolulu Products.....	B-5
B3.1	SIGMET.....	B-5
B3.2	AIRMET.....	B-6

B1 Aviation Weather Center (AWC) Products**B1.1 SIGMET****B1.1.1 CONUS FIRs Non-Convective SIGMET**

<u>WMO Header</u>	<u>AWIPS ID</u>
WCUS01 KKCI	MKCWC1 [N-Y] *
WSUS01 KKCI	MKCWS1 [N-Y] *
WVUS01 KKCI	MKCWV1 [N-Y] *
WCUS02 KKCI	MKCWC2 [N-Y] *
WSUS02 KKCI	MKCWS2 [N-Y] *
WVUS02 KKCI	MKCWV2 [N-Y] *
WCUS03 KKCI	MKCWC3 [N-Y] *
WSUS03 KKCI	MKCWS3 [N-Y] *
WVUS03 KKCI	MKCWV3 [N-Y] *
WCUS04 KKCI	MKCWC4 [N-Y] *
WSUS04 KKCI	MKCWS4 [N-Y] *
WVUS04 KKCI	MKCWV4 [N-Y] *
WCUS05 KKCI	MKCWC5 [N-Y] *
WSUS05 KKCI	MKCWS5 [N-Y] *
WVUS05 KKCI	MKCWV5 [N-Y] *
WCUS06 KKCI	MKCWC6 [N-Y] *
WSUS06 KKCI	MKCWS6 [N-Y] *

WVUS06 KKCI MKCWV6 (N-Y) *

*Omit Sierra (S), Tango (T), and Zulu (Z)

B1.1.2 CONUS FIRs Convective SIGMET

<u>WMO Header</u>	<u>AWIPS ID</u>
WSUS31 KKCI	MKCSIGE
WSUS32 KKCI	MKCSIGC
WSUS33 KKCI	MKCSIGW

B1.1.3 New York, Miami, Houston, and San Juan Oceanic FIRs

<u>WMO Header</u>	<u>AWIPS ID</u>
WSNT01 KKCI	SIGA0A
WSNT02 KKCI	SIGA0B
WSNT03 KKCI	SIGA0C
WSNT04 KKCI	SIGA0D
WSNT05 KKCI	SIGA0E
WSNT06 KKCI	SIGA0F
WSNT07 KKCI	SIGA0G
WSNT08 KKCI	SIGA0H
WSNT09 KKCI	SIGA0I
WSNT10 KKCI	SIGA0J
WSNT11 KKCI	SIGA0K
WSNT12 KKCI	SIGA0L
WSNT13 KKCI	SIGA0M
WCNT01 KKCI	MKCWSTA0A
WCNT02 KKCI	MKCWSTA0B
WCNT03 KKCI	MKCWSTA0C
WCNT04 KKCI	MKCWSTA0D
WCNT05 KKCI	MKCWSTA0E
WCNT06 KKCI	MKCWSTA0F
WCNT07 KKCI	MKCWSTA0G
WCNT08 KKCI	MKCWSTA0H
WCNT09 KKCI	MKCWSTA0I
WCNT10 KKCI	MKCWSTA0J
WCNT11 KKCI	MKCWSTA0K
WCNT12 KKCI	MKCWSTA0L
WCNT13 KKCI	MKCWSTA0M
WVNT01 KKCI	MKCWSVA0A
WVNT02 KKCI	MKCWSVA0B
WVNT03 KKCI	MKCWSVA0C
WVNT04 KKCI	MKCWSVA0D
WVNT05 KKCI	MKCWSVA0E
WVNT06 KKCI	MKCWSVA0F
WVNT07 KKCI	MKCWSVA0G
WVNT08 KKCI	MKCWSVA0H
WVNT09 KKCI	MKCWSVA0I
WVNT10 KKCI	MKCWSVA0J

WVNT11	KKCI	MKCWSVA0K
WVNT12	KKCI	MKCWSVA0L
WVNT13	KKCI	MKCWSVA0M

B1.1.4 Oakland Oceanic FIR

<u>WMO Header</u>	<u>AWIPS ID</u>
WSPN01 KKCI	MKCSIGP0A
WSPN02 KKCI	MKCSIGP0B
WSPN03 KKCI	MKCSIGP0C
WSPN04 KKCI	MKCSIGP0D
WSPN05 KKCI	MKCSIGP0E
WSPN06 KKCI	MKCSIGP0F
WSPN07 KKCI	MKCSIGP0G
WSPN08 KKCI	MKCSIGP0H
WSPN09 KKCI	MKCSIGP0I
WSPN10 KKCI	MKCSIGP0J
WSPN11 KKCI	MKCSIGP0K
WSPN12 KKCI	MKCSIGP0L
WSPN13 KKCI	MKCSIGP0M
WCPN01 KKCI	MKCWSTP0A
WCPN02 KKCI	MKCWSTP0B
WCPN03 KKCI	MKCWSTP0C
WCPN04 KKCI	MKCWSTP0D
WCPN05 KKCI	MKCWSTP0E
WCPN06 KKCI	MKCWSTP0F
WCPN07 KKCI	MKCWSTP0G
WCPN08 KKCI	MKCWSTP0H
WCPN09 KKCI	MKCWSTP0I
WCPN10 KKCI	MKCWSTP0J
WCPN11 KKCI	MKCWSTP0K
WCPN12 KKCI	MKCWSTP0L
WCPN13 KKCI	MKCWSTP0M
WVPN01 KKCI	MKCWSVP0A
WVPN02 KKCI	MKCWSVP0B
WVPN03 KKCI	MKCWSVP0C
WVPN04 KKCI	MKCWSVP0D
WVPN05 KKCI	MKCWSVP0E
WVPN06 KKCI	MKCWSVP0F
WVPN07 KKCI	MKCWSVP0G
WVPN08 KKCI	MKCWSVP0H
WVPN09 KKCI	MKCWSVP0I
WVPN10 KKCI	MKCWSVP0J
WVPN11 KKCI	MKCWSVP0K
WVPN12 KKCI	MKCWSVP0L
WVPN13 KKCI	MKCWSVP0M

B1.2 AIRMET/G-AIRMET

The AWC issues three XML G-AIRMETs (i.e., SIERRA, TANGO, and ZULU).

WMO HEADER

LWGE86 KKCI (SIERRA)
 LWHE00 KKCI (TANGO)
 LWIE00 KKCI (ZULU)

The AWC issues three BUFR G-AIRMETs (i.e., SIERRA, TANGO, and ZULU).

WMO HEADER

JUGE86 KKCI (SIERRA)
 JUHE00 KKCI (TANGO)
 JUIE00 KKCI (ZULU)

B1.3 TCFWMO HEADERAWIPS ID

FAUS28 KKCI	CFP02
FAUS29 KKCI	CFP03
FAUS30 KKCI	CFP04

B2 Alaska Aviation Weather Unit (AAWU) Products**B2.1 SIGMET**WMO HEADERAWIPS ID

WSAK01 PAWU	ANCSIGAK1
WSAK02 PAWU	ANCSIGAK2
WSAK03 PAWU	ANCSIGAK3
WSAK04 PAWU	ANCSIGAK4
WSAK05 PAWU	ANCSIGAK5
WSAK06 PAWU	ANCSIGAK6
WSAK07 PAWU	ANCSIGAK7
WSAK08 PAWU	ANCSIGAK8
WSAK09 PAWU	ANCSIGAK9

WVAK01 PAWU	ANCWSVAK1
WVAK02 PAWU	ANCWSVAK2
WVAK03 PAWU	ANCWSVAK3
WVAK04 PAWU	ANCWSVAK4
WVAK05 PAWU	ANCWSVAK5
WVAK06 PAWU	ANCWSVAK6
WVAK07 PAWU	ANCWSVAK7
WVAK08 PAWU	ANCWSVAK8
WVAK09 PAWU	ANCWSVAK9

B2.2 AIRMET

The AAWU issues three sets of three AIRMETs (i.e., SIERRA, TANGO, and ZULU).

<u>WMO HEADER</u>	<u>AWIPS ID</u>
WAAK47 PAWU	ANCWA7O
WAAK48 PAWU	ANCWA8O
WAAK49 PAWU	ANCWA9O

B2.3 FA

<u>WMO HEADER</u>	<u>AWIPS ID</u>
FAAK47 PAWU	ANCFA7H
FAAK57 PAWU	ANCFA7W
FAAK48 PAWU	ANCFA8H
FAAK58 PAWU	ANCFA8W
FAAK68 PAWU	ANCFA8T
FAAK49 PAWU	ANCFA9H
FAAK59 PAWU	ANCFA9W

B2.4 VAA

<u>WMO HEADER</u>	<u>AWIPS ID</u>
FVAK21 PAWU	ANCVAAAK1
FVAK22 PAWU	ANCVAAAK2
FVAK23 PAWU	ANCVAAAK3
FVAK24 PAWU	ANCVAAAK4
FVAK25 PAWU	ANCVAAAK5

B2.5 VAG (VAA graphic)

<u>WMO HEADER</u>	<u>AWIPS ID</u>
PFXD21 PAWU	not required
PFXD22 PAWU	not required
PFXD23 PAWU	not required
PFXD24 PAWU	not required
PFXD25 PAWU	not required

B3 WFO Honolulu Products**B3.1 SIGMET**

<u>WMO HEADER</u>	<u>AWIPS ID</u>
WSPA01 PHFO	HFOSIGPAN
WSPA02 PHFO	HFOSIGPAO
WSPA03 PHFO	HFOSIGPAP
WSPA04 PHFO	HFOSIGPAQ
WSPA05 PHFO	HFOSIGPAR

WSPA06	PHFO	HFOSIGPAS
WSPA07	PHFO	HFOSIGPAT
WSPA08	PHFO	HFOSIGPAU
WSPA09	PHFO	HFOSIGPAV
WSPA10	PHFO	HFOSIGPAW
WSPA11	PHFO	HFOSIGPAX
WSPA12	PHFO	HFOSIGPAY
WSPA13	PHFO	HFOSIGPAZ
WCPA01	PHFO	HFOWSTPAN
WCPA02	PHFO	HFOWSTPAO
WCPA03	PHFO	HFOWSTPAP
WCPA04	PHFO	HFOWSTPAQ
WCPA05	PHFO	HFOWSTPAR
WCPA06	PHFO	HFOWSTPAS
WCPA07	PHFO	HFOWSTPAT
WCPA08	PHFO	HFOWSTPAU
WCPA09	PHFO	HFOWSTPAV
WCPA10	PHFO	HFOWSTPAW
WCPA11	PHFO	HFOWSTPAX
WCPA12	PHFO	HFOWSTPAY
WCPA13	PHFO	HFOWSTPAZ
WVPA01	PHFO	HFOWSVPAN
WVPA02	PHFO	HFOWSVPAO
WVPA03	PHFO	HFOWSVPAP
WVPA04	PHFO	HFOWSVPAQ
WVPA05	PHFO	HFOWSVPAR
WVPA06	PHFO	HFOWSVPAS
WVPA07	PHFO	HFOWSVPAT
WVPA08	PHFO	HFOWSVPAU
WVPA09	PHFO	HFOWSVPAV
WVPA10	PHFO	HFOWSVPAW
WVPA11	PHFO	HFOWSVPAX
WVPA12	PHFO	HFOWSVPAY
WVPA13	PHFO	HFOWSVPAZ

B3.2 AIRMET

<u>WMO HEADER</u>	<u>AWIPS ID</u>
-------------------	-----------------


WAHW31 PHFO	WA0HI
-------------	-------

NOTE: Parsing is for geographical areas.


APPENDIX C - Areas of Responsibility

C1	AWC (KKCI) SIGMET area of responsibility in the Atlantic Basin.....	C-1
C2	SIGMET Areas of Responsibility in the Pacific Basin.....	C-2
C3	Convective SIGMETs Areas of Responsibility for the CONUS.....	C-3
C4	AAWU Flight Advisory and FA Reference Points	C-4

C1 AWC (KKCI) SIGMET area of responsibility in the Atlantic Basin

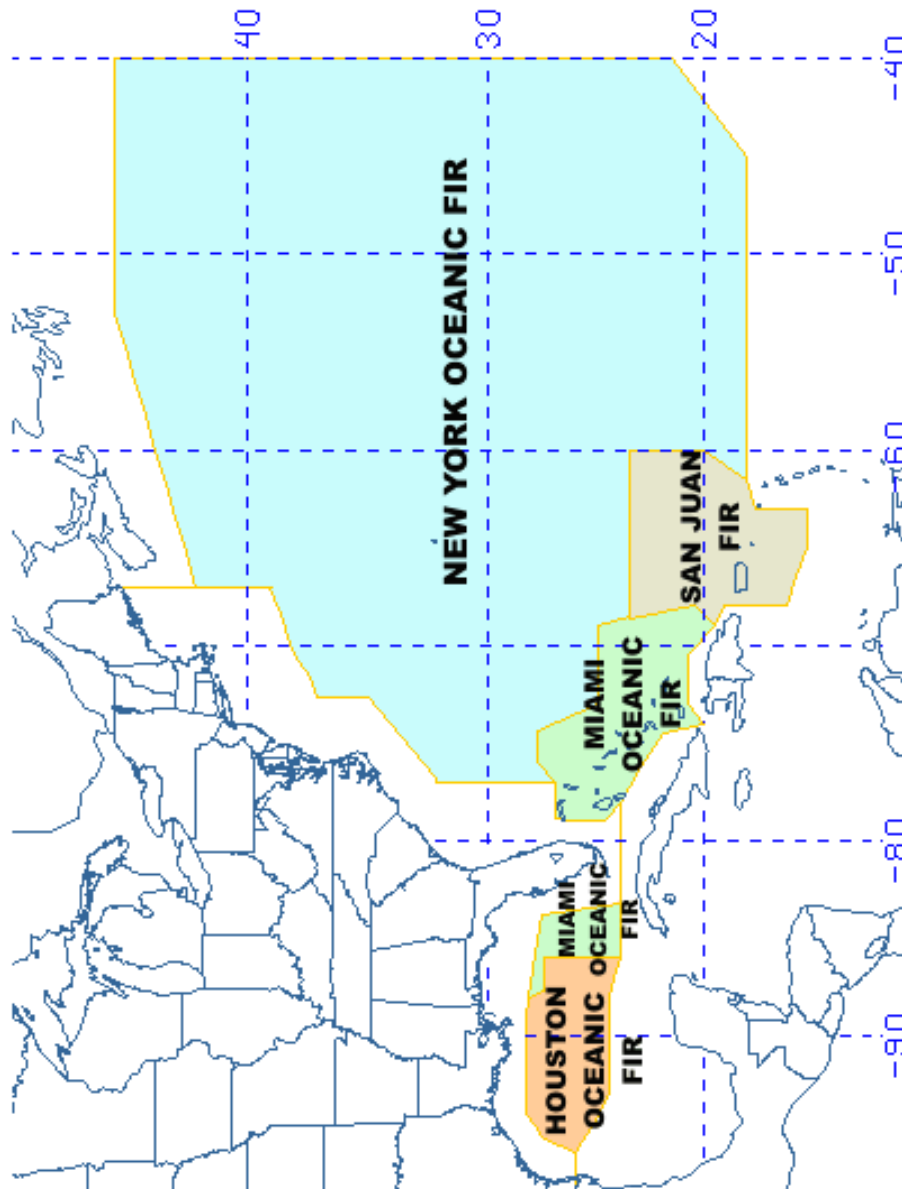


C2 SIGMET Areas of Responsibility in the Pacific Basin

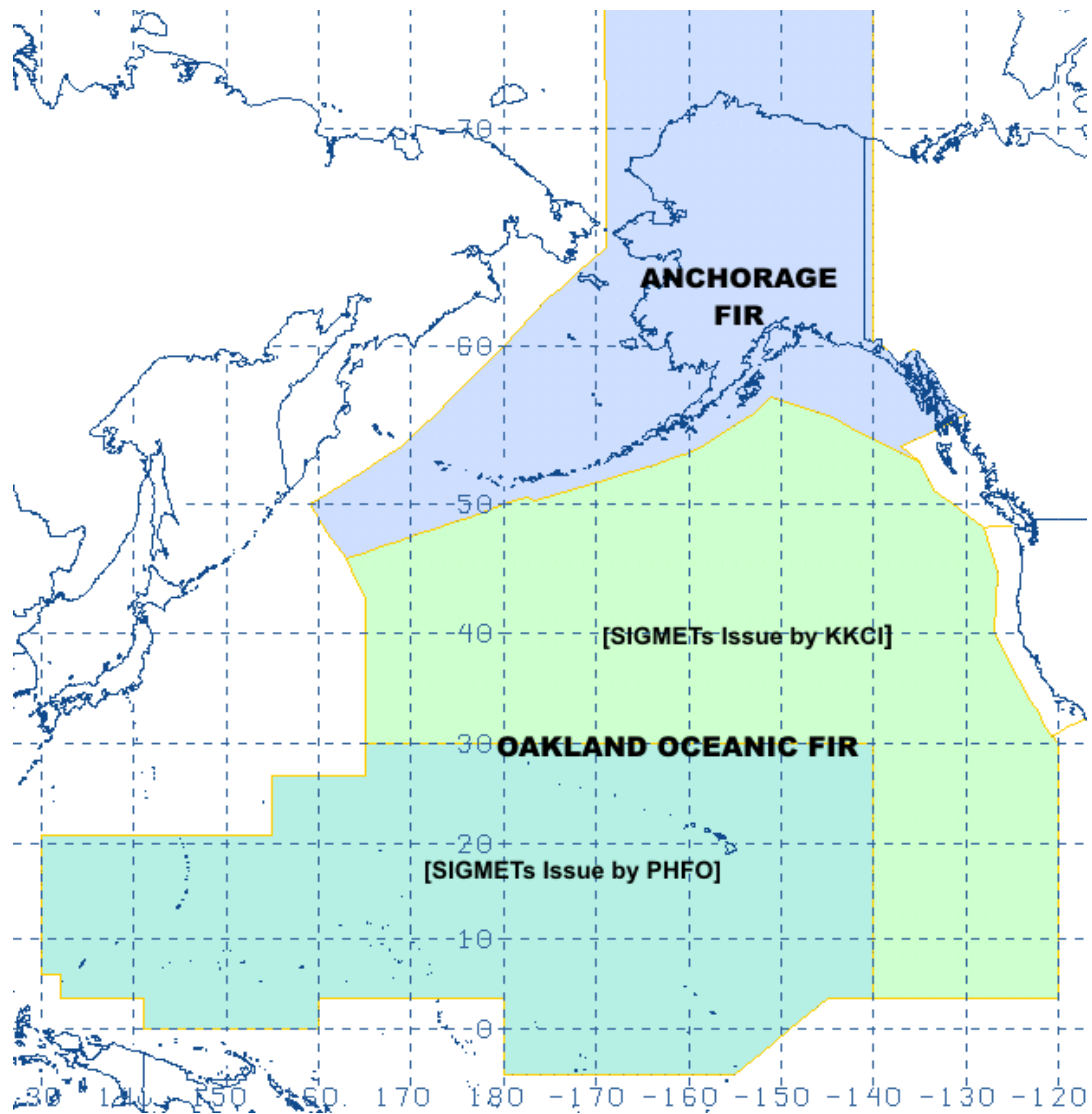

C3 Convective SIGMETs Areas of Responsibility for the CONUS



C4 AAWU Flight Advisory and FA Reference Points

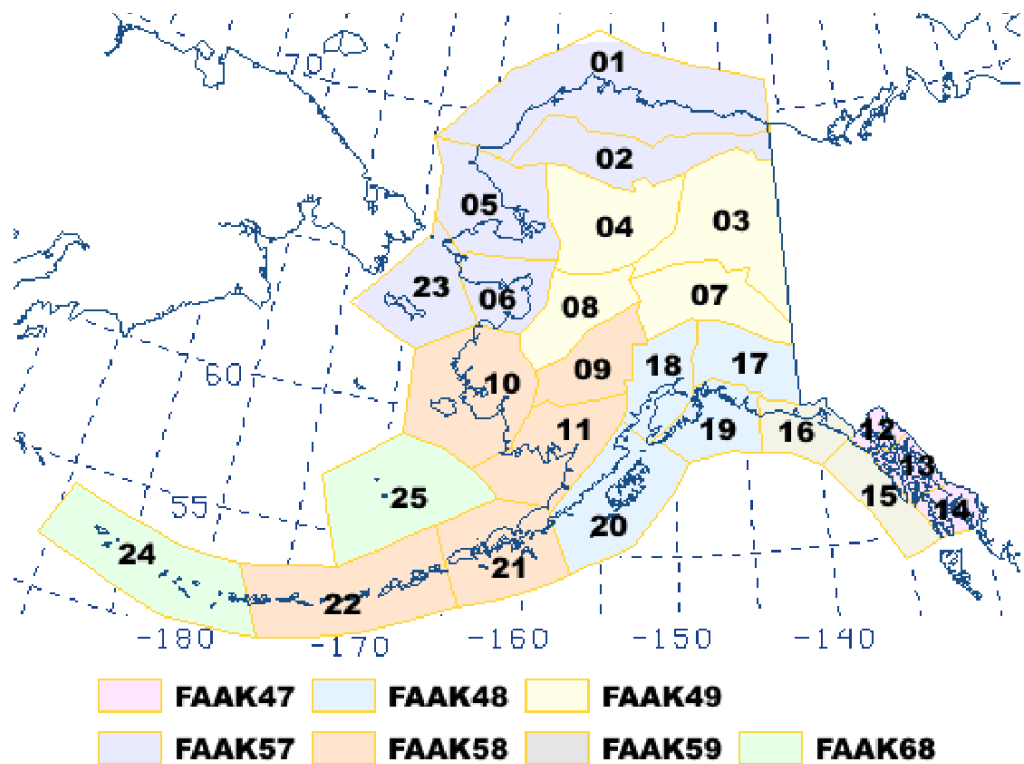

Zones

1. Arctic Coast Coastal	13. Central Southeast Alaska
2. North Slopes of the Brooks Range	14. Southern Southeast Alaska
3. Upper Yukon Valley	15. Coastal Southeast Alaska
4. Koyukuk and Upper Kobuk Valley	16. Eastern Gulf Coast
5. Northern Seward Peninsula-Lower Kobuk Valley	17. Copper River Basin
6. Southern Seward Peninsula-Eastern Norton Sound	18. Cook Inlet-Susitna Valley
7. Tanana Valley	19. Central Gulf Coast
8. Lower Yukon Valley	20. Kodiak Island
9. Kuskowim Valley	21. Alaska Peninsula-Port Heiden to Unimak Pass
10. Yukon-Kuskowim Delta	22. Unimak Pass to Adak
11. Bristol Bay	23. St. Lawrence Island-Bering Sea Coast
12. Lynn Canal and Glacier Bay	24. Adak to Attu
	25. Pribilof Islands and Southeast Bering Sea

APPENDIX D - Definition of Terms

Embedded (EMBD) Thunderstorms or CB: Thunderstorms or CB clouds that are embedded in cloud layers or concealed by haze.

Extreme Turbulence (EXTREME TURB): Turbulence in which aircraft are violently tossed about and are practically impossible to control. It may cause structural damage.

Flight Information Region (FIR): An airspace of defined dimensions within which flight information service and alerting service are provided.

Flight Levels: A surface of constant atmospheric pressure which is related to a specific pressure datum, 1013.2 hectopascals (hPa), and is separated from other such surfaces by specific pressure intervals.

Frequent (FRQ) thunderstorms or CB: Consisting of elements with little or no separation between adjacent thunderstorms with a maximum spatial coverage greater than 75 percent of the area affected by the phenomena at a fixed time or during the period of validity.

Instrument Meteorological Conditions (IMC): Ceiling < 1,000 feet and/or visibility < 3 miles. When LIMC is used as a sub-category of IMC for a product, IMC conditions are ceiling ≥ 500 feet and < 1,000 feet and /or visibility ≥ 1 mile and < 3 miles.

Isolated (ISOL) thunderstorms or CB: Consisting of individual features affecting an area with a maximum spatial coverage < 50 percent of the area affected by the phenomena at a fixed time or during the period of validity.

Line (of thunderstorms) (LINE TS): For SIGMET is defined as being at least 60 miles long with thunderstorms affecting at least 40 percent of its length.

Low Instrument Meteorological Conditions (LIMC): Ceiling < 500 feet and/or visibility < 1 SM. LIMC is a sub-category of Instrument Meteorological Conditions.

Marginal Visual Meteorological Conditions (MVMC): Ceiling ≥ 1,000 feet to ≤ 3,000 feet and/or visibility ≥ 3 to ≤ 5 miles.

Moderate Icing (MOD ICE): The rate of accumulation is such that even short encounters become potentially hazardous and use of deicing/anti-icing equipment or diversion is necessary.

Moderate Turbulence (MOD TURB): Turbulence that causes changes in attitude (pitch, roll, yaw) and/or altitude, but the aircraft remains in positive control at all times. It usually causes variations in indicated airspeed.

Mountain Obscuration (MTN OBSC): Conditions over significant portions of mountainous

geographical areas are such that pilots in flight should not expect to maintain visual meteorological conditions or visual contact with mountains or mountain ridges near their route of flight.

Obscured (OBSC) thunderstorms or CB: Obscured by haze, smoke or cloud or cannot be readily seen due to darkness.

Occasional (OCNL) thunderstorms or CB: An area with a maximum spatial coverage between 50 and 75 percent of the area affected by the phenomena at a fixed time of during the period of validity.

Scattered (SCT): ≥ 25 percent to ≤ 50 percent of area affected.

Severe Icing (SEV ICE): The rate of accumulation is such that normal deicing/anti-icing equipment fails to reduce or control the hazard. Immediate diversion is necessary.

Severe Turbulence (SEV TURB): Turbulence that causes large, abrupt changes in altitude and/or attitude. It usually causes large variations in indicated airspeed. Aircraft may be momentarily out of control.

Visual Meteorological Conditions (VMC): Ceiling $> 3,000$ feet and visibility > 5 miles.

Volcanic Eruption: For this directive, a volcano eruption has occurred when an eruption report is received from a volcano observatory. A volcanic eruption is also considered to have occurred regardless of volcano observatory notification if reported by PIREP, or ground observer, or if remote sensing data indicates that an eruption has occurred based on satellite imagery or radar data or any other reliable sources are identified.

Volcanic Ash: For the purpose of this chapter volcanic ash is any ash that can be seen by any one or more of the following: satellite imagery (visible, IR, or multi-channel), PIREPs, ground observations, radar and ship reports.

Very High Frequency Omnidirectional Range (VOR): a type of short-range navigation system; an antenna location in this system is often referred to colloquially as a VOR.

Widely scattered (WDLY SCT): Less than 25 percent of area affected.

Widespread (WDSPR): 50 percent or greater of the area affected.

APPENDIX E - ICAO Meteorological Information Exchange Model (IWXXM) and US Weather Exchange (WX)

The World Meteorological Organization (WMO), under the sponsorship of the International Civil Aviation Organization (ICAO), created and maintains the IWXXM data format to report aviation weather information in Extensible Markup Language (XML), a widely recognized standard for data exchange over the Internet. IWXXM's product representations are intended for use in machine-to-machine operational exchanges of meteorological information important to aviation.

IWXXM includes XML-based representations for Traditional Alphanumeric Code (TAC) products standardized in the following technical specifications:

- ICAO Annex 3, Meteorological Service for International Air Navigation
- WMO-No. 49, Vol. II, Technical Regulations. Volume II: Meteorological Service for International Air Navigation²⁸
- WMO-No. 306, Vol. I.1, Manual on Codes - International Codes, Volume I.1, Annex II to the WMO Technical Regulations: Part A- Alphanumeric Codes

Data available in the IWXXM data standard include routine surface weather reports (METARs [from Meteorologique Aviation Régulière]); special weather reports (SPECI), Terminal Aerodrome Forecasts (TAF), Tropical Cyclone, Volcanic Ash, and Space Weather Advisories; Airmen's Meteorological Information (AIRMET); and Significant Meteorological Information (SIGMET) warnings for convective and non-convective weather conditions that can adversely affect aviation.

IWXXM-US. U.S. exceptions to ICAO- and WMO-regulated TAC and IWXXM products are reflected in the "IWXXM-US" XML namespace, which contains XML schemas that "extend" IWXXM schemas to fully capture all weather information the United States has declared to ICAO that it will report.

XML schema defines the "building blocks" of an XML document, namely the elements and attributes that can appear in the document, including the number and order of the data elements, and data types for the elements and their attributes (e.g., unit of measure). IWXXM messages issued by the United States follow ICAO/WMO IWXXM "rules" or schema while including different or additional information, such as remarks appended to a surface observation, that follow IWXXM-US schema.

USWX. The USWX XML namespace constitutes a set of XML schemas developed by the NWS Meteorological Development Lab. USWX schema describes meteorological products issued by the United States to support domestic aviation operations; these products are not in Annex 3 but are required by the FAA and the aviation industry for machine-to-machine communication of operational meteorological information.

NWS XML schemas are available through links available on MDL's Data Modeling web page.

Schemas for XML messages referenced in this directive are available online.

Product	XML Namespace*	Schema Link
G-AIRMET	USWX	https://nws.weather.gov/schemas/uswx/1.0/G-Airmet.xsd
SIGMET	IWXXM	https://schemas.wmo.int/iwxxm/3.0/sigmet.xsd
TCF	USWX:	https://nws.weather.gov/schemas/uswx/1.0/cwfg.xsd