

WEATHER BUREAU
Office of Hydrology
Washington, D.C.

March 1969

Elements of River Forecasting (Revised)



Technical Memorandum WBTM HYDRO 9

U.S. DEPARTMENT OF COMMERCE / ENVIRONMENTAL SCIENCE SERVICES ADMINISTRATION

ESSA TECHNICAL MEMORANDA

Office of Hydrology Series

The Office of Hydrology develops procedures for making river and water supply forecasts, analyzes hydrometeorological data for planning and design criteria for other agencies, and conducts pertinent research and development.

ESSA Technical Memoranda in the Office of Hydrology series facilitate prompt distribution of scientific and technical material by staff members, cooperators, and contractors. Results presented in this series may be preliminary in nature and may be published formally elsewhere at a later date.

Memoranda listed below are available from the Clearinghouse for Federal Scientific and Technical Information, U.S. Department of Commerce, Sills Bldg., 5285 Port Royal Road, Springfield, Va. 22151. Price: \$3.00 hard copy; \$0.65 microfiche. Order by accession number shown in parentheses at end of each entry.

- TN 44 HYDRO 1 Infrared Radiation from Air to Underlying Surface.
Vance A. Myers, May 1966. In former Weather Bureau
Technical Notes series. (PB-170 664)

- WBTM HYDRO 2 Annotated Bibliography of ESSA Publications of Hydro-
meteorological Interest. J. L. H. Paulhus, February 1967.
(Superseded by WBTM HYDRO 8)

- WBTM HYDRO 3 The Role of Persistence, Instability, and Moisture in the
Intense Rainstorms in Eastern Colorado, June 14-17, 1965.
F. K. Schwarz, February 1967. (PB-174 609)

- WBTM HYDRO 4 Elements of River Forecasting. Marshall M. Richards and
Joseph A. Strahl, October 1967. (Superseded by WBTM HYDRO 9)

- WBTM HYDRO 5 Meteorological Estimation of Extreme Precipitation for
Spillway Design Floods. Vance A. Myers, October 1967.
(PB-177 687)

- WBTM HYDRO 6 Annotated Bibliography of ESSA Publications of Hydro-
meteorological Interest. J. L. H. Paulhus, November 1967.
(Superseded by WBTM HYDRO 8)

- WBTM HYDRO 7 Meteorology of Major Storms in Western Colorado and
Eastern Utah. Robert L. Weaver, January 1968.
(PB-177 491)

- WBTM HYDRO 8 Annotated Bibliography of ESSA Publications of Hydro-
meteorological Interest. J. L. H. Paulhus, August 1968.
(PB-179 855)

**U.S. DEPARTMENT OF COMMERCE
Environmental Science Services Administration
Weather Bureau**

ESSA Technical Memorandum WBTM HYDRO 9

**ELEMENTS OF RIVER FORECASTING
(Revised)**

**Marshall M. Richards
Joseph A. Strahl**



OFFICE OF HYDROLOGY

**SILVER SPRING, MD.
March 1969**

Reprinted April 1977

U.S. DEPARTMENT OF COMMERCE
Environmental Science Services Administration
Sanitary Bureau

UDC 556.16.06:551.579.4:551.509.58(07)

UDC 556.16.06:551.579.4:551.509.58(07)

551.5	Meteorology
.509	Forecasting
.58	Special forecasts
.579	Hydrometeorology
.4	Surface water fluctuation
556	Hydrology
.16	Runoff
.06	Forecasting runoff
(07)	Manuals

Joseph A. Smith
March 1952



OFFICE OF HYDROLOGY

SILVER SPRING, MD.
March 1952

Submitted April 1952

CONTENTS

	Page
Introduction.....	1
Value of forecasting storm runoff.....	2
Extension of warning times.....	2
More efficient operation of water-control structures.....	2
Runoff.....	3
Discussion of specific processes involved.....	3
Relative time variations of elements throughout the period of runoff.....	5
Possible methods of correlating storm runoff to rainfall.....	6
Graphical solutions.....	6
Collection of basic data for development of runoff relation.....	9
Requirements for the basin to be studied.....	9
Selection of storms to be studied.....	9
Evaluation of variables required.....	10
Coaxial graphical correlation analysis	14
Derivation of initial curves.....	15
Refinement by successive approximation.....	15
Problems in application.....	16
Possibilities for refinement of the coaxial graphical correlation.....	17
Alternate methods for estimating runoff.....	18
Use of index basins.....	18
Initial base flow as an index to rainfall-runoff.....	18
Infiltration approach.....	19
Possibilities of soil-moisture accounting.....	20
Development of unit hydrographs.....	22
Storm selection.....	23
Mass curves.....	23
Development.....	24
Unitgraph conversion.....	24

	Page
Streamflow routing.....	25
Crest stage relations.....	25
Routing.....	26
Operational problems in river forecasting.....	27
Collection of basic data.....	27
Methods of preparing forecasts.....	29
Computing runoff from melting snow.....	31
Flash flood warning procedures.....	32

TABLES

		Page
Table	1. Computation of storm duration.....	
	2. Week number.....	33
	3. Rating table.....	34
	4. Unitgraph development.....	35
	5. Computation of storm runoff.....	36
	6. Forecast computation sheet.....	37
	7. Station A 12-hour unitgraph.....	38
	8. Station B local area 12-hour unitgraph.....	39
	9. Forecast record sheet.....	40
	10. Flash-flood warning procedure.....	40

FIGURES

Figure	1. Rainfall-runoff relation for White Oak Bayou at Houston, Tex.....	41
	2. Rainfall-runoff relation using soil condition as a parameter.....	41
	3. Areal averaging of precipitation.....	42
	4. Example rating curve.....	43
	5. Hydrograph analysis.....	44
	6. Computation and plotting of antecedent precipitation index (API).....	45
	7. Development of runoff relation for the Monocacy River at Jug Bridge, Md.....	46
	8. Operational runoff relation for the Monocacy River at Jug Bridge, Md.....	47
	9. Runoff relation using initial groundwater discharge as a parameter.....	48
	10. Application of infiltration - capacity curve.....	48
	11. Application of ϕ index in estimating runoff.....	48
	12. Sample hydrograph.....	49
	13. Simple gage relation for the Sacramento River from Ord Ferry to Butte City, Calif.....	50
	14. Determining K and L.....	51
	15. K and L routing.....	52
	16. Basin map.....	53
	17. Forecast hydrograph.....	54
	18. Rating curves.....	55
	19. Forecast hydrograph.....	56
	20. Typical snowmelt relation.....	57

TABLE

Page

1	1. Description of water distribution	23
2	2. Basic numbers	24
3	3. Starting time	25
4	4. Distribution of water	26
5	5. Comparison of water	27
6	6. Comparison of water	28
7	7. Section A is water	29
8	8. Section B is water	30
9	9. Section C is water	31
10	10. Section D is water	32
11	11. Section E is water	33

TABLE

1	1. Description of water distribution	23
2	2. Basic numbers	24
3	3. Starting time	25
4	4. Distribution of water	26
5	5. Comparison of water	27
6	6. Comparison of water	28
7	7. Section A is water	29
8	8. Section B is water	30
9	9. Section C is water	31
10	10. Section D is water	32
11	11. Section E is water	33
12	12. Section F is water	34
13	13. Section G is water	35
14	14. Section H is water	36
15	15. Section I is water	37
16	16. Section J is water	38
17	17. Section K is water	39
18	18. Section L is water	40
19	19. Section M is water	41
20	20. Section N is water	42
21	21. Section O is water	43
22	22. Section P is water	44
23	23. Section Q is water	45
24	24. Section R is water	46
25	25. Section S is water	47
26	26. Section T is water	48
27	27. Section U is water	49
28	28. Section V is water	50
29	29. Section W is water	51
30	30. Section X is water	52
31	31. Section Y is water	53
32	32. Section Z is water	54
33	33. Section AA is water	55
34	34. Section AB is water	56
35	35. Section AC is water	57
36	36. Section AD is water	58
37	37. Section AE is water	59
38	38. Section AF is water	60
39	39. Section AG is water	61
40	40. Section AH is water	62
41	41. Section AI is water	63
42	42. Section AJ is water	64
43	43. Section AK is water	65
44	44. Section AL is water	66
45	45. Section AM is water	67
46	46. Section AN is water	68
47	47. Section AO is water	69
48	48. Section AP is water	70
49	49. Section AQ is water	71
50	50. Section AR is water	72
51	51. Section AS is water	73
52	52. Section AT is water	74
53	53. Section AU is water	75
54	54. Section AV is water	76
55	55. Section AW is water	77
56	56. Section AX is water	78
57	57. Section AY is water	79
58	58. Section AZ is water	80
59	59. Section BA is water	81
60	60. Section BB is water	82
61	61. Section BC is water	83
62	62. Section BD is water	84
63	63. Section BE is water	85
64	64. Section BF is water	86
65	65. Section BG is water	87
66	66. Section BH is water	88
67	67. Section BI is water	89
68	68. Section BJ is water	90
69	69. Section BK is water	91
70	70. Section BL is water	92
71	71. Section BM is water	93
72	72. Section BN is water	94
73	73. Section BO is water	95
74	74. Section BP is water	96
75	75. Section BQ is water	97
76	76. Section BR is water	98
77	77. Section BS is water	99
78	78. Section BT is water	100
79	79. Section BU is water	101
80	80. Section BV is water	102
81	81. Section BW is water	103
82	82. Section BX is water	104
83	83. Section BY is water	105
84	84. Section BZ is water	106
85	85. Section CA is water	107
86	86. Section CB is water	108
87	87. Section CC is water	109
88	88. Section CD is water	110
89	89. Section CE is water	111
90	90. Section CF is water	112
91	91. Section CG is water	113
92	92. Section CH is water	114
93	93. Section CI is water	115
94	94. Section CJ is water	116
95	95. Section CK is water	117
96	96. Section CL is water	118
97	97. Section CM is water	119
98	98. Section CN is water	120
99	99. Section CO is water	121
100	100. Section CP is water	122
101	101. Section CQ is water	123
102	102. Section CR is water	124
103	103. Section CS is water	125
104	104. Section CT is water	126
105	105. Section CU is water	127
106	106. Section CV is water	128
107	107. Section CW is water	129
108	108. Section CX is water	130
109	109. Section CY is water	131
110	110. Section CZ is water	132
111	111. Section DA is water	133
112	112. Section DB is water	134
113	113. Section DC is water	135
114	114. Section DD is water	136
115	115. Section DE is water	137
116	116. Section DF is water	138
117	117. Section DG is water	139
118	118. Section DH is water	140
119	119. Section DI is water	141
120	120. Section DJ is water	142
121	121. Section DK is water	143
122	122. Section DL is water	144
123	123. Section DM is water	145
124	124. Section DN is water	146
125	125. Section DO is water	147
126	126. Section DP is water	148
127	127. Section DQ is water	149
128	128. Section DR is water	150
129	129. Section DS is water	151
130	130. Section DT is water	152
131	131. Section DU is water	153
132	132. Section DV is water	154
133	133. Section DW is water	155
134	134. Section DX is water	156
135	135. Section DY is water	157
136	136. Section DZ is water	158
137	137. Section EA is water	159
138	138. Section EB is water	160
139	139. Section EC is water	161
140	140. Section ED is water	162
141	141. Section EE is water	163
142	142. Section EF is water	164
143	143. Section EG is water	165
144	144. Section EH is water	166
145	145. Section EI is water	167
146	146. Section EJ is water	168
147	147. Section EK is water	169
148	148. Section EL is water	170
149	149. Section EM is water	171
150	150. Section EN is water	172
151	151. Section EO is water	173
152	152. Section EP is water	174
153	153. Section EQ is water	175
154	154. Section ER is water	176
155	155. Section ES is water	177
156	156. Section ET is water	178
157	157. Section EU is water	179
158	158. Section EV is water	180
159	159. Section EW is water	181
160	160. Section EX is water	182
161	161. Section EY is water	183
162	162. Section EZ is water	184
163	163. Section FA is water	185
164	164. Section FB is water	186
165	165. Section FC is water	187
166	166. Section FD is water	188
167	167. Section FE is water	189
168	168. Section FF is water	190
169	169. Section FG is water	191
170	170. Section FH is water	192
171	171. Section FI is water	193
172	172. Section FJ is water	194
173	173. Section FK is water	195
174	174. Section FL is water	196
175	175. Section FM is water	197
176	176. Section FN is water	198
177	177. Section FO is water	199
178	178. Section FP is water	200
179	179. Section FQ is water	201
180	180. Section FR is water	202
181	181. Section FS is water	203
182	182. Section FT is water	204
183	183. Section FU is water	205
184	184. Section FV is water	206
185	185. Section FW is water	207
186	186. Section FX is water	208
187	187. Section FY is water	209
188	188. Section FZ is water	210
189	189. Section GA is water	211
190	190. Section GB is water	212
191	191. Section GC is water	213
192	192. Section GD is water	214
193	193. Section GE is water	215
194	194. Section GF is water	216
195	195. Section GG is water	217
196	196. Section GH is water	218
197	197. Section GI is water	219
198	198. Section GJ is water	220
199	199. Section GK is water	221
200	200. Section GL is water	222
201	201. Section GM is water	223
202	202. Section GN is water	224
203	203. Section GO is water	225
204	204. Section GP is water	226
205	205. Section GQ is water	227
206	206. Section GR is water	228
207	207. Section GS is water	229
208	208. Section GT is water	230
209	209. Section GU is water	231
210	210. Section GV is water	232
211	211. Section GW is water	233
212	212. Section GX is water	234
213	213. Section GY is water	235
214	214. Section GZ is water	236
215	215. Section HA is water	237
216	216. Section HB is water	238
217	217. Section HC is water	239
218	218. Section HD is water	240
219	219. Section HE is water	241
220	220. Section HF is water	242
221	221. Section HG is water	243
222	222. Section HH is water	244
223	223. Section HI is water	245
224	224. Section HJ is water	246
225	225. Section HK is water	247
226	226. Section HL is water	248
227	227. Section HM is water	249
228	228. Section HN is water	250
229	229. Section HO is water	251
230	230. Section HP is water	252
231	231. Section HQ is water	253
232	232. Section HR is water	254
233	233. Section HS is water	255
234	234. Section HT is water	256
235	235. Section HU is water	257
236	236. Section HV is water	258
237	237. Section HW is water	259
238	238. Section HX is water	260
239	239. Section HY is water	261
240	240. Section HZ is water	262
241	241. Section IA is water	263
242	242. Section IB is water	264
243	243. Section IC is water	265
244	244. Section ID is water	266
245	245. Section IE is water	267
246	246. Section IF is water	268
247	247. Section IG is water	269
248	248. Section IH is water	270
249	249. Section II is water	271
250	250. Section IJ is water	272
251	251. Section IK is water	273
252	252. Section IL is water	274
253	253. Section IM is water	275
254	254. Section IN is water	276
255	255. Section IO is water	277
256	256. Section IP is water	278
257	257. Section IQ is water	279
258	258. Section IR is water	280
259	259. Section IS is water	281
260	260. Section IT is water	282
261	261. Section IU is water	283
262	262. Section IV is water	284
263	263. Section IW is water	285
264	264. Section IX is water	286
265	265. Section IY is water	287
266	266. Section IZ is water	288
267	267. Section JA is water	289
268	268. Section JB is water	290
269	269. Section JC is water	291
270	270. Section JD is water	292
271	271. Section JE is water	293
272	272. Section JF is water	294
273	273. Section JG is water	295
274	274. Section JH is water	296
275	275. Section JI is water	297
276	276. Section JJ is water	298
277	277. Section JK is water	299
278	278. Section JL is water	300
279	279. Section JM is water	301
280	280. Section JN is water	302
281	281. Section JO is water	303
282	282. Section JP is water	304
283	283. Section JQ is water	305
284	284. Section JR is water	306
285	285. Section JS is water	307
286	286. Section JT is water	308
287	287. Section JU is water	309
288	288. Section JV is water	310
289	289. Section JW is water	311
290	290. Section JX is water	312
291	291. Section JY is water	313
292	292. Section JZ is water	314
293	293. Section KA is water	315
294	294. Section KB is water	316
295	295. Section KC is water	317
296	296. Section KD is water	318
297	297. Section KE is water	319
298	298. Section KF is water	320
299	299. Section KG is water	321
300	300. Section KH is water	322
301	301. Section KI is water	323
302	302. Section KJ is water	324
303	303. Section KK is water	325
304	304. Section KL is water	326
305	305. Section KM is water	327
306	306. Section KN is water	328
307	307. Section KO is water	329
308	308. Section KP is water	330
309	309. Section KQ is water	331
310	310. Section	

ELEMENTS OF RIVER FORECASTING

Marshall M. Richards

Joseph A. Strahl

INTRODUCTION

The flow of a river fluctuates through a considerable range on an annual basis. It is characterized by rises, due to runoff from rainfall and snowmelt, followed by gradually receding flow. Flood forecasts are primarily concerned with predicting the time and height of stages caused by peak flows. Forecasts are also made for the stages expected at various times during the period of rising and falling stream levels. In recent years, the trend has been toward more detailed forecasts of continuous flow. Water supply forecasts predict the total flow for an entire water year. These forecasts are feasible in mountainous areas where water is stored in snowpacks during the winter and released into the streams when snowmelt occurs.

This paper is chiefly concerned with forecasting storm hydrographs with emphasis on the crests. There are three major steps to forecasting the rise that results from a rainstorm or period of heavy snowmelt:

1. Estimating the volume of water that will run directly off the land surface into the stream. This step utilizes the rainfall-runoff relation and computation of rate of snowmelt.
2. Forecasting the distribution of this volume of water with time as it passes a forecast point. The unitgraph is usually used for this purpose.
3. Forecasting the change in shape of the floodwave as it moves downstream. This is known as streamflow routing.

A simple treatment of these steps is provided in "Elements of River Forecasting," as an introduction into the problems of developing river forecast procedures and applying these procedures to the preparation of forecasts.

VALUE OF FORECASTING STORM RUNOFF

The development of reliable procedures for the estimation of runoff that will result from storm rainfall has made possible an adequate system of river forecasting. Runoff is defined as the water, derived from precipitation, that ultimately reaches stream channels.

Extension of Warning Times

Before adequate procedures were developed for estimating runoff from storm rainfall, the river forecaster could not issue specific forecasts for stations in the headwaters. It was necessary to receive reports of crest stages at these stations before forecasts could be made for stations farther downstream, often a considerable time after the storm had ended. Runoff estimates now make it possible to prepare flood warnings for all stations while a storm is progressing. Thus, forecasts can be made for more stations and longer warning times are possible for downstream stations.

In small headwater areas subject to flash floods, the crest of a flood may occur after the end of a flood-producing rain. In such a situation, warnings are possible only when based directly on rainfall and estimates of resultant runoff. In such situations, procedures are required which short-cut the normal forecast procedures and produce warnings in a minimum of time. The Weather Bureau furnishes a forecast procedure to a local representative in the community so that he can gather rainfall information and issue a forecast with a minimum time delay. Radar operators alert the representative when heavy rainfall areas are noted and may aid in the evaluation of the areal distribution of the rainfall.

For large drainage areas, time is available to use more refined procedures. This is particularly true for general rains of relatively uniform distribution in time and area. More accurate forecasts can usually be made with sufficient warning to make possible the evacuation of people and property before the flood strikes. In many situations, the warning time may be days or even weeks. Even at points well downstream on a major river system, however, there can be situations where floods may occur within a few hours after the end of heavy rains. When the river stage has become high and nearly stationary, it is possible that a heavy rain in the portion of the drainage area immediately above a forecast point will cause a rapid rise to critical stages. In this situation the ability to estimate runoff is required to provide the needed forecasts.

More Efficient Operation of Water-Control Structures

Up to this point, the discussion has been limited to river forecasting on uncontrolled streams, where the purpose is to issue warnings to affected interests in the flood plain. River forecasts are of equal importance for the efficient operation of any water-control structure or water management program.

A few water-control structures are self-regulating, that is, they have fixed openings and require no manual operations. For such structures, river forecasts have the same significance as in uncontrolled streams, serving as warnings to those affected. Most water-control structures, however, require varying degrees of manual control. For example, most levee systems have many openings which must be closed as rivers rise. If these closures are not made in time, the levee will not serve its intended purpose. Timely river forecasts are needed to give as much time as possible for making these closures. Conversely, river forecasts may indicate that the river will stop rising before reaching stages requiring closures and much work can be avoided.

Efficient operation of a dam with movable gates is highly dependent upon accurate forecasts of inflow into the reservoir. It is also necessary to have forecasts of river conditions downstream in order to minimize the effect of releases from the dam at critical points. This is particularly true for multi-purpose dams which are intended for many uses such as flood control, generation of power, irrigation, navigation, and pollution abatement. Flood control is most effective when the reservoir is kept nearly empty while most other uses are best served by storing as much water as possible. Such conflicting interests create operational problems which can be handled effectively only with reliable forecasts of inflow.

RUNOFF

In order to understand the problems involved in the development of runoff relations, it is first desirable to examine the factors that affect runoff--that part of the hydrologic cycle from the incidence of precipitation upon the land area to its subsequent discharge through stream channels or its direct return to the atmosphere through the process of evaporation or transpiration.

Discussion of Specific Processes Involved

Interception--When rain begins after a period of dry weather, much of the initial fall is stored temporarily on the vegetal cover as interception. Interception storage capacity is normally satisfied early in any storm. After that, interception practically ceases except for storage capacity that is recovered through evaporation from the wetted surfaces of the foliage. Interception is probably a significant percentage of the annual rainfall in most areas since it involves a large percentage of rain from a number of small storms. For large storms where runoff forecasts are most important, however, interception is relatively unimportant. Estimates of its value in well-developed forested areas are about 0.10 inch per storm. Its effect varies with basin cover and season in areas outside the tropics.

Depression storage--Also involved from the beginning of rain is depression storage. This is water temporarily stored in surface depressions which vary widely in area and depth. Whenever rainfall intensity exceeds the infiltration capacity, these depressions begin to fill. As the depres-

sions are filled, inflow into them must be balanced by outflow, infiltration, and evaporation. Small depressions fill rapidly after which overland flow begins, some of which ends up in larger depressions while some reaches stream channels. This process continues, with larger and larger depressions filling as the storm continues, resulting in more and more overflow reaching the streams. Between storms, water held in depressions is either absorbed by the soil through infiltration or evaporated into the atmosphere. Measurement of depression storage is as difficult and impracticable as the measurement of interception. Depressions of appreciable area, relative to the size of the drainage basin, should be excluded from the storm analysis. Common practice is for depression storage to be included with interception and treated as an initial loss with respect to storm runoff. Depression storage is a basin characteristic subject to change with terracing, leveling or other contouring. In most basins it probably continues to be a small factor all through the storm period.

Infiltration, percolation, and soil-moisture storage--Infiltration is the passage of water through the soil surface into the soil and percolation is the movement of water within the soil. These two phenomena should be considered together, since infiltration cannot continue to take place unless percolation has allowed water that infiltrated earlier to move out of the surface layer of the soil.

Once water has entered the ground, gravity tends to pull it downward, following paths of least resistance toward the groundwater table. Capillary forces work against this, however, tending to divert this water into storage in capillary pore spaces. When the soil is dry, this diversion by capillary action is quite large. There is, of course, a limit to the capillary pore space in the soil and it is a function of soil types and conditions. This limit affects the amount of water the soil will retain against the force of gravity. It is usually referred to as the field capacity. During a storm the capillary forces tending to divert water from its path of least resistance become progressively smaller. The rate at which water passing through the soil surface can be disposed of decreases and the end result is that the rate of infiltration decreases as a storm progresses. This also explains the reduced rates of infiltration in storms when all or part of the capillary pores have been filled during previous storms.

Infiltration rates tend to be highest for loose, sandy soils and lowest for tight, clay soils. However, the sandy soils have much less field capacity than the clay soils. Quite obviously the soil types predominant in an area will have a great effect on runoff as will the initial moisture content of the soil.

The effect of various ground covers on infiltration and percolation is difficult to determine with any accuracy. Evaluation is complicated by the fact that ground cover affects interception as well as infiltration and runoff in several ways. The root system of vegetation makes soils more pervious, that is, the water can enter and flow through the soil more easily. Foliage shields the surface from the direct impact of raindrops and this reduces packing of the soil surface, which is an important factor,

particularly in high intensity rainfall. Ground cover also retards water flow across the soil surface and thus gives the water more time to infiltrate the soil.

Relative Time Variations of Elements Throughout the Period of Runoff

The phenomena discussed above, plus many others, are involved in estimating runoff amounts. A description of the relative time variations of pertinent runoff factors during a large storm of uniform intensity which falls on an initially rather dry basin is necessary.

At the onset of precipitation the only portion which will run off is that which falls directly into the river. This is a function of the area of the water surface of the stream and is usually a fairly small percentage of the total area. Though small, it is an element that continues throughout the storm, increasing as the river rises and spreads out.

Interception is another element that comes into play early in the storm. Its value is at its highest at the beginning, particularly during summer with dense ground cover. Its total effect is quite small in large storms and is of little consequence. Intercepted precipitation is usually returned to the atmosphere by evaporation.

Loss to depression storage begins early in the storm and decreases in effect as the storm progresses and small depressions are filled. It usually continues to have some effect throughout the storm, but this can vary greatly with slope and other factors. While usually treated as a loss, some of the water eventually infiltrates into the soil and may run off. The rest is returned to the atmosphere through evaporation.

As a general rule, the largest part of the precipitation that does not end up as runoff is taken to satisfy the soil-moisture deficiency. Its effect is greatest at the beginning of the storm. In general this deficiency must be nearly satisfied before appreciable surface runoff occurs, but it does continue to have considerable effect throughout the storm due to the relatively slow downward movement of water through the soil profile. In the case of very intense storms, soil-moisture deficiency becomes less important, since the infiltration rate is usually the limiting factor in this situation.

Water which infiltrates the soil surface, but which is not retained as soil-moisture, must either move laterally and enter the stream as interflow or move down to the groundwater table. If the water table is deep enough, groundwater flow from it may not contribute to streamflow until well after the time under study, if ever. There is a great deal of disagreement as to the relative importance of interflow, and it is difficult to determine what percent of runoff it represents.

Surface runoff starts very slowly, gradually increases, and late in a long storm its rate may be nearly the same as that of the rainfall. If snowmelt is involved, runoff may well exceed precipitation. As indicated above, its value relative to interflow is open to question. For most

forecasting procedures it is not too important to determine the boundaries between interflow and surface flow on the one hand and base flow on the other. In this paper, hydrographs will be divided into 2 components: base flow and direct runoff or surface flow.

POSSIBLE METHODS OF CORRELATING STORM RUNOFF TO RAINFALL

Due to the many physical processes which affect runoff, as discussed on page 3, and the complexities of even a small natural basin, any sort of a direct physical or analytic approach to the problem of forecasting runoff is not practical. Even if a modern computer could handle the problem, it would probably be physically impossible - and certainly economically impractical - to make the measurements required. As a result, the usual solution is to analyze storms covering a wide range of conditions for the drainage area above a point for which forecasts are desired. Rainfall and runoff for these storms are evaluated and procedures developed to correlate them.

The complexity of the correlation of runoff to rainfall makes the use of a graphical approach to the problem desirable. Each element of data retains its identity throughout the analysis. The analyst can develop a forecast procedure which is analogous to the processes which occur in nature, and avoid the work of deriving complex equations involving coefficients and exponents.

Graphical Solutions

Direct correlation of runoff to rainfall

A simple plotting of storm rainfall against resultant runoff cannot be expected to yield a usable product, but does indicate the nature of the problem. (Fig. 1)

Addition of a third variable

The amount of runoff resulting from a given rainfall in a given basin depends upon many things - such as vegetal cover, soil characteristics, initial moisture deficiencies, and storm characteristics such as areal distribution and intensity of the storm.

Vegetal cover and soil characteristics in a specific basin usually remain relatively constant year after year, so that the basic data for such basins reflect the effect of these parameters. An important exception might occur when a large forest fire removes a great portion of the vegetal cover from a basin. Storm characteristics are different with each storm but they can be reasonably well-determined with an adequate network of precipitation stations.

A more serious problem is an adequate and practical means of evaluating moisture deficiency in the study basin as it exists at the beginning of each storm event. This must be done in such a way that the evaluation can be used objectively in the forecast procedure. It is possible to make reasonably

reliable evaluations of soil moisture at certain points in the basin, but the necessary integration over a sizeable area introduces tremendous problems due to the infinite number and variety of soil profiles and surface conditions encountered in even a small drainage area. In addition, any quantitative method would necessarily have to consider the depression and interception storage above the surface of the soil.

A more practical solution to this problem is the use of some other measurable factor as an index to the initial soil moisture conditions.

Since the direct correlation of runoff to rainfall is quite poor, forecasters began to look for some variable - or variables - to improve it. An early approach was the use of a qualitative evaluation of soil conditions by the forecaster as shown in Figure 2. This places a premium on the judgement of the forecaster and makes it difficult to evaluate past data.

One of the first measurable variables introduced in the correlation of runoff to rainfall was the number of days since the last significant rain. This could hardly be objective since it was difficult to know how large the last rain had to be before assuming it to be significant. Other attempts to find an adequate index to soil moisture conditions, taking into account such factors as the season of the year, are described in the following sections.

Use of multi-variable coaxial relation

The relatively crude attempts mentioned above led gradually to more sophisticated means for correlating runoff to rainfall. One of the important steps was the type shown in Figure 8. This made practical the introduction of additional variables which were needed to adequately handle the problem.

The selection of parameters for use in a multi-variable graphical technique is most important. Rainfall is the major factor and the problem of its evaluation is discussed in some detail on page 9.

Runoff is the factor required in making river forecasts and its evaluation is discussed on page 9. Basin recharge is defined as that portion of the storm rainfall that is required to satisfy the demands of interception, depression storage, and soil-moisture. It is the difference between rainfall and runoff and is often referred to as "loss." Actually it is that part of the storm rainfall that replenished the moisture supply in the basin; hence, recharge.

This manual describes a method of predicting runoff from precipitation through the use of an index which takes into account antecedent precipitation, season of the year, and storm duration.

The index to soil moisture deficiency currently used in practically all forecasting operations of the United States Weather Bureau is an antecedent precipitation index which can be expressed by the equation

$$I = b_1 P_1 + b_2 P_2 + b_3 P_3 \dots + b_i P_i \quad (1)$$

where b_i is a constant and P_i is the basin precipitation which occurred i days before the storm under consideration. Such an equation is inconvenient for day-to-day use in river forecasting. A more stable form of this equation results if it is assumed that b decreases with time before the storm being considered according to a logarithmic recession. During times of no precipitation:

$$I_t = I_0 k^t \quad (2)$$

Where I_0 is the initial value of the antecedent precipitation index (API), I_t is the reduced value t days later, and k is a recession factor, letting t equal unity.

$$I_1 = k I_0 \quad (3)$$

The API for any day is equal to that of the day before multiplied by a factor of k . When rain occurs on any day, the amount is added to the index as illustrated in Figure 6. The value of k should be a function of physiographic, climatic, and vegetative characteristics of the basin and the actual evapotranspiration. Normally, k is assumed to be a constant somewhere between 0.85 and 0.95, with 0.90 the most commonly used value. When $k=0.90$ is used, the computation of the API value today is simply a matter of subtracting 10% from the API value for yesterday and adding the amount of any precipitation that may have occurred during the past 24 hours.

The antecedent precipitation index described above gives weight to precipitation falling over a period of about one month, with recent values having much effect and earlier rains less. Its ease of calculation and independence of personal judgment factors make it an attractive index, and it is an index that is widely used with rather good results.

The recession coefficient (k) used in computing the antecedent precipitation index essentially represents the process of drying out the basin. The drying rate will vary with season and an additional factor to account for this and other seasonal variations is needed. This is done by introducing the time of the year of the storm as a variable. This assumes that climatic factors affecting runoff conditions will vary the same way every year. This is not always the case and many ways of adjusting this variable have been suggested. Some of these are discussed on page 18.

This gives us rainfall, antecedent precipitation index and time of year to use in a correlation with runoff. The duration of the storm can also be added as a variable in the correlation. Evaluation of duration is sometimes a problem and means of computing it will be discussed on page 14.

COLLECTION OF BASIC DATA FOR DEVELOPMENT OF RUNOFF RELATION

The preceding section provided a general discussion of factors to be considered and possible methods of approaching the rainfall-runoff problem. Page 14 discusses graphical correlation procedure in more specific terms. Before the correlation can be accomplished, the collection of basic data must be considered. The initial phase of developing a forecast procedure for a basin involves selecting specific past storms for the study and the evaluation of rainfall, runoff, antecedent conditions and duration for each of the storms selected. If this information is not available for the basin requiring a forecast procedure, it may be necessary to synthesize a procedure from those procedures used in nearby similar basins.

Requirements for the Basin to be Studied

In small basins, concentration times are normally shorter and the problem of relating streamflow to the storm which caused it is considerably simpler than for larger basins. In a large basin, direct runoff from one storm may still be appreciable at the time a subsequent storm occurs, making it difficult to assign runoff to the rainfall that caused it. In addition, a small basin should have less areal variations in rainfall, making estimates of basin precipitation simpler. Small basins, however, may reflect changes in land use which would not be so significant if a larger area were being studied. It is necessary to have a record of streamflow measurements before a basin can be studied and, in some areas, these records may be lacking for small tributary streams. No specific rules can be set down on the proper size for a basin to use in a runoff study, but in general basins having drainage areas of from 100 to 2,000 or more square miles can be used if data limitations vs. forecast requirements make it desirable. When sufficient data are available, it is the usual practice to develop rainfall-runoff procedures to forecast headwater points and then to use the routing techniques described on page 25 to make forecasts for points farther downstream.

It is desirable to have at least ten years of streamflow and precipitation records for the basin to be studied and to have 50 to 100 storms covering a wide range of conditions available for study. This ideal is not always attained and it is necessary to work with whatever records are available. In computerized studies, the number of storms can be increased with little additional effort except that data must be prepared for analysis.

Selection of Storms to be Studied

After preliminary evaluation of available data, the next step is to select the individual storms to be studied. As wide a range of conditions as possible should be represented by the storms selected and it is necessary to use precipitation as well as streamflow records to select the storms to study. Storms with significant rainfall but little runoff should be considered as well as those which produce appreciable runoff in order to avoid a bias in the resultant procedures.

Storms with very uneven areal distribution of precipitation should be used with care since it is difficult to estimate average precipitation. Complex hydrographs resulting from long, sporadic rainfall should also be avoided since it becomes impossible to determine accurately the runoff to be attributed to a given rainfall.

Evaluation of Variables Required

Once the past storms have been selected for study, it remains to evaluate each of the variables selected for use in the correlation of each of the storms. It is important that this step be taken with as much care as possible, since errors in the basic data, particularly for the few-of-a-kind storms (such as very large ones), may cause considerable bias in the resultant relation. It is particularly important to use the same rules in evaluating variables in development as will be used later in applying the procedure to forecasting. This will tend to minimize any bias that might result from a specific analysis. It is also necessary to be consistent throughout the analysis for similar reasons.

Average Basin Precipitation

The first problem is to determine the average basin storm precipitation.

A basic rule is to be careful to include only the rainfall which actually produced the runoff to which it is to be related. Small amounts of precipitation falling after the hydrograph has started to recede should be included only if they appear to have occurred in time to contribute to storm runoff. In addition, small amounts of precipitation falling before the main storm should be excluded and these amounts included in antecedent precipitation computations. Long, complex storms should be subdivided if possible. Average basin rainfall for a specific storm period can be estimated in several ways. The arithmetic mean of the amounts measured in the basin is the simplest method. This gives good results in reasonably flat country if rain gages are uniformly distributed and the individual gage catches do not vary widely from the mean.

A more complex means of estimating mean basin precipitation is the Thiessen¹ network. Thiessen polygons are formed by perpendicular bisectors of lines connecting stations. This system provides for the weighting of the precipitation value for each gage in or near the basin. The stations for which rainfall reports are available are plotted on a map (see Fig. 3) and polygons drawn around each station. The sides of these polygons are the boundaries of the effective area attributed to each station. The area of each polygon is evaluated and then expressed as a percentage of the total area. For a given storm event the weighted average basin precipitation is determined by multiplying each station precipitation by its assigned percentage of area and totalling. This system in general will produce more accurate results than a simple arithmetic mean, but it does have limitations. One disadvantage is that any change in the gage network requires a revision of the station weights. If a gage value is missing

¹ A. H. Thiessen: "Precipitation for Large Areas;" Monthly Weather Review; U. S. Weather Bureau; Vol. 39; pp. 1082-1084; July, 1911.

only occasionally, it is the usual practice to estimate its value for use in the computation. This method assumes linear variation of precipitation between stations and assigns each polygon of area to the nearest station. It makes no allowance for orographic effects.

The isohyetal method is the most accurate means for estimating average precipitation when properly handled. Precipitation amounts at individual stations are plotted on a map of the basin (Fig. 3). The analyst then draws lines of equal precipitation called isohyets. The areas between successive isohyets are measured and expressed as a fractional part of the total basin area. This fraction is then multiplied by the average precipitation between these isohyets, usually used as the average of the two isohyetal values. The total of these products is the estimated average basin precipitation.

The accuracy of this method depends on the skill with which the isohyets are drawn. The use of linear interpolation between stations would result in approximately the same results as the use of the Thiessen network. The analyst should, however, make use of his knowledge of orographic effects in the basin and storm morphology. In basins with decided orographic effects, average monthly or seasonal basin precipitation patterns can be used with judgment to assist in drawing isohyets. One particular advantage of the isohyetal map is that all available knowledge and reports can be utilized. It also gives a useful display which points out centers of concentration which may affect the forecast.

Runoff

Discharge measurement information is usually available along with records of river stage at a point being studied. The amount of runoff attributed to a given storm must be determined by the analysis of the hydrograph. The stage of the river is the basic measurement, but a plotting of discharge against time (hydrograph) is required in order to analyze amounts of runoff. To accomplish this requires that the station be rated using discharge measurements at the point being studied. This information provides values of flow that have been measured at various stage heights. It must be used to convert stage to discharge when working with recorded data and vice versa when making forecasts. It can be converted into a rating curve such as shown in Figure 4 and into a rating table such as is shown in Table 3. On many streams, ratings change from time to time, due to such factors as shifting controls or scour of the stream bed. Care should be taken to use the rating that was effective at the time for the storm being studied. The most current rating curve or table should be used for forecast purposes. Ratings can be extended beyond the highest flood of record by using one of the methods described in hydrology textbooks. Extensions beyond known data should be clearly marked as approximations.

Hydrograph Separation

For facility in forecasting, runoff is usually assumed to fall into two classes - (1) direct runoff, and (2) base or groundwater flow. The division of a storm hydrograph into its groundwater and direct runoff components is referred to as hydrograph separation. There obviously is no way of distinguishing between groundwater and direct flow in a stream at any time and the definition of these two components is rather arbitrary. As a result the method of separation is not as important as consistency throughout development and in operational application.

One method of hydrograph separation involves the use of a constant time base called "n." N is the time, in days or hours, between the crest of the hydrograph and the point on the falling limb of the hydrograph when surface runoff becomes zero and the baseflow is the only component left in the hydrograph. N should be determined for a particular basin by inspecting several of its storm hydrographs. A line similar to ABC in Figure 5 should be drawn on each of the hydrographs in such a way that a reasonable rise in baseflow after the crest is indicated. The line segment AB is a continuation of the recessing that was occurring before runoff started. Line segment BC represents a reasonable rise in the baseflow. The line BG in Figure 5 would indicate an unrealistic rise in baseflow. After the separations are made on each of the several hydrographs, an average n value should be determined; and this value of n is then used to separate all hydrographs studied in the development of rainfall-runoff relations and unit hydrographs for that basin. Chapter 7 in "Hydrology for Engineers" by Linsley, Kohler, and Paulhus describes more refined methods of hydrograph separation.

The area bounded by the storm hydrograph and the line of separation (ABC in Fig. 5), is considered to be the direct runoff for the storm. Since the vertical scale of a hydrograph is in cubic feet per time and the horizontal scale is time, this area represents a volume of water. On such a graph, it is convenient to use a unit of volume called "day-second-foot" (dsf). One dsf is the volume of water involved in a flow of one cubic foot per second (cfs) throughout 24 hours or a volume of 86,400 cubic feet. A unit area on the hydrograph will represent a certain volume in thousand dsf. The total area of direct runoff for a storm is multiplied by the volume per unit area to provide the volume of the storm runoff in thousands of dsf.

In order to convert this volume into a depth of runoff from the basin, it is necessary to know the area of the basin in square miles. One inch of runoff from one square mile produces a volume of 26.9 dsf. Therefore:

$$\text{Storm Runoff (inches)} = \frac{\text{Storm Runoff (dsf)}}{26.9 \times \text{drainage area (mi}^2\text{)}}$$

The direct runoff converted to inches of depth over the basin is then used in developing the rainfall-runoff relation and in developing a unitgraph, which will be explained later.

At times it may be important to use total runoff, direct and groundwater, in the forecasting procedure. To evaluate total storm runoff, it is necessary to compute the volume of flow for a period beginning and ending with identical discharges, provided initial flow is all groundwater. The total flow from time E to time F in Figure 5 would represent total runoff.

Antecedent Precipitation Index (API)

As was indicated on page 6, a convenient means of approximating soil moisture is the use of an antecedent precipitation index such as the equation

$$I_1 = kI_0 + P \quad (4)$$

where I_1 is today's index, I_0 is yesterday's index, and k is a constant which varies with the basin characteristics. Rain which occurs during the intervening 24 hours P is added to the current index. The calculation for a 10-day period is shown in Figure 6.

The value of k must be determined by trial and error. Since this involves considerable work, it is customary to assume $k=0.90$ as a first approximation. No second approximation is usually undertaken unless there is a clear indication that this results in giving antecedent precipitation improper weighting. The use of a k of 0.90 is obviously convenient since the equation can then be expressed as:

$$I_1 = I_0 - (0.1) I_0 + P \quad (5)$$

and this is an extremely easy computation.

The value of the API is normally computed for the entire period of record that is to be analyzed. It is necessary, however, to start the index somewhere, and theoretically the value for any day depends on the precipitation for an indefinite period beforehand. Satisfactory results can be obtained by assuming an initial API value of 1.00 inches about two months before the first storm to be considered.

There remains the problem of whether this computation should be made for individual stations or for the average precipitation over a basin. This can be done either way, but it is very often done by individual stations in areas where the areal distribution of precipitation is quite variable. The problem of determining the mean value of the antecedent precipitation index can then be handled by the same procedure as was discussed for determining mean basin precipitation. This is not usually a critical computation and it is the usual practice to use a simple weighting procedure or to plot individual values on a map and make estimates

by inspection of the values for desired areas.

Since this is a process of accumulation, it is necessary to compute this index only at stations with reasonably complete records. Missing precipitation data should always be estimated before carrying the computation forward.

Storm Duration

Storm duration can be defined for short, uniform storms, but becomes quite complicated for long, drawn-out storms. One approach, when six-hourly precipitation amounts are available currently, is to take the sum of all six-hourly periods with .20 inch or more precipitation plus half the sum of intervening periods with less than .20 inches. This approach assumes that when .20 inch or more occurs in six hours, the effective duration is six hours; when less than .20 inch occurs, the effective duration is 3 hours. An example of this computation is shown in Table 1.

Season of Year

A convenient means of defining season is the use of the week of the year in which the storm begins. This is facilitated by the use of Table 2. A storm beginning on May 9 would be in the 19th week of the year.

COAXIAL GRAPHICAL CORRELATION ANALYSIS²

In the previous discussion, reasons were advanced for the selection of five variables to be included in the correlation - storm runoff, antecedent precipitation index, season or week of year, storm duration, and storm rainfall. Several numerical methods of correlation analysis have been programmed for solution on computers. The speed with which computations can be done makes practical the investigation of more parameters and many combinations of parameters. Thus, the best possible analysis of the available data can be determined and new conceptual approaches can be tried rapidly. It is advisable, however, for the student to start with graphical analysis in order to gain more complete understanding of each step in the problem. Too much of the interrelation between parameters is masked by the computer so that real understanding is difficult. Figure 7 shows the graphical correlation with storm runoff with week number as the intermediate variable. In chart B, computed values of storm runoff from chart A are correlated with storm duration to obtain a new computed value of storm runoff. This new value is further modified, in chart C, by correlation with storm precipitation to get the best computation of storm runoff that can be forecast with the five variables. Finally, in chart D, the computed values are plotted versus the observed values to show the reliability of the procedure. If use of the five variables could make perfect forecasts, all storms would plot on the 45° line in chart D. The quadrant arrangement

²R. K. Linsley, M. A. Kohler and J. L. Paulhus, "Hydrology for Engineers" or "Applied Hydrology", McGraw-Hill, 1958 and 1949, respectively.

used in Figure 7 is preferred because it avoids the possibility of forecasting either negative runoff or runoff in excess of rainfall. Also, in actual forecast use, chart A is needed only once at the beginning of each storm.

Derivation of Initial Curves

It is helpful to tabulate all the storm data before starting the analysis. The computed API for the day prior to each storm is used. Week number and duration values are found in the manner explained on page 14.

Graphical correlation can be started as soon as the tabulation is completed. Scales, such as are used in Figure 7, should be entered on a blank sheet of graph paper for each of the four quadrants A, B, C, and D. As a first approximation, chart B can be drawn with parallel 45° lines spaced about .25 inches apart per 24 hours of duration. Since the general shape of chart C is consistent from basin to basin, duplicate the lines in Figure 7-C to get an approximate relation which can be modified later. Proceed with developing the rainfall-runoff relation in the following manner:

1. For each storm, find the point in chart C which is defined by the storm's rainfall and runoff.
2. Trace this runoff value back through chart B to chart A. Plot a point on chart A corresponding to that runoff value and the API value for the pertinent storm. Label the point with week number.
3. Repeat steps 1 and 2 for each storm.
4. Draw lines that best fit the plotted data in chart A.

Refinement by Successive Approximation

Chart C can now be refined by using the newly drawn lines on chart A while performing the following steps:

1. Enter A with API and week number.
2. Proceed through B with duration.
3. Forecast the runoff and plot a new point in chart C with rainfall label.
4. Repeat 1 thru 3 for all storms.
5. Adjust the lines in chart C to fit the newly plotted data.

Chart B spacing can be refined at any time by entering the chart sequence from both ends, plotting new points and drawing new lines.

Chart A can now be refined by using the revised chart C to repeat the steps first used in preparing chart A.

This whole cut-and-try procedure can be reiterated as often as is required to define an accurate relationship. Chart D should be completed after each refinement so that the improvement can be evaluated. If a point is persistently anomalous on chart D, the original computation of all five variables for the storm should be checked for errors.

Examination of Figure 7 will show that the errors of the points with little runoff are considerably magnified when routed back through the chart sequence as described for the development of the second-approximation curves. Therefore, if this approach is used, it will be found that the curves can be more readily determined if low-runoff points are omitted in the original plotting.

Problems in Application

The runoff relation described above is derived on the basis of data for entire storms. In operational forecasting it is necessary to estimate runoff increments throughout the storm for application of the unit hydrograph or any other approach to the distribution of runoff. Mechanically this is accomplished by computing runoff for the accumulated rainfall for time increments required by the unit hydrograph, and obtaining runoff increments by the subtraction of successive total values. Since the relation was developed on data from entire storms, there is some question as to the validity of its use for forecasts of incremental runoff. With sufficient data, however, there should be storms whose totals approximate the subtotals from larger storms, and the relation works reasonably well for determining time distribution as well as total volume of runoff.

Earlier, it was suggested that storms with uneven areal distribution of rainfall should not be used in developing the forecasting procedure. It can be demonstrated that a storm with uniform areal distribution of rainfall will produce less runoff than a storm having the same average precipitation but with extremely uneven distribution. One solution is to compute runoff for each precipitation station rather than using the basin average. Runoff can then be averaged for the basin using the same procedure as described for rainfall. The same solution is also suggested when antecedent conditions vary widely throughout the basin.

It would be desirable to have a runoff relation in which it made no difference whether runoff was computed for an entire storm or the storm was broken into several increments and the runoff computed independently for each increment. The runoff procedure described here will not do this, primarily because it includes an initial loss which cannot be entirely compensated for by revision of the antecedent precipitation index. As a result there are times during a long, drawn-out storm when the problem arises as to whether the storm should be broken after a short break in the rainfall and a new runoff computation started using new antecedent conditions. Whenever there is a significant break in rainfall, handling the storm as one continuous event will result in a forecast of too much runoff. If the break is of less than two days' duration, treating it as two storms will probably produce forecasts of too little runoff. One solution is to compute runoff, treating it as one storm and then as two separate storms. The results are then weighted according to the length of the break in rainfall, assuming that a two-day break will give full effect to treating the event as two storms. In general, it is common practice to break the storm whenever a 24-hour

break in rainfall occurs in order to keep the computations from becoming too unwieldy.

When no records are available, about the only way to obtain a relation is to apply a procedure developed for an area assumed to have similar hydrologic characteristics. If a limited amount of data is available, it is also necessary to start with the procedure for a similar area, making only minor adjustments if they are required. Actually this procedure is usually followed even where adequate data are available since it is much simpler to modify an existing procedure that is reasonably appropriate than to develop an entirely new relation. When using a coaxial correlation, it may be practical to use the same rainfall quadrant (chart C in Fig. 7) for several basins, letting the season curves account for the differences in hydrologic characteristics from one area to the other.

Possibilities for Refinement of the Coaxial Graphical Correlation

The coaxial graphical correlation of rainfall to runoff, using antecedent precipitation index, season and duration as variables has proven to be a very practical and reasonably accurate means of estimating runoff. It has certain deficiencies, however, which should be recognized. Some of these deficiencies will be discussed and possible improvements suggested.

Use of Recharge in Place of Rainfall

The use of rainfall in computing an index to soil-moisture conditions, such as the antecedent precipitation index, has a recognizable flaw. That portion of the rainfall that runs off, leaves the basin rather quickly and has nothing to do with the moisture conditions of the basin. It is actually the recharge, precipitation less runoff, that effects the basin and it should be used to evaluate soil-moisture conditions. This involves a great deal of additional work in the use of the procedure, since the evaluation of total runoff cannot be made with absolute accuracy until most of the storm hydrograph is available. As a result, recharge is rarely used in place of precipitation for evaluating soil-moisture conditions.

Variation of Recession Coefficient

It is obvious that the rate of drying in a basin varies from one season to another. The use of a constant value of k in computing the antecedent precipitation index is, therefore, not entirely realistic. It might be better to vary this coefficient with season, making the value of k smaller in hot weather than in cold to reflect the faster drying conditions. This would be of particular importance if recharge were used in place of precipitation in computing the index. This adds additional complications in the development of the procedure and is not generally considered practical.

Use of Dual Recession Coefficients

Another possible solution would be the use of two values of k in separate API calculations. One value of k is made rather low, say $k=0.75$ to 0.85 , to represent rather short-range antecedent conditions. The second value of k is made quite high, $k=0.93$ to 0.99 , and reflects long-term variations in antecedent conditions. The use of the two-value API helps to correct deficiency of the relation for dry conditions.

ALTERNATE METHODS FOR ESTIMATING RUNOFF

The graphical correlation described on page 14 has proven an extremely useful and reliable forecast tool. There are, however, several other approaches with particular advantages for certain situations. A few of the more well-known methods are discussed here.

Use of Index Basins

Another system of predicting runoff is to take advantage of the short time of concentration in a small basin. The runoff from the small index basin is evaluated as soon as enough of the hydrograph is available. The data thus obtained can then be used to aid in forecasting for larger areas nearby which are slower in reaching their peaks. Often the crest stage of the index basin is correlated directly to basin runoff, thus enabling an estimate to be made as soon as the crest is observed at the index station. Since, in even a small basin, there is some lag between the end of heavy rain and the crest stage, this wastes valuable time that can be saved by estimating runoff directly from rainfall. In addition, there is also the problem of extrapolation of results in the index basin to fit the conditions in the area for which forecasts are desired. Adjustments can be made for differences in antecedent conditions, as well as storm precipitation, but they are usually of a subjective nature.

This procedure is to be recommended, however, in conjunction with conventional rainfall-runoff relations. Forecasts of runoff for the index basin can be compared to observed runoff and this information used to modify the runoff estimates for surrounding areas when necessary.

Initial Base Flow as an Index to Rainfall-Runoff

In humid areas where streams do not often go dry, groundwater discharge at the beginning of a storm is often used as an index to initial basin conditions. An example of such a relation is shown in Figure 9. This discharge reflects conditions throughout the entire area. Recent rains, particularly several small ones, can alter basin moisture deficiencies without appreciably affecting streamflow. This could be handled by adding a variable of weighted precipitation for the past several days.

In some areas it is found necessary to vary this relationship with season. A common method is to develop a relation for summer and another for winter. This leads to the inevitable problem of storm events that

occur between seasons. The usual solution is to make an estimate of runoff using each curve and then interpolate between these results.

The use of initial groundwater discharge as an index to runoff conditions is usually limited to small basins with rapid times of concentration. In larger areas during a rainy season one rise on the hydrograph tends to build on the last, making any satisfactory determination of initial groundwater discharge quite difficult. The usual approach is to determine initial groundwater discharge values for small index basins and apply them to other nearby areas having similar hydrologic characteristics.

Infiltration Approach

Many hydrologists consider the application of the infiltration theory to be the rational approach to the problem of estimating storm runoff. It is a rather direct approach and for studies of small, homogenous areas the method can often be used to advantage.

The infiltration capacity, f_p , was defined by Horton³ as the maximum rate at which a given soil in a given condition can absorb rain as it falls. The value of f_p , starting at a maximum of f_o , is found to decrease rapidly at first and then approach some minimum f_c . The value of f_c would depend upon the permeability of the subsoil. Horton suggested that the relation of f_p to the duration of rainfall t_r can be expressed by the equation:

$$f_p = f_c + (f_o - f_c)e^{-Kt_r} \quad (6)$$

where K is a positive constant and e is the Napierian base. While this equation was developed empirically, it can be derived by assuming the processes that reduce f_p from f_o to f_c are exhaustive. Some of the physical processes causing the reduction are increasing channel length and decreasing permeability with depth, packing of the surface by rainfall, clogging soil pores by fine particles washing into them by the rain, swelling of colloids in the soil and breaking down the crumb colloids in the soil and a breaking down of the crumb structure of the soil. It is assumed that the infiltration capacity is equal to the observed infiltration rate f_i only when rainfall intensity i equals or exceeds f_p .

The application of the infiltration approach to estimating runoff is quite direct. The surface runoff is that portion of the rainfall from a specific storm which is not disposed of by interception, depression storage, evapotranspiration during the storm, and infiltration. If all of these losses but infiltration are either very small or can be reasonably evaluated, the problem then becomes one of evaluating infiltration. Assuming Horton's equation is valid, that the values of f_o , f_c , K , and t_r

³ R.E. Horton and R. Van Vliet, "Determination of Areal Average Infiltration Capacity from Rainfall and Runoff Data", U.S. Department of Agriculture, Soil Conservation Service. 1940 (mimeo)

are known, and that rainfall intensity is always greater than infiltration capacity f_p - the solution is shown in Figure 10.

This approach is often applied in small homogenous areas for use in the design of hydraulic structures. Soil profile characteristics over even a small basin are so variable that use of a single infiltration curve is difficult. Areal variations in storm rainfall over a basin make analysis a time consuming and, at times, almost impossible job unless an extremely dense network of recording rain gages is available. In addition there is the complicating fact that this handles only the surface runoff portion of the storm runoff. Since interflow is generally regarded to be a significant percentage of direct runoff, it must also be estimated and added in preparing river forecasts. These difficulties in the application of the infiltration theory have resulted in the development of various less rigorous applications of the theory.

Use of indices in solution - The ϕ -index⁴ has been defined as the rate of rainfall above which the rainfall volume equals runoff volume. The area below the ϕ value in Figure 11 represents basin recharge and is a combination of infiltration, interception, and depression storage.

A slightly more complicated version is the use of the W-index which is the average infiltration rate during the period in which rainfall rate is greater than the capacity rate and can be expressed as

$$W = F/t = (P - Q - S)/t \quad (7)$$

where F is total infiltration, t is the time during which the rainfall rate exceeds the infiltration rate, P is the precipitation during time t, Q is surface runoff and S is surface retention. The W-index is about the same as the ϕ -index less the average surface retention.

In a specific past storm it is quite easy to derive the value of either the ϕ or the W-index from rainfall data and discharge records. The application of either of these indices to forecasting runoff requires that the index itself be forecast. Since these indices vary in a manner comparable to runoff, there is very little advantage to this approach in operation forecasting. In addition, the use of a constant rate tends to overestimate runoff early in the storm and underestimate it late in the storm. It should be noted, however, that this approach is of considerable value for design studies for situations where a minimum infiltration rate may be assumed.

Possibilities of Soil-Moisture Accounting

Soil-moisture deficiency is probably the most important factor involved in the relationship between rainfall and runoff. A practical means of estimating initial soil-moisture deficiencies for an area would

⁴ H. L. Cook, "The Infiltration Approach to the Calculation of Surface Runoff," Trans. Am. Geophys. Union, Vol. 27, pp. 726-747, October, 1946.

provide a very useful variable for inclusion in a procedure for correlating storm rainfall to resultant runoff. Instruments for measuring soil-moisture for a specific soil profile have become reasonably practical, but the wide variety of soil profiles and moisture conditions existing in even a small basin make point measurements of soil-moisture of questionable value for use in a rainfall-runoff relation.

A more promising approach is the use of some sort of areal accounting technique which results in soil-moisture values more appropriate to the entire area. In such an approach precipitation is the inflow, and total runoff leaving the area by way of the stream channels plus evapotranspiration into the atmosphere from soil and plant surfaces throughout the area make up the outflow.

The means of estimating the mean precipitation over the area is the usual problem of deriving spatial averages from point values. Runoff from the area can be determined from streamflow records. Here, the problem becomes one of matching flow to the particular storm which caused it and is discussed on page 9. The difference between rainfall and runoff is the water that remains in the area and is often referred to as recharge (R).

The third element, evapotranspiration, is the most difficult to evaluate. Most soil-moisture accounting techniques are based on the premise that actual evapotranspiration is either equivalent to the potential evapotranspiration rate (E) or bears a simple relation to potential evapotranspiration and soil-moisture deficiency.

A simple form of soil-moisture accounting is one in which the soil-profile is considered to have one capacity (S) over the entire area. Soil-moisture deficiency (d) is then determined by the equation:

$$d_{t+1} = d_t - R + E$$

where d_t is the soil-moisture deficiency at time t and d_{t+1} the value one time period later. R is the recharge and E the evapotranspiration which occurs between time t and t+1. The deficiency is allowed to vary between the limits of zero and S. It is possible to simplify this form of soil-moisture accounting by assuming the threshold approach. This assumes that all precipitation (P) is recharge (R) until the soil-moisture deficiency (S) is satisfied. After saturation is reached all the remaining precipitation is assumed to be runoff (Q_g). This eliminates the need for observed runoff values and permits soil-moisture computations to be made for any desired point or area.

A single value for soil-moisture capacity is not realistic, since even in small areas, there are differences in soil profiles and root structures which result in widely varying soil-moisture capacities. One solution is to assume the basin is made up of a range of soil-moisture capacities from S_1 to S_n . The threshold concept is applied to each of these assumed soil-moisture capacities in turn and for every rainfall

event a runoff value is computed (Q_1 to Q_n). Observed runoff for each storm event (Q) is then correlated to the computed runoff values using the equation:

$$Q = aP + b_1 Q_{S_2} \dots + b_n Q_{S_n}$$

where a and b_1 to b_n are constants that can be determined using multiple correlation techniques. In the term aP in this equation P represents precipitation and aP is included to allow for areas characteristically having total runoff. Water falling on river or lake surfaces or on impervious areas adjacent to a stream channel would fall in this category.

This approach can be modified in many ways. One possibility is to make the smallest capacity (S_1) variable with season. Another would be to vary the constants a and b_1 to b_n with season.

In this form, soil-moisture accounting makes no allowance for rainfall intensity. A proposed solution is the establishment of maximum hourly rates, assuming that any rainfall above this maximum rate would run off directly and would not be treated as part of the storm rainfall. Determination of this maximum hourly rate would be undertaken after rainfall-runoff relations were developed in order to explain forecast deviations for storms having high hourly rates.

DEVELOPMENT OF UNIT HYDROGRAPHS

After a satisfactory method of estimating runoff has been determined, it is necessary to know how the volume of water will be distributed in the hydrograph that will result at the forecast point. Runoff from the area near the forecast point will arrive soon after it occurs, while runoff from progressively more distant areas will have progressively longer travel time. Runoff from the uppermost portions of the drainage basin will arrive after the flood crest has passed. The crest itself will be caused by runoff from an area near the center of the basin that consists of many points with nearly simultaneous travel times. It can readily be seen that runoff from a long, narrow basin will produce a different hydrograph than the same amount of runoff would produce from a fan-shaped basin. Other factors such as the slope of the terrain will affect the time of concentration.

A common method of predicting the streamflow hydrograph after the runoff has been computed is through the use of the unit hydrograph. It is necessary to develop a unit hydrograph that will be tailored to fit uniquely each basin for which a forecast procedure is required. The following discussion will describe one of the methods of unit hydrograph development that can be accomplished manually.

The unit hydrograph is defined as the hydrograph of one inch of direct runoff from a storm of specified duration. For a storm of the same duration but with a different amount of runoff, the hydrograph of

direct runoff can be expected to have the same time base as the unitgraph. The ratio of the ordinates of flow for this hydrograph to the unit hydrograph ordinates will be equal to the runoff amount of the hydrograph in inches. The duration assigned to a storm used to develop a unit hydrograph should be the duration of runoff producing rainfall. The runoff duration can be determined by inspection of the hydrograph, and of the mass curve, which will be explained later.

Storm Selection

Storms selected for the development of a unit hydrograph should preferably contain at least .75 inch of runoff. The first step is to plot a discharge hydrograph for each storm using the stage hydrograph and converting stage readings to discharge in cubic feet per second (cfs) with the use of the rating curve. The Base Flow Separation line is then drawn so that the direct runoff can be computed as is explained on page 9. The ordinates used to determine the surface flow at specified periods should be spaced closely enough together so that their total value will be very close to the actual volume of the hydrograph used to represent the surface flow. The ordinate values in the unitgraph development illustration of Table 4 were taken 12 hours apart from Figure 12. Rises on small streams caused by short periods of runoff will be much sharper and have a considerably shorter time base. In that case, the ordinate spacing would also have to be shorter. Base flow in Table 4 was subtracted from the total flow in order to obtain the ordinates of direct runoff. The conversion of volume to inches of runoff necessarily took into account the fact that the ordinates were spaced 12 hours apart so that sum of ordinates must be divided by 2 to obtain dsf.

In addition to the volume requirements of storms selected, they should also be simple storms of reasonably uniform intensity and with the period of runoff near the desired unit duration time. A minor rise on the recession can be separated from the main storm, as is done in Figure 12. This should not be done if such a rise is caused by late inflow from a tributary, rather than from a short period of rainfall that occurred considerably after the period of precipitation being used in computations.

Mass Curves

The mass curve should be plotted on the same sheet that is used for the storm hydrograph being studied. The method of plotting the mass curve in Figure 12 is optional and was used in this case to separate the mass curve and hydrograph to avoid confusion. If data are available from a recording rain gage, the amounts taken at 2-hour intervals should be accumulated and plotted on the depth versus time scale. If only longer time interval readings are available, they will have to be accumulated and adjusted to fit all information that is known with regard to beginnings, endings or changes in rate of rainfall. Observer's notes are good sources for this type of information. If mass curves for several reporting stations are plotted on one chart, an average curve for the basin should be drawn.

The duration of a storm is measured from the time the hydrograph begins to rise above base flow until storm rainfall ends (See Fig. 12).

Development

At this stage all the basic data has been reduced to a form that is convenient for the final development of the unit hydrograph. River stage readings have been converted to discharge and plotted on graph paper (See Fig. 12). The base flow separation has been made and the duration time has been determined from the mass curve. The total volume of direct runoff has been found by measuring the area between the base flow separation line and the hydrograph and this volume has been converted to inches of runoff from the basin.

Now the ordinate values of the direct runoff in cfs should each be divided by the total direct runoff in inches. Computations based on Figure 12 are shown in Table 4.

The results are the ordinates of the desired unitgraph. The duration time is 12 hours and the unit amount is one inch as required by the definition of a unitgraph. A unit hydrograph derived from a single storm may be in error, so it is desirable to average the unit hydrographs derived from several storms of the same duration. However, this averaging process should be done graphically since an arithmetic average of concurrent coordinates will yield an average peak lower than many of the individual peaks. All of the derived unit hydrographs should be plotted on one sheet of paper. Then an average peak should be visually selected with due consideration to both the height of the peak and the timing of it. The average unit hydrograph is then sketched to conform to the general shape of the other graphs passing through the point selected for the average peak. It should be adjusted so that its ordinates represent a volume equal to 1 inch of runoff.

Unitgraph Conversion

It is sometimes desirable to change the duration time of the unit hydrograph. For example, one may have developed the unit hydrograph from an ideal storm, during which the runoff lasted only 12 hours. If a 24-hour hydrograph is desired, one would add together the unitgraphs for two 12-hour periods after lagging the second one by 12 hours. To illustrate we will convert the 12-hour unit hydrograph developed in Table 4 to a 24-hour unit hydrograph in the following manner:

.2	1.1	3.6	7.2	5.8	2.4	1.1	.1	
	.2	1.1	3.6	7.2	5.8	2.4	1.1	.1
.2	1.3	4.7	10.8	13.0	8.2	3.5	1.2	.1

The resulting sums are the ordinates of a hydrograph for 2 inches of runoff occurring over a 24-hour time period. In order to convert this into a unit hydrograph with a duration time of 24 hours, divide each of the ordinates by 2 so that a volume equal to one inch of runoff is restored.

The S curve shown in Figure 9-7 of "Hydrology for Engineers" by Linsley, Kohler, and Paulhus is used to convert unit hydrographs to shorter durations when this is desirable.

STREAMFLOW ROUTING

It is necessary to forecast points on streams which are downstream from the headwater forecast points or from reservoirs. In some cases lead time is short and forecasts must be made from forecasts of upstream flow at a headwater point. At points farther downstream, it is usually necessary to issue a preliminary crest forecast from upstream forecasts, but the final forecast is usually based on observed upstream crests.

A flood wave changes shape as it moves downstream. The rising side of the wave is steeper than the recession side, and hence moves faster. This effect plus channel storage and other factors causes the wave to flatten out as it proceeds downstream. The degree of flattening and the shape of the hydrograph are determined by relatively stable channel characteristics. Thus the relationship of hydrograph shape at some point to hydrograph shape downstream from this point can be determined by analysis of past floods. Forecasting the changing shape of the wave is known as flood or stream flow routing.

Crest Stage Relations

A method of determining whether stage relations will provide good forecasts is to plot on graph paper upstream versus downstream crest stage data from numerous storms of record. If the points fall on or very near a smooth curve, it is very likely that this crest relation is a reliable forecast tool (See Fig. 13). Simultaneous stages during periods of low steady flow can be used for the lower end of the curve. For higher storm flows only the crests at each point should be used. The travel time of the crest from the upper gage to the lower should be entered for each point on the graph so that one can see if this time varies with stage height. If the first plotting shows an unacceptable scatter of points, it may be possible to introduce another parameter (such as the crest on a large representative tributary) into a more complex stage relation. It is necessary to be alert for changes such as channel improvement or new reservoirs which may have changed the relation. As the complexity increases there is more incentive to use a routing technique.

Crest stage relations are used almost entirely to obtain forecasts at points intermediate to key forecast points and provide a crest and time of crest. Forecasts of the entire hydrograph are usually made at key forecast points with the use of streamflow routing, which is described next.

Routing

Routing techniques are described in the literature. A graphical method that is adequate in most forecast situations is described here in order to convey some basic knowledge of the problem. This method deals with the time lag that inflow at the upstream point(s) experiences before it becomes outflow at the downstream point. It also deals with the storage (K) that occurs within the reach between forecast points. Thus, this graphical method makes use of two factors called K and Lag.

K is a storage coefficient which, when it is multiplied times the change in outflow (dO) with the change in time (dt) gives the change in storage (dS) with change in time (dt). The formula reads:

$$K \frac{dO}{dt} = \frac{dS}{dt}$$

$\frac{dS}{dt}$ is equal to inflow minus outflow or I-O. Hence, the formula can be rewritten as:

$$K \frac{dO}{dt} = I-O \quad \text{or} \quad \frac{I-O}{K} = \frac{dO}{dt}$$

L is the lag time. It is found as follows:

1. Plot the inflow and outflow hydrographs in Figure 14a.
2. Note the time difference in hours between A and B which is L.

The lag is used in this type of stream flow routing because the peak of the outflow hydrograph must fall on the receding limb of the inflow hydrograph as shown in Figure 14b.

To find K, lag the inflow hydrograph L hours as is shown in Figure 14b. The following steps, illustrated in Figure 14c, define K as a function of outflow at points along the outflow curve:

1. Select point A on the rising side of the inflow hydrograph.
2. Draw a vertical line downward through point A to a point, B, on the outflow hydrograph
3. Draw a horizontal line through point A to the right.
4. From point B, draw a line tangent to the outflow hydrograph, upward until it hits the horizontal line at a point, C.
5. The time in hours from A to C is the value of K for the value of outflow at point B.
6. A similar construction can be performed for several points on rising and falling limbs.

After computing K for several points along the outflow hydrograph, one can construct a curve to show how K varies with outflow as has been done in Figure 14d. In order to find values for the L curve in Figure 14d, one must look at several historic floods of different magnitudes. Along some reaches L may be constant for all inflows: K and L curves should be convenient to or plotted on hydrographs that will be used as forecast work sheets.

After K and L have been established for a reach, inflow values and the initial outflow value are the only information that is needed to forecast the outflow hydrograph. It may be necessary to combine inflows from several tributaries or reservoirs into one common inflow before proceeding. The following example of routing is shown in Figure 15a:

1. The inflow should be lagged L hours and plotted on hydrograph paper. (Forecast inflow can also be lagged and plotted if needed for timely forecasts, but it should be clearly marked as such and revised as observed values become available.)
2. A point is plotted K hours from I_2 with the same flow value.*
3. A straight edge from this point to O_1 gives the slope at O_2 .
4. A short segment of the outflow hydrograph should be drawn at time O_2 .
5. This procedure is repeated as often as necessary to adequately describe the outflow hydrograph.
6. The lagged inflow and graphically derived outflow for an entire storm is shown in Figure 15b.

OPERATIONAL PROBLEMS IN RIVER FORECASTING

Collection of Basic Data

Successful operation of a river forecasting service can be made possible only by the availability of adequate basic data. This includes the historical data required for the development of forecast procedures and a basic network of current reporting stations to support forecasting operations. The need for historical data in the development of rainfall-runoff relations was covered on page 9 and this discussion will be confined to operational requirements.

Network Design

Preparation of timely and accurate river forecasts requires timely and accurate information about hydrologic conditions in the drainage areas involved. This includes enough rainfall reports to adequately define the areal precipitation pattern and enough hourly or six-hourly information to make a reasonable time distribution of the rainfall. The density of rainfall reports required to evaluate the areal pattern will vary with the type of precipitation which produces floods. Areas subject to thunderstorm type precipitation require a greater density than those with relatively uniform precipitation patterns. A distance of 20-25 miles between rain gages is usually satisfactory for all but thunderstorms. For thunderstorms it is almost impossible to maintain a network dense enough to adequately define the areal precipitation pattern. Radar offers a means for dealing with high intensity storms covering a small area. Radar information can be used with observed rainfall information to construct isohyetal patterns of great value in estimating mean basin precipitation.

*If K is variable, it is necessary to cut and try. The segment plotted should be at an outflow corresponding to K value used.

In areas where there are no observers or reliable communications facilities, it may be necessary to use automatic equipment to obtain reports. Gages are now available that automatically measure precipitation or river stage and transmit it by radio to the collection point. This equipment can be programmed to report at regular time intervals, using built-in timing devices. Another solution is to construct the equipment to report whenever an activating signal is sent from the collection point, but this requires both a sending and receiving radio set at each gage.

The river gage network required is dictated primarily by the area for which forecasts are needed and where records are available for use in the development of procedures. Streamflow records are often lacking for some locations that require river forecasts. When this is the case it may be necessary to prepare the basic forecast for a nearby rated station and use an auxiliary relation to forecast for the location in question.

Reporting Procedures

Hydrologic data is of no use in forecasting unless it is collected regularly and reaches the forecaster promptly.

(1) Rainfall reports - It is the usual practice to have a few rainfall observers report daily. These reports form a basic network which is supplemented by additional data during rainy periods. These added reports are obtained whenever some predetermined criterion occurs. This criterion may be a fixed amount of rain in a given time interval and may vary with the season of the year.

Once the reporting criterion has been reached, the observer reports at regular intervals until the storm is over. It is desirable to have the observer report one period of no rain at the end of the storm before terminating his report to verify that the storm has ended.

The interval at which the observer reports rainfall is a function of the time of concentration of the area involved and how critical the flood problem is. In most cases, reports are required at six hour intervals - morning, noon, and evening. It is usually not practical to attempt to collect reports during the night unless flood emergency is particularly critical. In some downstream areas, twelve-hour reports are adequate and in some cases reports can be collected once a day. An area subject to flash flooding will probably require a specially designed network with some means of getting data more often, sometimes as frequently as once an hour.

(2) River reports - River observers are instructed to report on the same basis as rainfall observers. A few key stations should report every day. The remainder of the network is usually set up to start reporting whenever the stage reaches a specified value and to continue to report at a predetermined interval until the stage goes below the specified

value. Here, too, it is desirable to have the observer make one report after the stage falls below the specified criterion value.

The reporting interval is determined in the same way as was described for rainfall observers.

Observed discharge data from dams along the river are usually furnished by the agency operating the structure along with anticipated changes in discharge. Close coordination is required because a decision on how to operate the dam depends upon forecasts of inflow into the reservoir.

In the case of both rainfall and river observers, it is the usual practice to require them to make daily readings even though they are below reporting criteria and to mail these data to the river forecast office. This will enable them to keep tract of current river and antecedent precipitation conditions.

(3) Other hydrologic information - Additional, more specialized data may be required at certain times and places such as depth of frost in the soil, soil moisture, evaporation, wind, and temperature. Such data are usually obtained from the most convenient source with special arrangements to fit each case.

(4) Rainfall data at night - It was mentioned earlier that it is difficult to obtain rainfall reports with any regularity at night. In areas where dangerous flood conditions can develop during the night, it is often necessary to make special arrangements to obtain a skeleton network of rainfall reports at any time. Utility plants, police stations, fire stations, or other stations which work around the clock are possible sources of this information. Remote reading gages may be used to facilitate this. These gages have their collectors mounted on the roof. A tube leads from the collector down to a measuring tube located at some convenient spot in the building, making it easy for an observer to obtain readings whenever they are requested. One problem is to be sure the gage is emptied regularly. It is best to have the gage read daily at a certain hour and emptied only then.

Methods of Preparing Forecasts

The steps taken to prepare a river forecast are illustrated here by a simple example. A hypothetical river basin is shown in Figure 16 in which river forecasts are required for Stations A and B. Unit hydrographs⁵ are utilized for the distribution of runoff and the K and L routing technique is used.

⁵ L. K. Sherman, "Streamflow from Rainfall by the Unit-graph Method," Eng. News-Record, Vol. 108, pp. 501-505, 1932.

It is assumed that a storm began at about 7:00 pm on May 17 and that a forecast is being prepared on the basis of rainfall reported up to 7:00 am on May 19.

The computation of runoff is shown in Table 5. The antecedent precipitation index (API) for 7:00 am May 17 is used. This is the value for the first day of the storm but it does not include any storm rainfall. The week of the year is determined by the date of the beginning of the storm, May 17, which falls in week 20 (Table 2). The average rainfall amounts above Station A and between Stations A and B for 12-hour increments are entered in line 5 and 14. (The same rainfall-runoff relation is used for each basin in this example. In actual practice, separate relations should be developed and used for each basin.)

Dashed lines on the runoff relation (Fig. 8) indicate the computation of runoff for the area above Station A for 7:00 am on May 18 as follows:

1. Enter the relation with the API (2.65).
2. Move left to the week of the year (20), down to storm duration (12).
3. Move to the right to storm precipitation (1.02).
4. Move up to obtain storm runoff (.38).
5. This process is repeated at the end of each 12-hour period using precipitation accumulated to that time.
6. The 12-hour increments of runoff (Table 5, lines 9 & 18) are determined by subtracting the previous storm runoff total from the storm runoff total at the time in question and are entered in lines 1 and 11 of the forecast sheet (Table 6).
7. The 12-hour runoff increments are converted to discharge using the 12-hour unit hydrograph for Station A (Table 7).
8. Each 12-hour ordinate of the unit hydrograph is obtained for the first runoff increment (.38 inch) by interpolation and entered in line 2 of Table 6, with the first value in the same column as the runoff increment (this is the ending time of the 12-hour period when the runoff occurred).
9. This process is repeated on lines 3 and 4 for the other increments of runoff and the total for each time entered in line 6.
10. Baseflow (line 7) includes all flow from events preceding the storm.
11. The "computed" forecast, the sum of total runoff (line 6) and baseflow (line 7), is entered on line 8.
12. These values are plotted (as crosses) on the hydrograph (Fig. 17).

This "computed" forecast is the unadjusted result of the forecast procedures, and the forecaster must then draw an "adjusted" forecast reconciling the "computed" forecast with available observed data. The "adjusted" forecast is shown as a solid line when based on observed values and as a dashed line in the forecast period. The "adjusted" values are entered in line 9 for routing to Station B.

The final step in preparing the forecast is the conversion of forecast discharge to stage using the rating curves (Fig. 18). The forecast for Station A could be given as "crest of 23 ft. at 11 pm on May 19" or as "crest of 23 to 24 ft. near midnight." Giving a specific figure, such as 23 ft. may give the impression to the recipient of the forecast that is likely to vary within 1/10 foot, which may not be the case.

The "adjusted" flows for Station A (line 9) are routed to Station B using the K and L method by proceeding through the steps listed at the end of section, "Streamflow Routing." The values $L = 4$ and $K = 16$ were used in this example. A dotted line in Figure 19 is used to indicate this forecast.

The forecast of flow from the local area is made in the same manner as for Station A using the unitgraph in Table 8. The "computed" forecast is the sum of the routed value (line 10, Table 6), the total runoff (line 16, and the baseflow (line 17). These values are plotted on the hydrograph and "adjusted" on the basis of observed data (Fig. 19). Convert to stage with Figure 18.

The forecast for Station B might be given as "crest of 36 ft. at 2 am on May 20" or as "crest of 35 to 36 ft. early on May 20." It is a good practice to maintain a record of these forecasts on a tabulation sheet such as Table 9 in order to minimize the chance of errors in transmitting the forecast to the user.

Computing Runoff From Melting Snow

The estimation of runoff is sometimes complicated by snowmelt. When heavy rain occurs on a relatively light snow cover, the water equivalent of the snow is added to the rainfall and the total used in computing runoff. This assumes the snow will be completely melted during the rain.

When rain falls on deeper snow packs the problem becomes much more complicated. Part of the snow may melt and become a part of the total runoff. Part of the rain may be absorbed and retained by the snow pack so that this rain does not contribute to runoff. In mountainous areas this situation is harder to define if the freezing level is changing during the storm. Much more research and instrumentation is needed before completely objective forecasts can be made under such conditions.

Another problem arises when runoff is primarily a result of the snowmelt alone. Snowmelt rates depend upon many meteorological elements such as temperature, humidity, wind and radiation. In addition the albedo of snow on the ground and water equivalent of snow must be considered. This is a complicated problem which cannot be treated thoroughly here. A common solution is to compute melt by multiplying the average of the degree-days above 32°F for the area by a factor which usually varies from .05 to .15 inch with .10 inch probably the most commonly used value. This degree-day factor is often correlated with calendar date or accumulated degree-days as is shown in Figure 20. This obviously does not take into account

many of the factors influencing melt, but does produce usable estimates of runoff. Further refinements require observations of meteorological elements such as humidity, radiation and wind that are usually not available in the area requiring forecasts. It should be noted that the relation shown in Figure 20 estimates snowmelt as such, and it is necessary to use a rainfall-runoff relation to compute runoff for use in forecasting.

Flash Flood Warning Procedures

At points where there is a very short time between the end of heavy rain and the peak stage, it is often necessary to use special short cut procedures in place of the conventional approach described earlier in this section. Table 10 shows a type of procedure commonly used. These tables were based on a conventional rainfall-runoff relation and unit hydrograph. The table is intended for use by a flood warning representative in the city subject to flash flooding. The "index" is given to the representative regularly and represents current runoff conditions in the area.

Warning procedures can take many forms, depending upon available data for development and many other factors. In general the procedures will be used by a warning representative with a limited knowledge of hydrology. Simplicity is more important than extreme accuracy.

For example, a local flash-flood representative has been given a Runoff Index of 4 by the river forecasting office. At 4 pm, rainfall observers report rainfall of 4.30 inches in the preceding 6 hours. The duration is 6 hours so the left side of Table 10 applies as follows:

1. Move down the runoff index column to the current value (4).
2. Move to the left and interpolate between 3.85 inches (21 ft.) and 4.60 inches (24 ft.).
3. This gives a forecast of a crest stage of 22.8 ft. The table indicates the crest for a 6-hour rain will occur 7 hours after the end of heavy rain - at 11 pm.
4. The forecast issued might read - "crest stage of 22 to 23 ft. late this evening."

Table 1. -- Computation of storm duration

Date	4	4	4	5	5	5
Hour	12	18	24	6	12	18
6-hour Rainfall in Inches	.62	.40	.14	.24	.09	.22
Estimated Storm Duration in Hours	6	12	15	21	24	30

(Table 1 is referred to on Page 14.)

Table 2. -- Week number

Date	Week No.	Date	Week No.
Jan. 1- 7	1	July 2- 8	27
8-14	2	9-15	28
15-21	3	16-22	29
22-28	4	23-29	30
29- 4	5	30- 5	31
Feb. 5-11	6	Aug. 6-12	32
12-18	7	13-19	33
19-25	8	20-26	34
26- 4	9	27- 2	35
Mar. 5-11	10	Sept. 3- 9	36
12-18	11	10-16	37
19-25	12	17-23	38
26- 1	13	24-30	39
Apr. 2- 8	14	Oct. 1- 7	40
9-15	15	8-14	41
16-22	16	15-21	42
23-29	17	22-28	43
30- 6	18	29- 4	44
May 7-13	19	Nov. 5-11	45
14-20	20	12-18	46
21-27	21	19-25	47
28- 3	22	26- 2	48
June 4-10	23	Dec. 3- 9	49
11-17	24	10-16	50
18-24	25	17-23	51
25- 1	26	24-31	52

(Table 2 is referred to on Pages 14 and 30.)

Table 3. -- Rating table

Stage	.0	.1	.2	.3	.4	.5	.6	.7	.8	.9
	DISCHARGE $\frac{\text{cfs}}{1000}$									
4	.8	.9	1.0	1.2	1.3	1.4	1.5	1.6	1.8	1.9
5	2.0	2.2	2.4	2.6	2.8	3.0	3.1	3.3	3.5	3.7
6	3.9	4.1	4.3	4.6	4.8	5.0	5.2	5.4	5.7	5.9
7	6.1	6.4	6.6	6.7	7.2	7.5	7.7	8.0	8.3	8.5
8	8.8	9.1	9.4	9.6	9.9	10.2	10.5	10.8	11.0	11.3
9	11.6	11.9	12.2	12.5	12.8	13.1	13.4	13.7	14.0	14.3
10	14.6	14.9	15.3	15.6	16.0	16.3	16.6	17.0	17.3	17.7
11	18.0	18.4	18.8	19.1	19.5	19.9	20.3	20.7	21.0	21.4
12	21.8	22.2	22.7	23.1	23.6	24.0	24.4	24.9	25.3	25.8
13	26.2	26.6	27.1	27.5	28.0	28.4	28.8	29.3	29.7	30.2
14	30.6	31.1	31.6	32.2	32.7	33.2	33.7	34.2	34.8	35.3
15	35.8	36.3	36.8	37.3	37.8	38.4	38.9	39.4	39.9	40.4
16	40.9	41.5	42.0	42.6	43.1	43.7	44.2	44.8	45.3	45.9
17	46.4	47.0	47.6	48.2	48.8	49.4	49.9	50.5	51.1	51.7
18	52.3	52.9	53.5	54.1	54.7	55.4	56.0	56.6	57.2	57.8
19	58.4	*59.1	59.9	60.6	61.4	62.1	62.8	63.6	64.3	65.1
* BEGINNING OF EXTRAPOLATED DATA										
20	65.8	66.6	67.5	68.3	69.2	70.0	70.8	71.7	72.5	73.4
21	74.2	75.0	75.8	76.5	77.3	78.1	78.9	79.7	80.4	81.2
22	82.0	83.7	85.4	87.1	88.8	90.5	92.2	93.9	95.6	97.3
23	99.0									

(Table 3 is referred to on Page 11.)

Table 4. -- Unitgraph development (see Fig. 12)

A. DATE	<u>3</u>	<u>4</u>		<u>5</u>		<u>6</u>		<u>7</u>
B. TIME	12	00	12	00	12	00	12	00
C. TOTAL FLOW ORDINATE (1000 cfs)	2.7	5.8	14.3	27.0	23.0	12.4	9.1	6.7
D. BASE FLOW ORDINATE (1000 cfs)	2.0	2.0	2.0	2.0	2.8	4.0	5.3	6.4
E. DIRECT RUNOFF ORDINATE (1000 cfs)	.7	3.8	12.3	25.0	20.2	8.4	3.8	.3

1 square mile = 27,878,400 ft.²

for 1 inch depth $\frac{27,878,400}{12} = 2,323,200 \text{ ft.}^3$
over 1 square mile

$\frac{1 \text{ cu. ft.}}{\text{sec.}} \times \frac{86,400 \text{ sec.}}{\text{day}} = 86,400 \text{ ft}^3 = 1 \text{ dsf}$

$\frac{2,323,200}{86400} = 26.9 \text{ dsf}$

Therefore 1 inch of runoff from 1 square mile produces 26.9 dsf.

IN THIS STORM SUM OF 12-HOUR ORDINATES = 74,500 cfs

$\frac{74500}{2} = 37,250 \text{ dsf}$

Storm runoff = $\frac{37,250 \text{ dsf}}{26.9 \times 400 \text{ mi}^2} = 3.46 \text{ inches}$

DERIVED UNITGRAPH ORDINATES (each direct runoff ordinate was divided by total storm runoff)

	.2	1.1	3.6	7.2	5.8	2.4	1.1	.1
--	----	-----	-----	-----	-----	-----	-----	----

(Table 4 is referred to on Pages 23 and 24)

Table 5. -- Computation of storm runoff

Month.....	May.....	Year....	Date Hour	16		17		18		19	
				7a	7p	7a	7p	7a	7p	7a	7p
Drainage Area Above A	1	0.9 of yesterday's API.....		2.95		2.65					
	2	Precipitation in past 24 hours..		0		0					
	3	API for today.....		2.95		2.65					
	4	Week of year.....				20					
	5	12 hour precip increment (in.)..						1.02	.67	1.71	
	6	Total storm precipitation (in.).						1.02	1.69	3.40	
	7	Durations (hours).....						12	24	36	
	8	Total storm runoff (in.).....						.38	.76	1.90	
	9	12 hour runoff increments (in.).						.38	.38	1.14	
Drainage Area Between A and B	10	0.9 of yesterday's API.....		3.56		3.20					
	11	Precipitation in past 24 hours..		0		0					
	12	API for today.....		3.56		3.20					
	13	Week of year.....				20					
	14	12 hour precip increments (in.).						.91	.58	1.71	
	15	Total storm precipitation (in.).						.91	1.49	3.20	
	16	Duration (hours).....						12	24	36	
	17	Total storm runoff (in.).....						.36	.64	1.86	
	18	12 hour runoff increments (in.).						.36	.28	1.22	

(Table 5 is referred to on Page 30.)

Table 6. -- Forecast Computation sheet

STATION A	17		18		19		20		21		22		23	
	7a	7p	7a	7p	7a	7p	7a	7p	7a	7p	7a	7p	7a	7p
1 Fcst 12-hr RO(in.)			.38	.38	1.14									
2 Distribution of RO (1000 cfs)			.7	1.5	1.9	1.3	.8	.4	.2	.1				
3 ""				.7	1.5	1.9	1.3	.8	.4	.2	.1			
4 ""					2.1	4.6	5.6	4.0	2.4	1.3	.7	.2	.1	
*5 ""														
6 Total (line 2+3+4)			.7	2.2	5.5	7.8	7.7	5.2	3.0	1.6	.8	.2	.1	
7 Base flow	1.2	1.1	1.0	.9	.8	.8	.9	1.0	1.2	1.4	1.5	1.5	1.5	
8 "Computed" Fcst (1000cfs)	1.2	1.1	1.7	3.1	6.3	8.6	8.6	6.2	4.2	3.0	2.3	1.7	1.6	
(line 6+7)														
9 "Adjusted" Fcst (1000cfs)	1.2	1.1	1.8	3.6	7.5	10.4	9.7	7.1	4.5	3.0	2.3	1.7	1.6	
10 A routed to B	4.0	3.0	2.5	2.5	4.1	6.4	8.4	8.3	7.3	5.5	4.2	3.1	2.5	
STATION B														
11 Fcst 12-hr RO(in.)			.36	.28	1.22									
12 Distribution of RO (1000 cfs)			1.4	2.4	2.3	1.3	.6	.2						
13 ""				1.1	1.9	1.8	1.0	.5	.2					
14 ""					4.9	8.2	7.9	4.4	2.1	.7	.1			
*15 ""														
16 Total (line 12+13+14)			1.4	3.5	9.1	11.3	9.5	5.1	2.3	.7	.1			
17 Base flow	.9	.8	.8	.7	.7	.7	.9	1.1	1.3	1.4	1.5	1.5	1.5	
18 "Computed" Fcst (1000cfs)	4.9	3.8	4.7	6.7	13.9	18.4	18.6	14.5	10.9	7.6	5.8	4.6	4.0	
(line 10+16+17)														
19 "Adjusted" Fcst (1000cfs)	4.9	3.8	4.4	6.4	13.0	17.3	17.6	14.0	10.5	7.6	5.8	4.6	4.0	

* Lines 5 and 15 are reserved for the next forecast period.

(Table 6 is referred to on Page 30 and 31)

Table 7. -- Station A 12-hour unitgraph

Flow (1000 cfs) at end of:

Hours:	12	24	36	48	60	72	84	96	108
Runoff									
.05	.1	.2	.2	.2	.1	.1			
.10	.2	.4	.5	.4	.2	.1	.1		
.15	.3	.6	.8	.5	.3	.2	.1		
.20	.4	.8	1.0	.6	.4	.2	.1		
.25	.5	1.0	1.2	.9	.5	.3	.2	.1	
.30	.6	1.2	1.5	1.1	.6	.3	.2	.1	
.35	.7	1.4	1.7	1.2	.7	.4	.2	.1	
.40	.8	1.6	2.0	1.4	.8	.4	.2	.1	
.45	.9	1.8	2.2	1.6	.9	.5	.3	.1	
.50	1.0	2.0	2.5	1.8	1.0	.6	.3	.1	.1
.55	1.1	2.2	2.7	2.0	1.1	.7	.3	.1	.1
.60	1.1	2.4	2.9	2.1	1.3	.7	.4	.1	.1
.65	1.2	2.6	3.2	2.3	1.4	.7	.4	.1	.1
.70	1.3	2.8	3.4	2.5	1.5	.8	.4	.1	.1
.75	1.4	3.0	3.7	2.6	1.6	.8	.5	.2	.1
.80	1.5	3.2	3.9	2.8	1.7	.9	.5	.2	.1
.85	1.6	3.4	4.2	3.0	1.8	.9	.5	.2	.1
.90	1.7	3.6	4.4	3.2	1.9	1.0	.5	.2	.1
.95	1.8	3.8	4.7	3.3	2.0	1.0	.6	.2	.1
1.00	1.9	4.0	4.9	3.5	2.1	1.1	.6	.2	.1
1.25	2.4	5.0	6.1	4.4	2.6	1.3	.8	.3	.1
1.50	2.9	6.0	7.4	5.3	3.2	1.7	.9	.3	.2
1.75	3.3	7.0	8.6	6.1	3.7	1.9	1.1	.4	.2
2.00	3.8	8.0	9.8	7.0	4.2	2.2	1.2	.4	.2
3.00	5.7	12.0	14.7	10.5	6.3	3.3	1.8	.6	.3

(Table 7 is referred to on Page 30.)

Table 8. -- Station B local area 12-hour unitgraph

Flow (1000 cfs) at end of:

Hours:	12	24	36	48	60	72	84
<u>Runoff</u>							
.05	.2	.3	.3	.2	.1		
.10	.4	.7	.7	.4	.2	.1	
.15	.6	1.0	1.0	.5	.3	.1	
.20	.8	1.3	1.3	.7	.3	.1	
.25	1.0	1.7	1.6	.9	.4	.2	
.30	1.2	2.0	2.0	1.1	.5	.2	
.35	1.4	2.3	2.3	1.3	.6	.2	
.40	1.6	2.7	2.6	1.4	.7	.2	
.45	1.8	3.0	2.9	1.6	.8	.3	
.50	2.0	3.4	3.2	1.8	.8	.3	.1
.55	2.2	3.7	3.6	2.0	.9	.3	.1
.60	2.4	4.0	3.9	2.2	1.0	.4	.1
.65	2.6	4.4	4.2	2.3	1.1	.4	.1
.70	2.8	4.7	4.6	2.5	1.2	.4	.1
.75	3.0	5.0	4.8	2.7	1.3	.5	.1
.80	3.2	5.4	5.2	2.9	1.4	.5	.1
.85	3.4	5.7	5.5	3.1	1.4	.5	.1
.90	3.6	6.0	5.9	3.2	1.5	.5	.1
.95	3.8	6.4	6.2	3.4	1.6	.6	.1
1.00	4.0	6.7	6.5	3.6	1.7	.6	.1
1.25	5.0	8.4	8.1	4.5	2.1	.8	.1
1.50	6.0	10.1	9.8	5.4	2.6	.9	.2
1.75	7.0	11.7	11.4	6.3	3.0	1.1	.2
2.00	8.0	13.4	13.0	7.2	3.4	1.2	.2
3.00	12.0	20.1	19.5	10.8	5.1	1.8	.3

(Table 8 is referred to on Page 31.)

Table 9 -- Forecast record sheet

Forecast Point	Forecast				Time forecast issued				Latest stage available when fcst prepared			Based on precip up to		Remarks
	Crest	Hour	Date	By	Hour	Date	By	Stage	Hour	Date	Hour	Date		
1 Station A	23	11 pm	19	MR	9 am	19	MR	21.5	7 am	19	7 am	19		
2 Station B	36	2 am	20	MR	9 am	19	MR	31.4	7 am	19	7 am	19		
3														

(Table 9 is referred to on Page 31.)

Table 10. -- Flash-flood warning procedure

Precipitation (in.)	Duration of heavy rain -- 6 hours				* Runoff index	Duration of heavy rain -- 12 hours			
	Time to crest after end of heavy rain -- 7 hours.					Time to crest after end of heavy rain -- 5 hours			
	Crest stage in ft.					Crest stage in ft.			
	18	21	24	27		18	21	24	27
	2.80	3.40	4.15	4.75		1	3.30	4.00	4.50
2.95	3.55	4.30	5.00	2	3.45	4.15	4.70	5.60	
3.10	3.70	4.45	5.20	3	3.60	4.30	4.90	5.80	
3.25	3.85	4.60	5.40	4	3.75	4.45	5.10	6.00	
3.40	4.00	4.75	5.60	5	3.90	4.60	5.30	6.20	
3.55	4.15	5.00	5.80	6	4.05	4.75	5.50	6.40	

* Provided by the responsible river forecast office.

(Table 10 is referred to on page 32.)

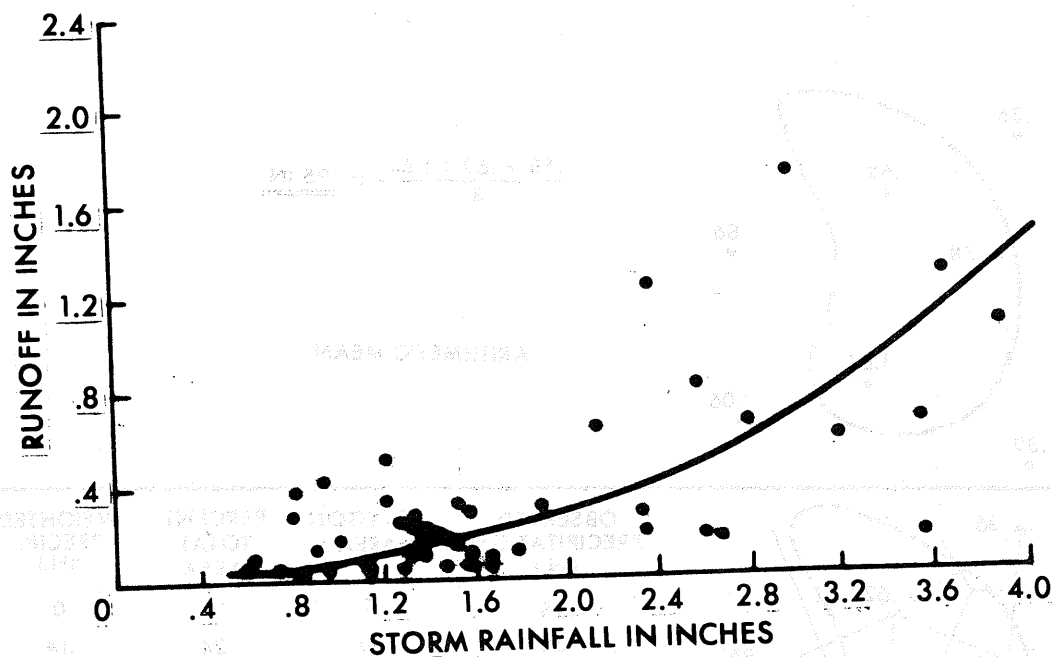


FIGURE 1.--Rainfall-Runoff relation for White Oak Bayou at Houston, Texas.


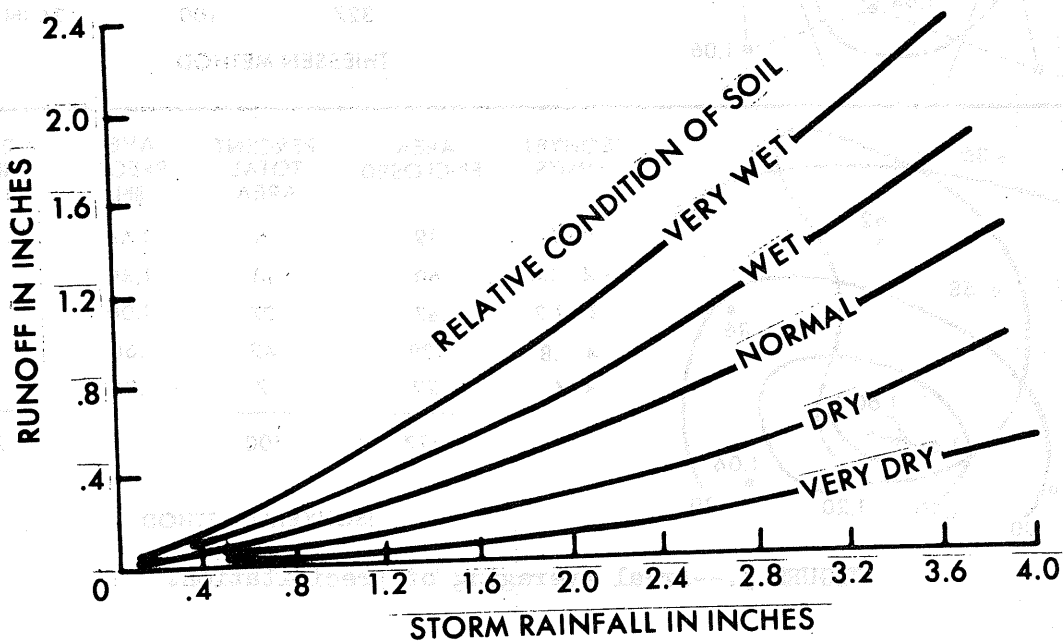



FIGURE 2.--Rainfall-Runoff relation using soil condition as a parameter.

(Fig. 1 is referred to on Page 6)
(Fig. 2 is referred to on Page 7)

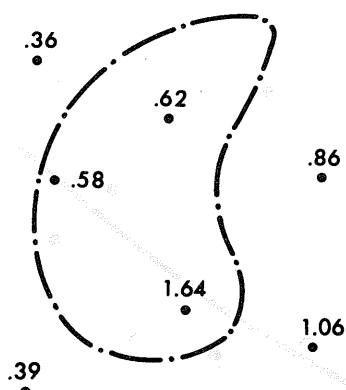


$$\frac{.58 + .62 + 1.64}{3} = \underline{.95 \text{ IN.}}$$

ARITHMETIC MEAN

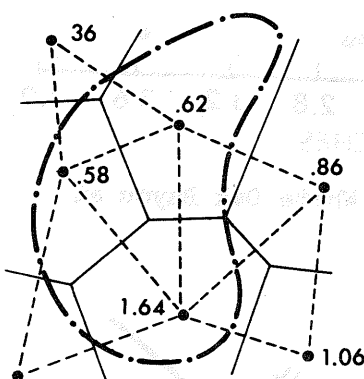

OBSERVED PRECIPITATION (IN.)	POLYGON AREA	PERCENT TOTAL AREA	WEIGHTED PRECIP. (IN.)
.36	2	1	0
.58	77	24	.14
.62	132	40	.25
.79	4	1	.01
1.64	112	34	.56
	327	100	.96 IN.

THIESSEN METHOD

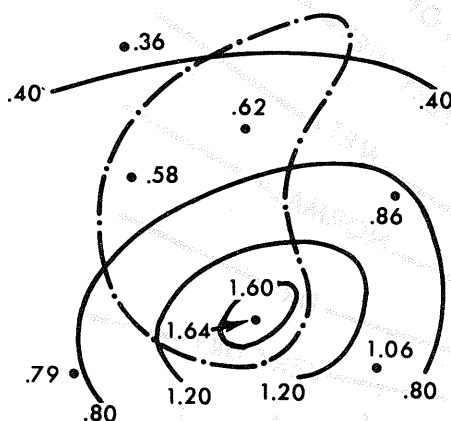

ISOHYET LIMITS	AREA ENCLOSED	PERCENT TOTAL AREA	AVE. PRECIP. (IN.)	WEIGHTED PRECIP. (IN.)
> 1.6	19	6	1.64	.10
1.2 - 1.6	60	18	1.40	.25
.8 - 1.2	87	27	1.00	.27
.4 - .8	139	42	.60	.25
< .4	22	7	.36	.03
	327	100		.90 IN.

ISOHYETAL METHOD

FIGURE 3.--Areal averaging of precipitation.

(Fig. 3 is referred to on Pages 10 and 11)

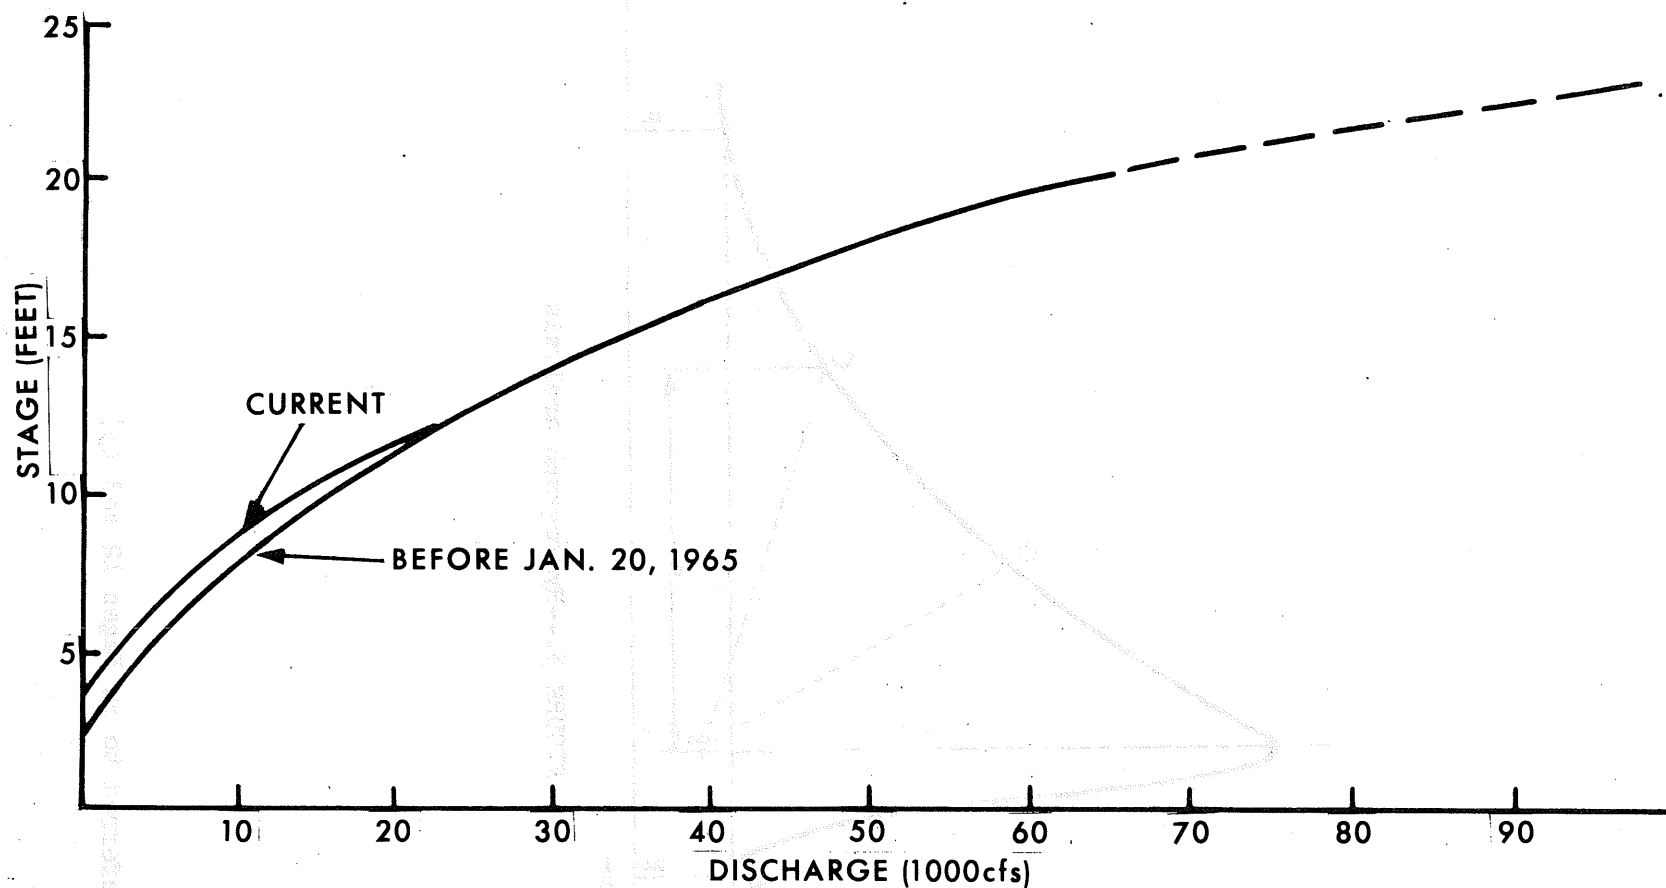


FIGURE 4.--Example rating curve.

(Fig. 4 is referred to on Page 11)

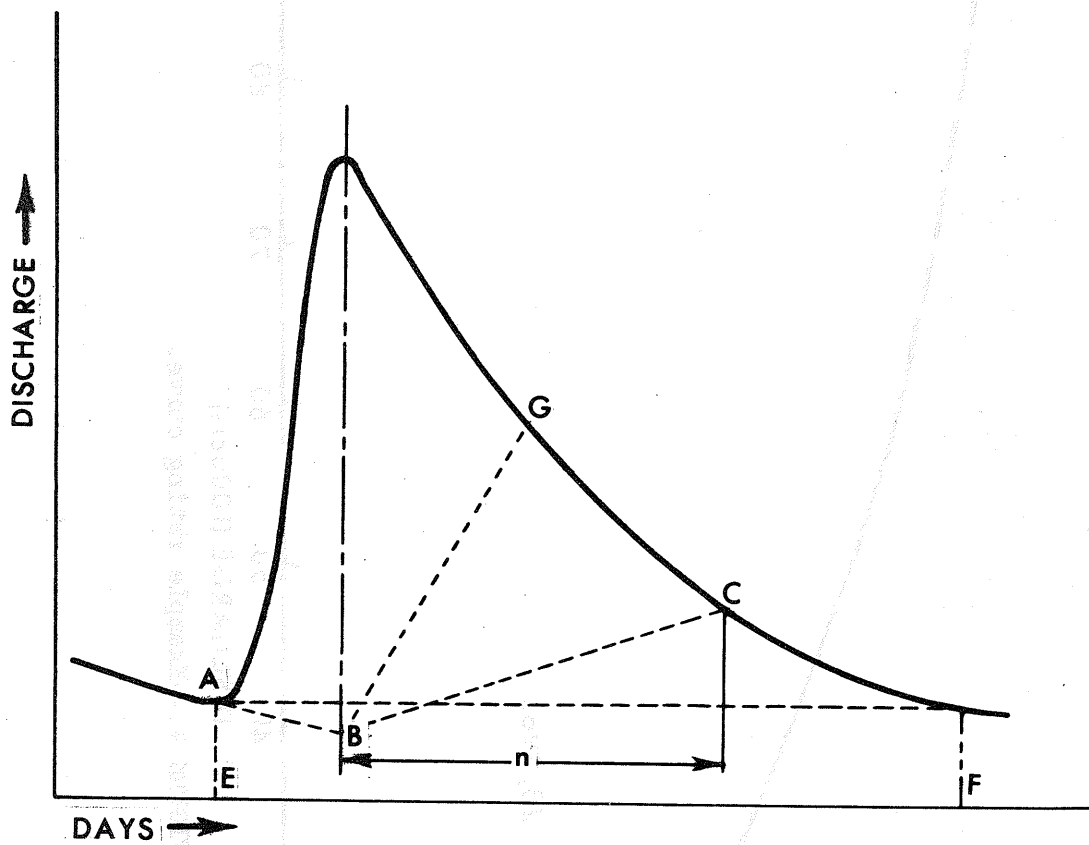


FIGURE 5.--Hydrograph analysis

(Fig. 5 is referred to on Pages 12 and 13)

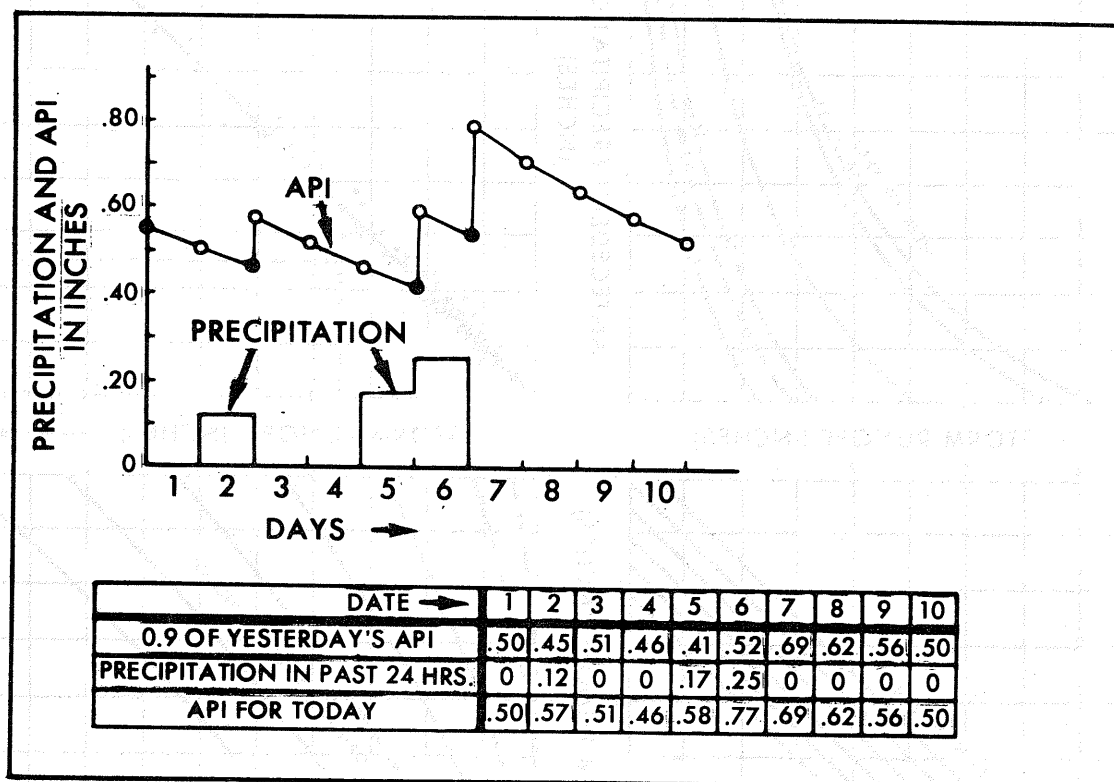


FIGURE 6.--Computation and plotting of Antecedent Precipitation Index (API)

(Fig. 6 is referred to on Pages 8, 13, and 15)

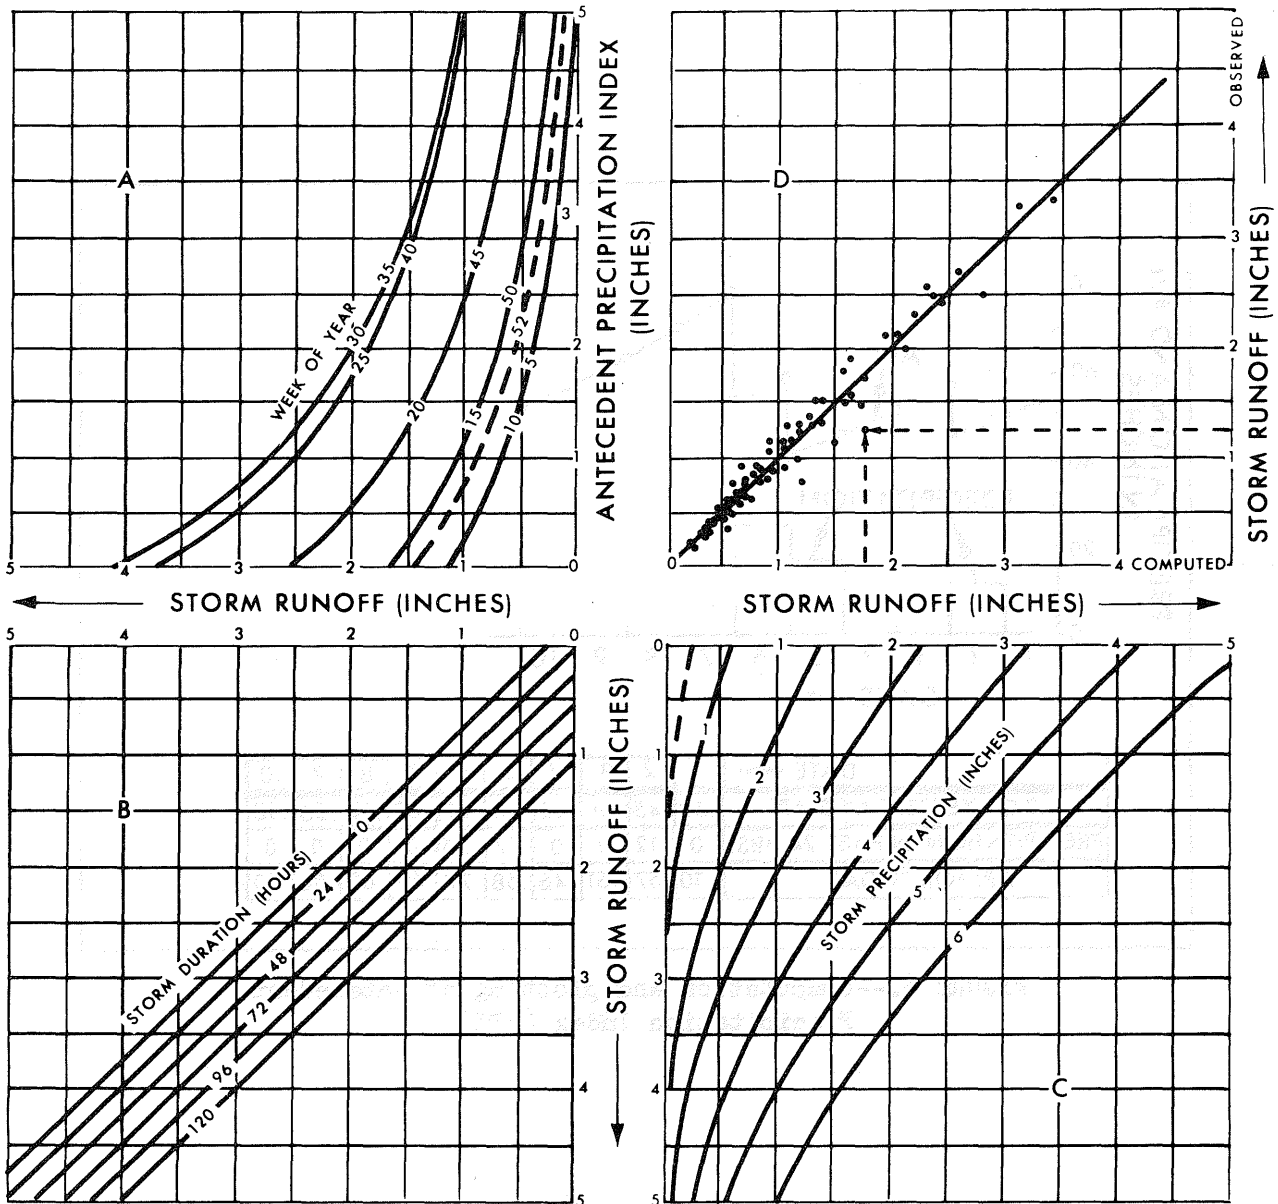


FIGURE 7.--Development of Runoff Relation for the Monocacy River at Jug Bridge, Md.

(Fig. 7 is referred to on Pages 14, 15, and 16)

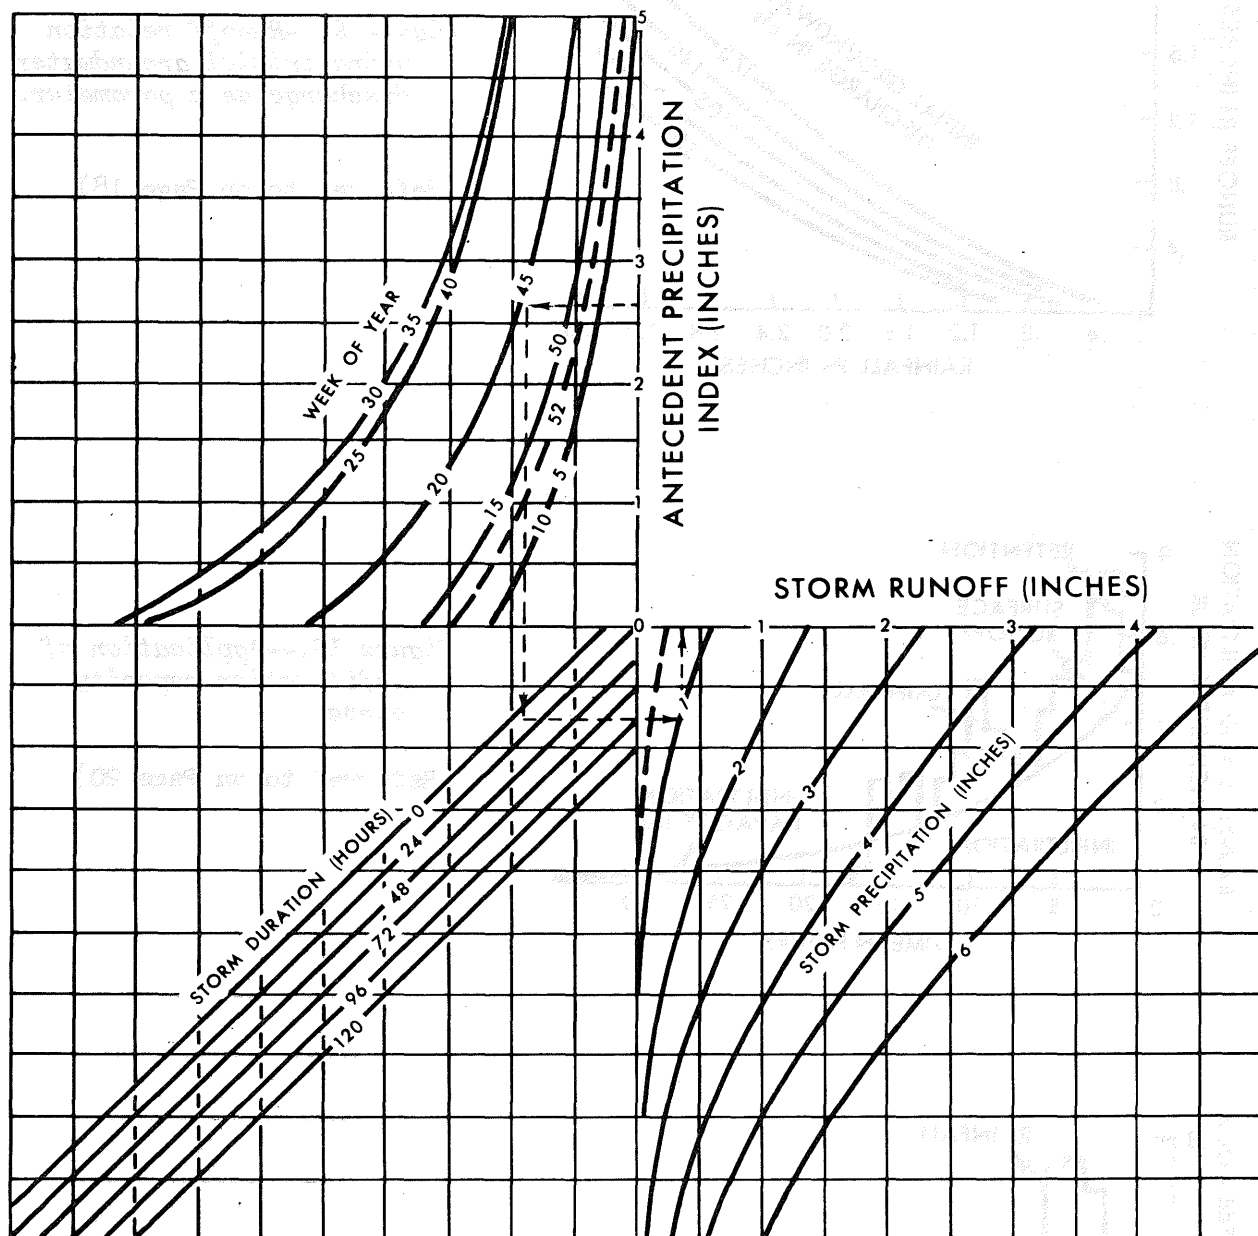


FIGURE 8.--Operational Runoff Relation for the Monocacy River at Jug Bridge, Md.

(Fig. 8 is referred to on Pages 7 and 30)

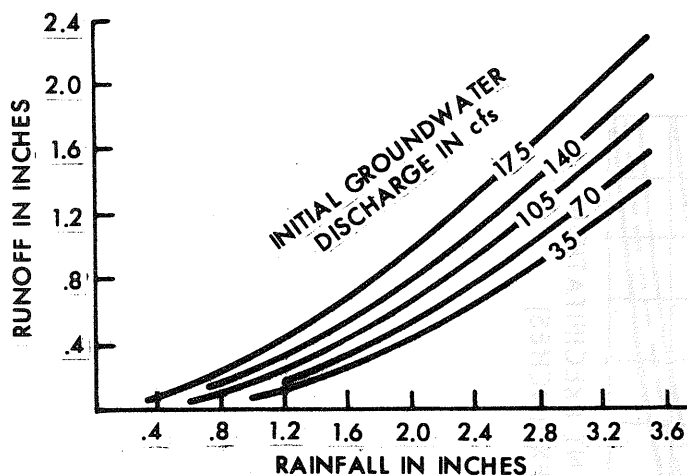


Figure 9.--Runoff relation using initial groundwater discharge as a parameter.

(Referred to on Page 18)

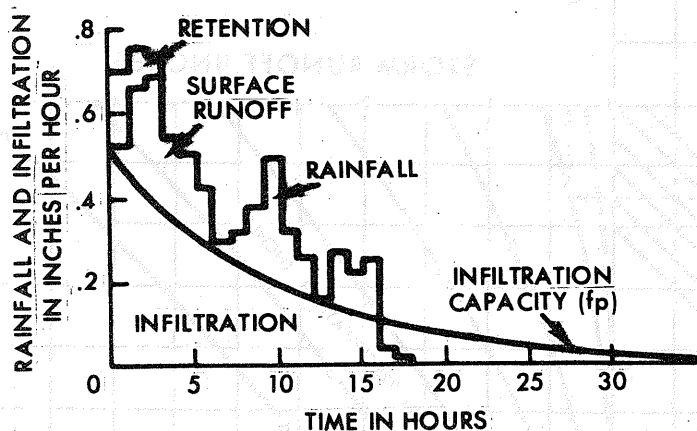


Figure 10.--Application of infiltration capacity curve.

(Referred to on Page 20)

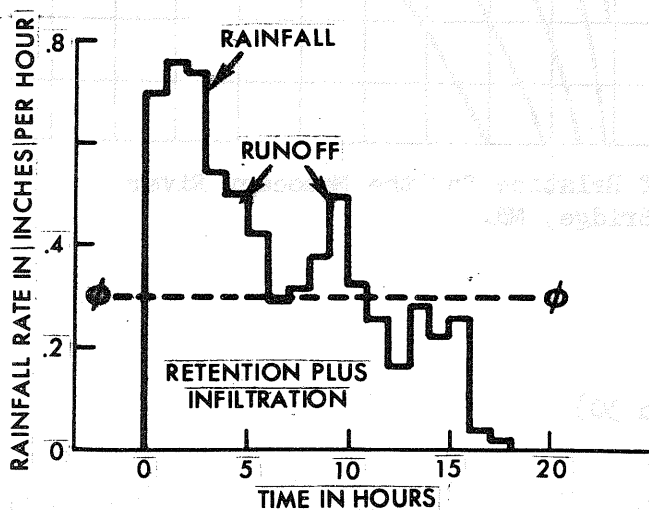


Figure 11.--Application of Φ Index in estimating runoff.

(Referred to on Page 20)

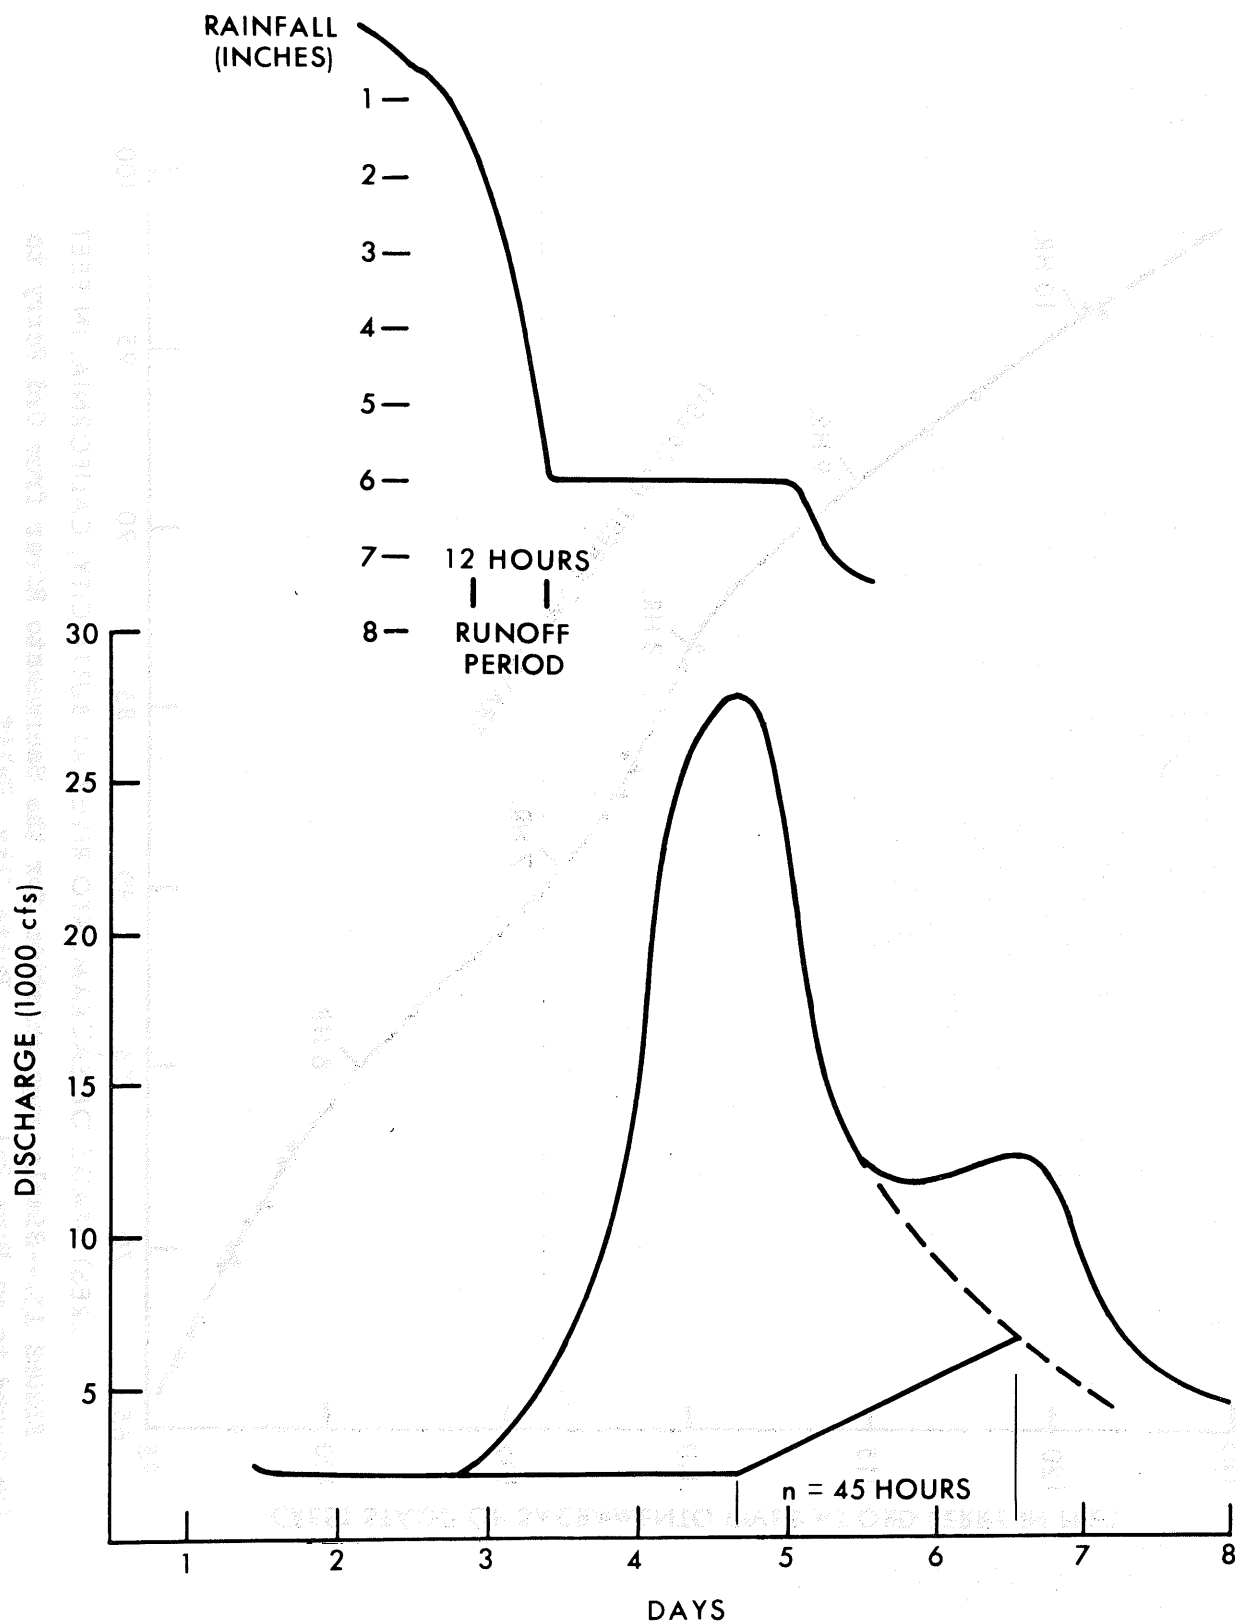


FIGURE 12.--Sample hydrograph
(Fig. 12 is referred to on Pages 23 and 24)

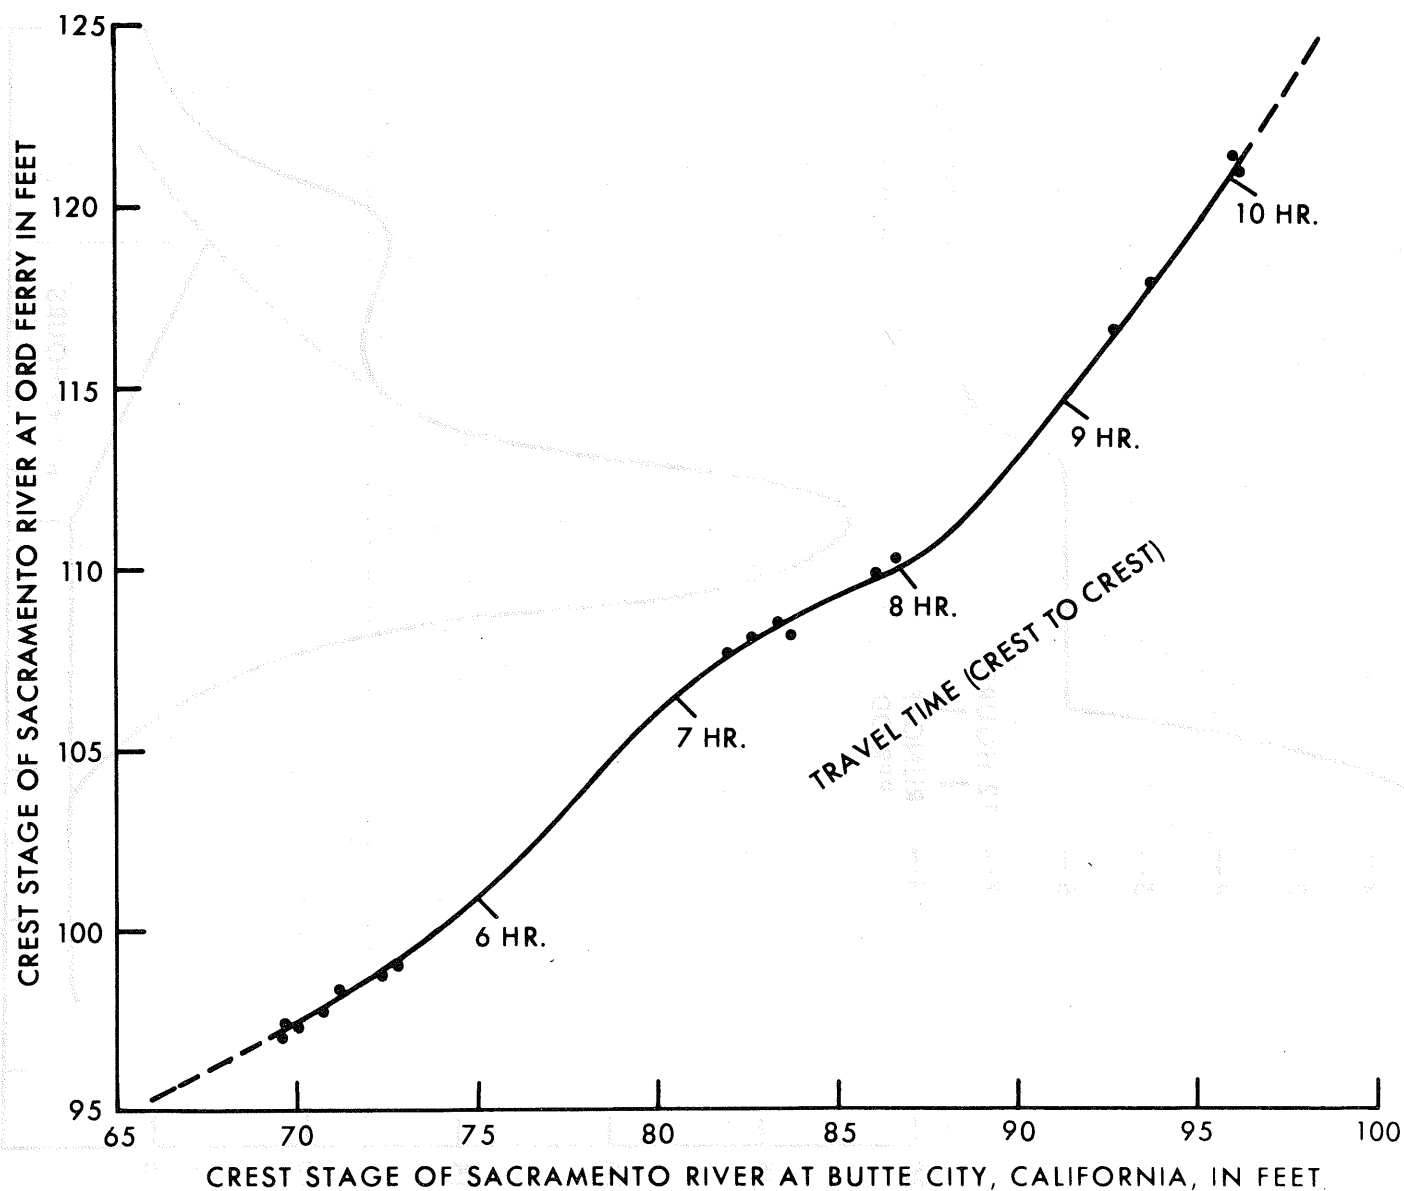


FIGURE 13.--Simple gage relation for the Sacramento River from Ord Ferry to Butte City, Calif.
(Referred to on Page 25)



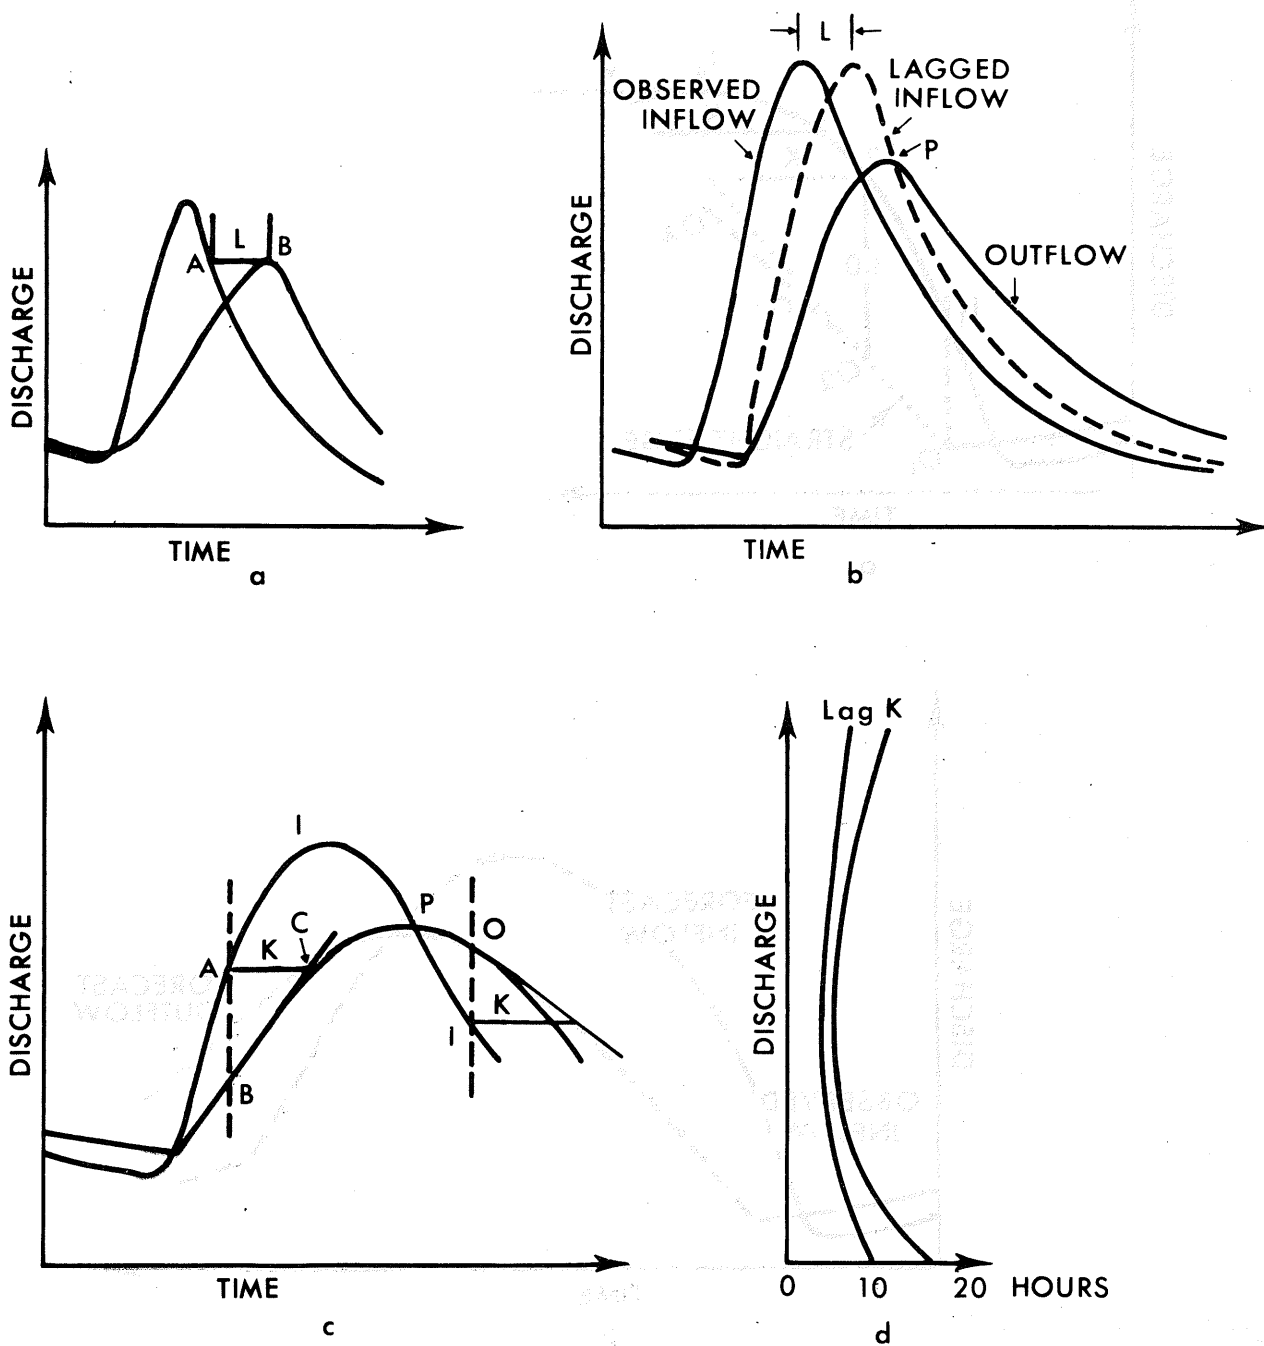


FIGURE 14.--Determining K and L

(Fig. 14 is referred to on Page 26)

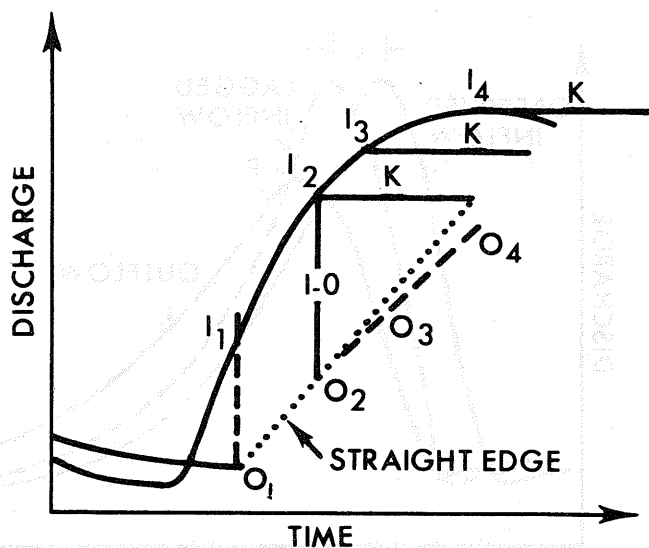


a

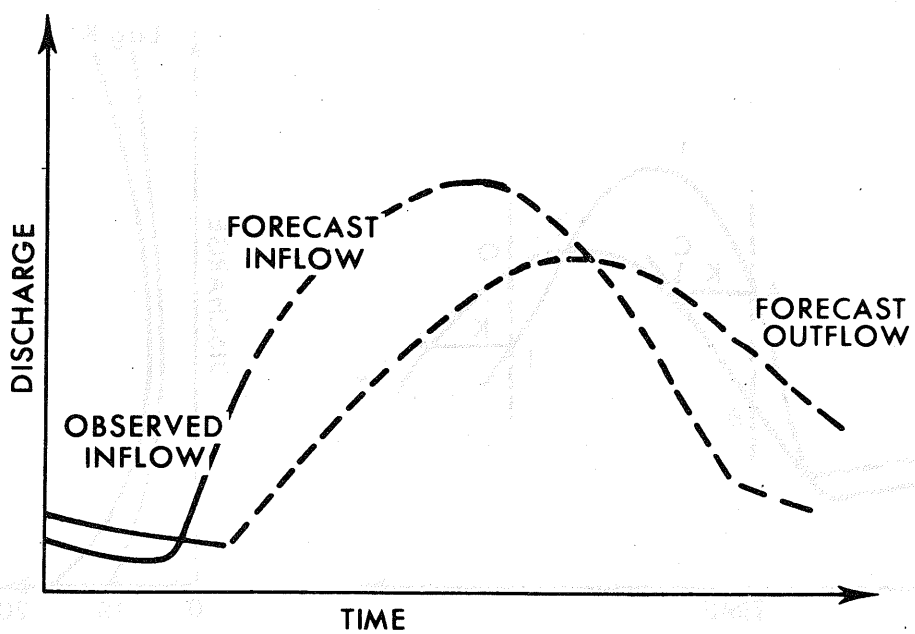

b

FIGURE 15.--K and L Routing

(Fig. 15 is referred to on Page 27)

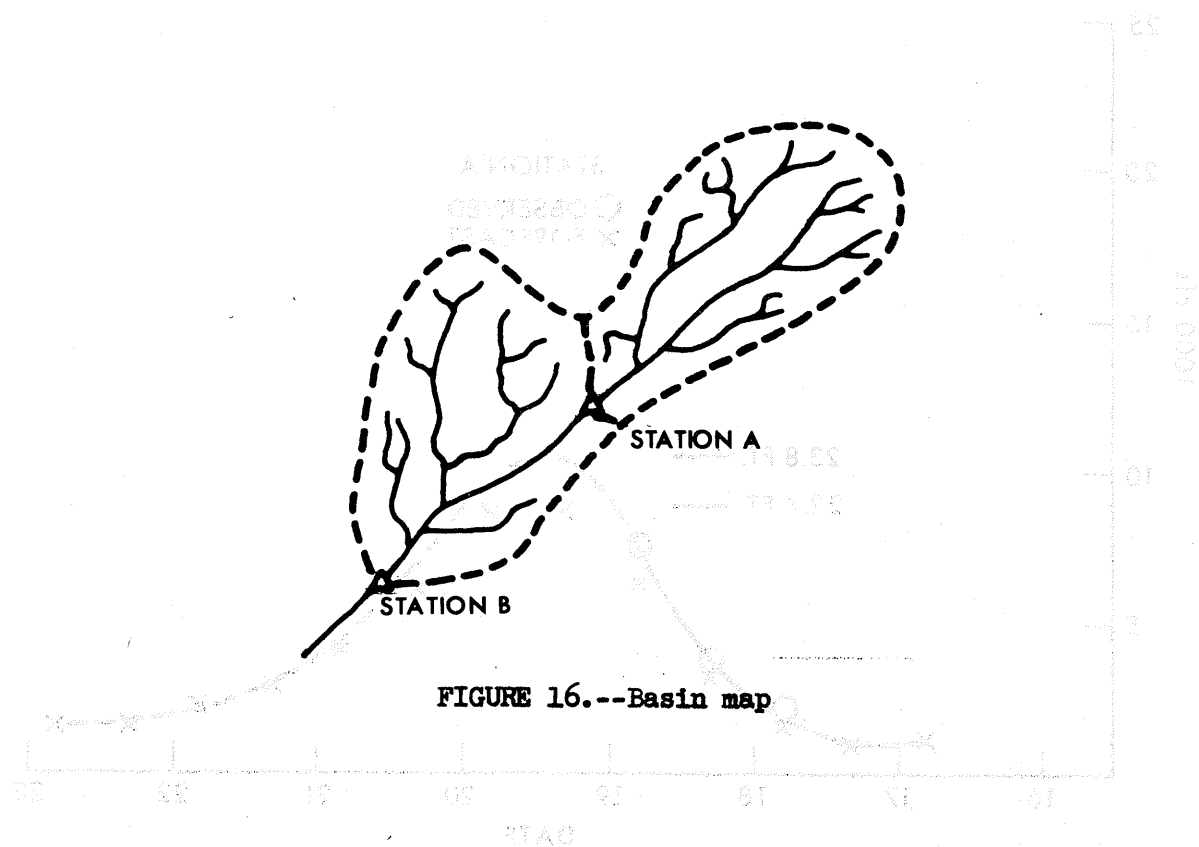

(Fig. 16 is referred to on Page 29)

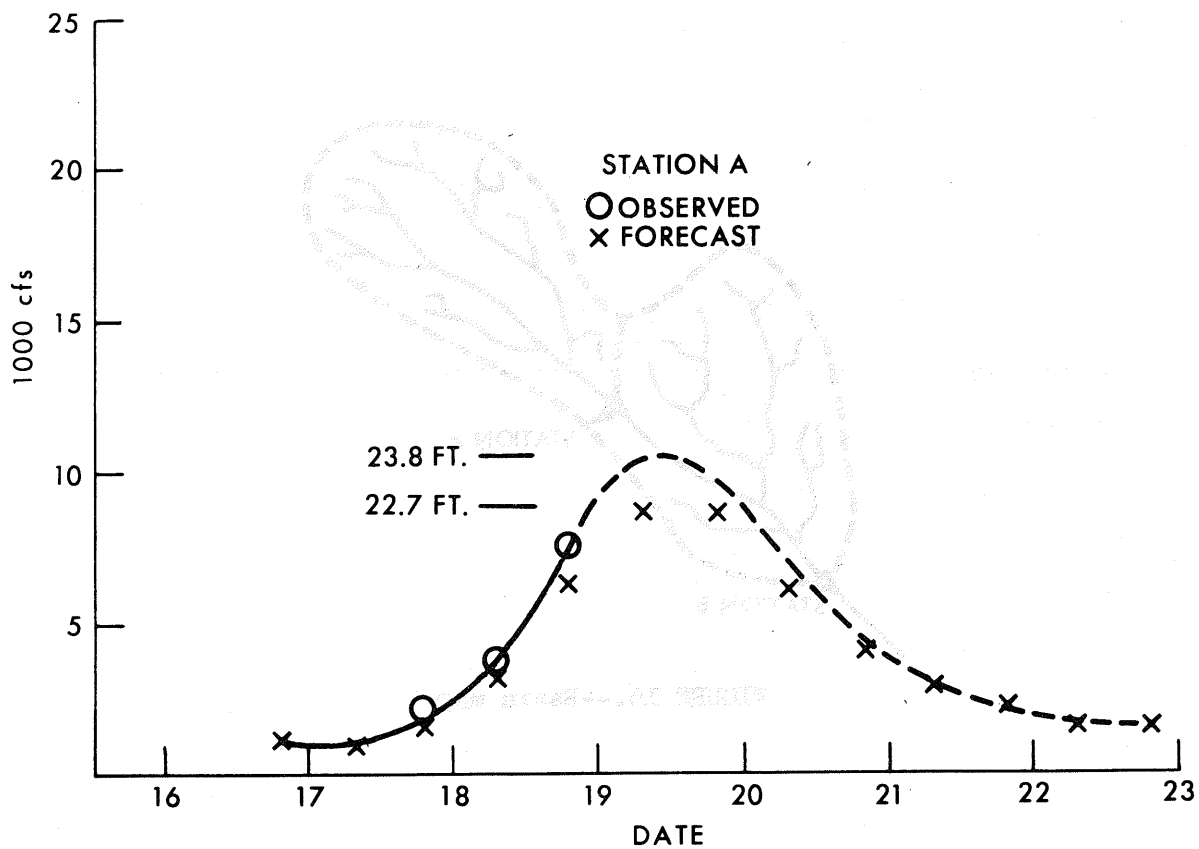


FIGURE 17.--Forecast Hydrograph

(Fig. 17 is referred to on Page 30)

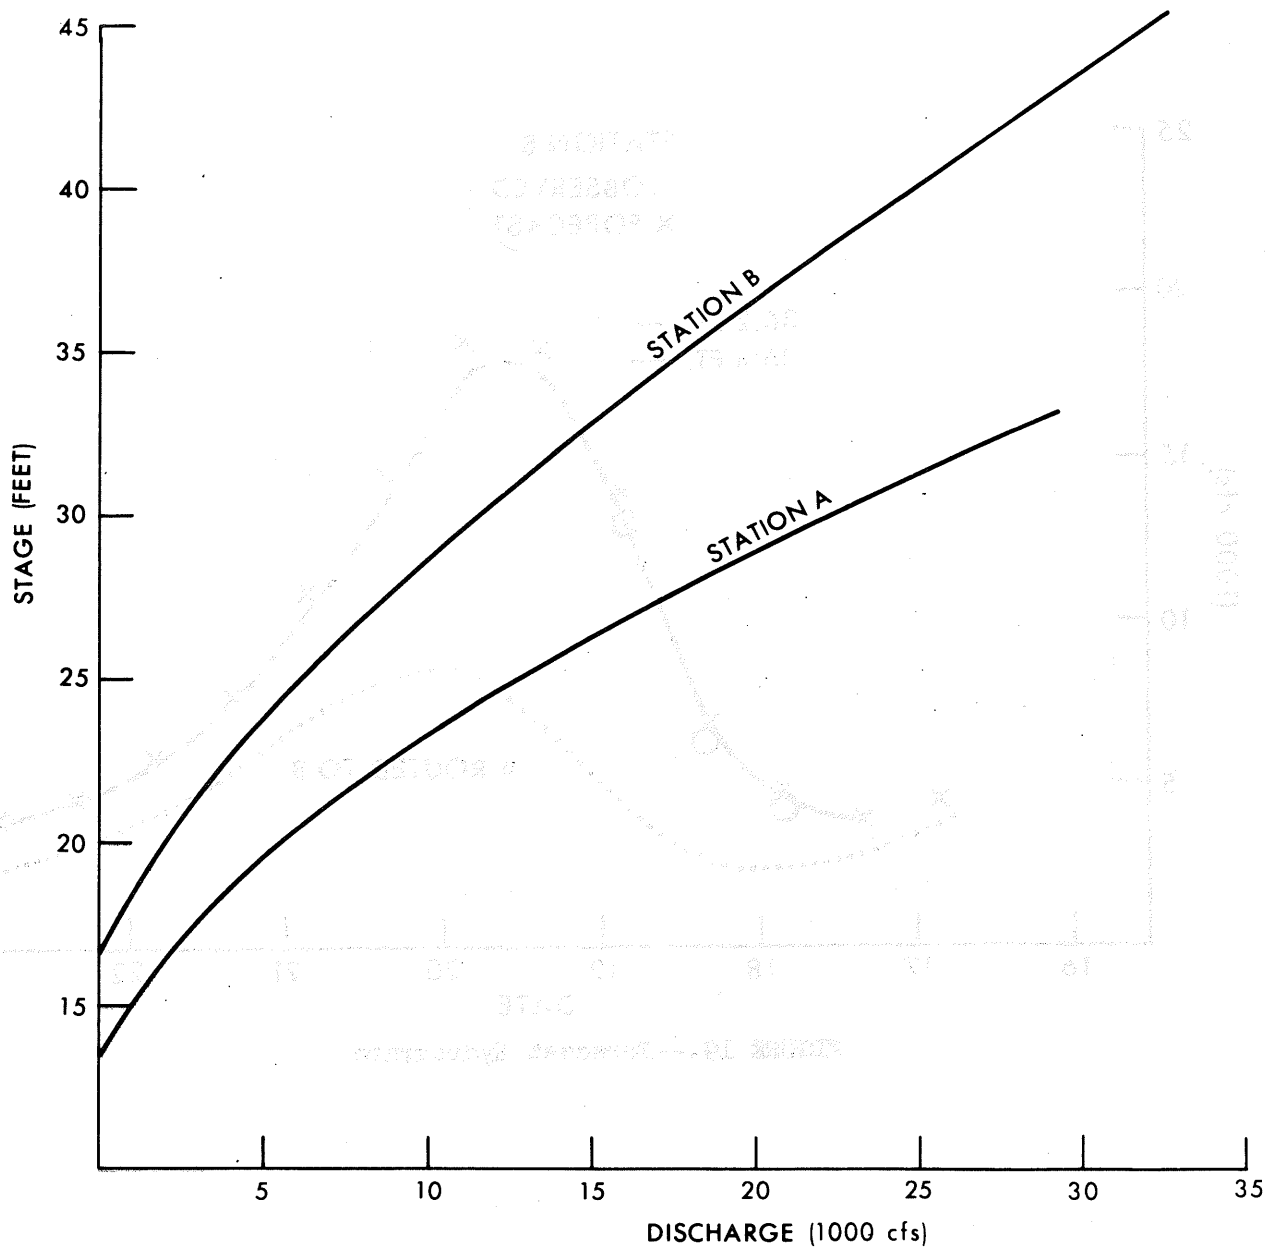


FIGURE 18.--Rating curves

(Fig. 18 is referred to on Page 31)

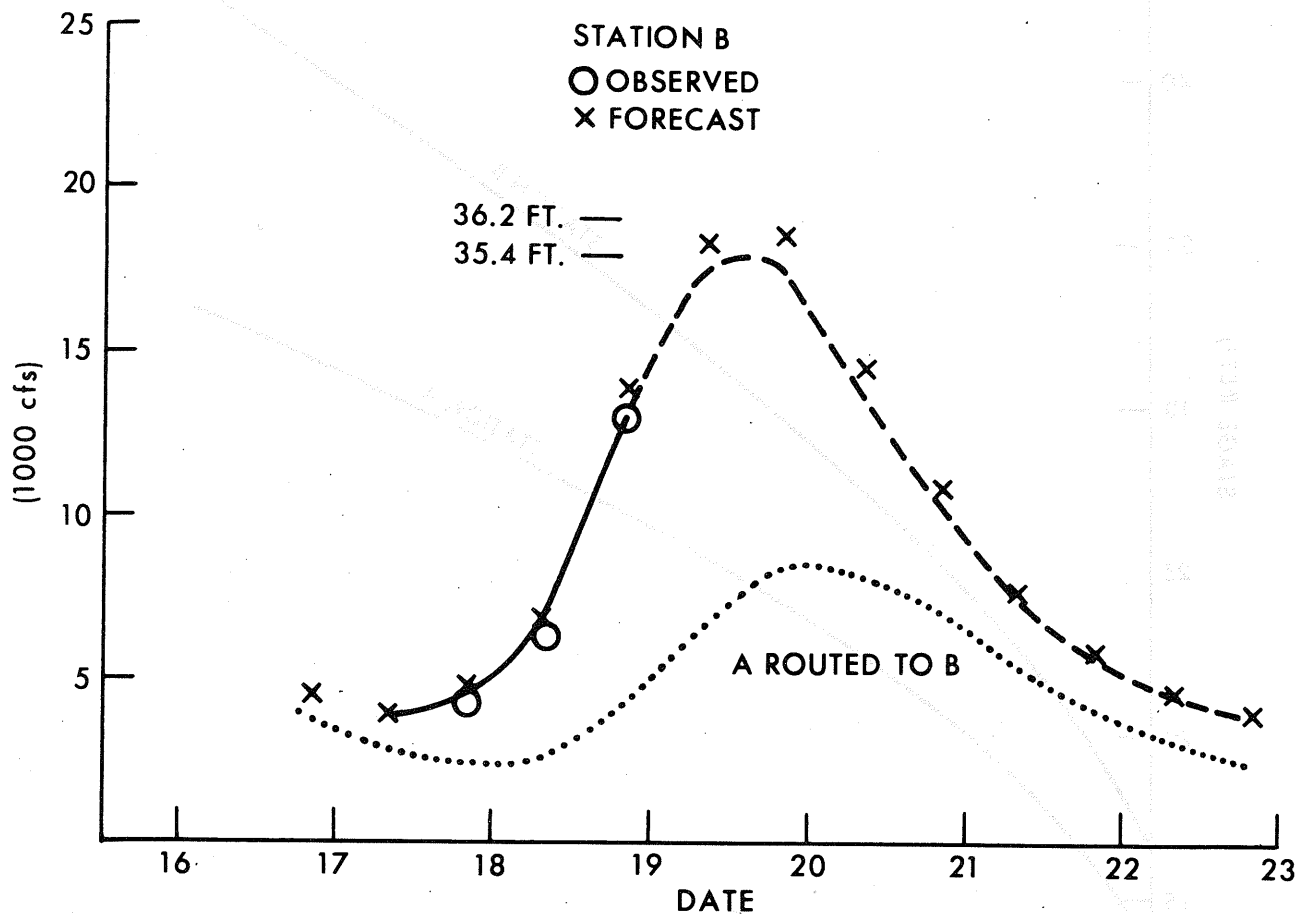


FIGURE 19.--Forecast Hydrograph

(Fig. 19 is referred to on Page 31)

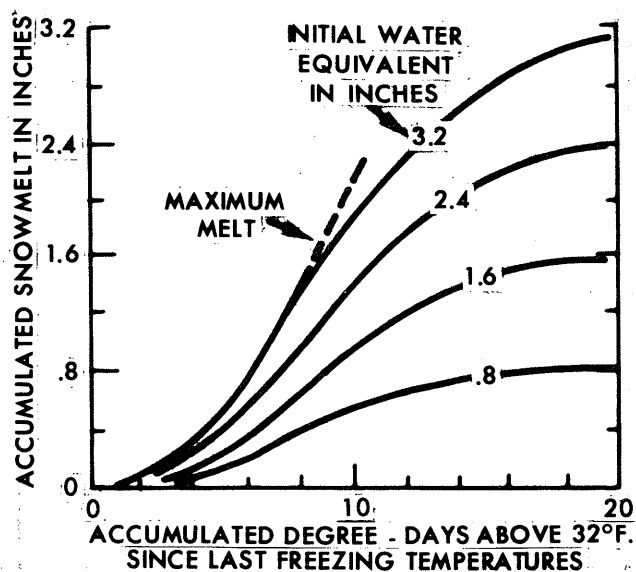


FIGURE 21.--Typical snowmelt relation

(Fig. 20 is referred to on Pages 31 and 32)